

ACTA
SILVATICA
&
LIGNARIA
HUNGARICA

AN INTERNATIONAL JOURNAL
IN FOREST, WOOD
AND ENVIRONMENTAL
SCIENCES

VOLUME 10, NR. 1

2014

ACTA SILVATICA
&
LIGNARIA
HUNGARICA

ACTA
SILVATICA
&
LIGNARIA
HUNGARICA

AN INTERNATIONAL JOURNAL
IN FOREST, WOOD
AND ENVIRONMENTAL
SCIENCES

VOLUME 10, Nr. 1
2014



UNIVERSITY OF WEST HUNGARY
PRESS

ACTA SILVATICA ET LIGNARIA HUNGARICA

AN INTERNATIONAL JOURNAL IN FOREST, WOOD AND ENVIRONMENTAL SCIENCES

issued by the Forestry Commission of the Hungarian Academy of Sciences

The journal is financially supported by the

Hungarian Academy of Sciences (HAS),

Faculty of Forestry, University of West Hungary (FF-UWH),

Simonyi Karoly Faculty of Engineering, Wood Sciences and Applied Arts, University of West Hungary (SKF-UWH),

National Agricultural Research and Innovation Center, Forest Research Institute (NARIC-FRI),

Sopron Scientists' Society of the Hungarian Academy of Sciences (SSS).

Editor-in-Chief:

CSABA MÁTYÁS (FF-UWH, HAS Sopron)

Managing editor:

MAGDOLNA STARK (FF-UWH Sopron)

Editorial Board:

LÁSZLÓ BEJÓ (FWS-UWH Sopron)

NORBERT FRANK (FF-UWH Sopron)

GÁBOR ILLÉS (NARIC-FRI Budapest)

Scientific Committee:

President:

REZSŐ SOLYMOS (HAS Budapest)

Members:

ATTILA BOROVIK (NARIC-FRI Sárvár)

SÁNDOR FARAGÓ (FF-UWH Sopron)

SÁNDOR MOLNÁR (SKF-UWH Sopron)

ANDRÁS NÁHLIK (FF-UWH Sopron)

JÓZSEF ZÁVOTI (SSS Sopron)

JOSEF STROBL (Salzburg, Austria)

MIHÁLY BARISKA (Zürich, Switzerland)

MARION BABIAK (Zvolen, Slovakia)

BORIS HRASOVEC (Zagreb, Croatia)

DIETER PELZ (Feiburg, Germany)

HU ISSN 1786-691X (Print)

HU ISSN 1787-064X (Online)

Manuscripts and editorial correspondence should be addressed to

MAGDOLNA STARK, ASLH EDITORIAL OFFICE

UNIVERSITY OF WEST HUNGARY,

Pf. 132, H-9401 SOPRON, HUNGARY

Phone: +36 99 518 122

Fax: +36 99 329 911

E-mail: aslh@nyme.hu

Information and electronic edition: <http://aslh.nyme.hu>

The journal is indexed in the CAB ABSTRACTS database of CAB International; by SCOPUS, Elsevier's Bibliographic Database, by EBSCOhost database and by De Gruyter Open Sp. z. o. o., Warsaw

Published by UNIVERSITY OF WEST HUNGARY PRESS,
BAJCSY-ZS. U. 4., H-9400 SOPRON, HUNGARY

Cover design by ANDREA KLAUSZ

Printed by LÖVÉR-PRINT KFT., SOPRON

ACTA SILVATICA ET LIGNARIA HUNGARICA

Vol. 10, Nr. 1

Contents

MISIK, Tamás – KÁRÁSZ, Imre – TÓTHMÉRÉSZ, Béla: Understory Development in an Oak Forest in Northern Hungary: the Subcanopy Layer	9
KERÉNYI-NAGY, Viktor – DEÁK, Tamás – KÓSA, Géza – BARTHA, Dénes: Genetic Studies of Selected „Black-Fruit” Hawthorns: <i>Crataegus nigra</i> WALDST. et KIT., <i>C. pentagyna</i> WALDST. et KIT. and <i>C. chlorosarca</i> MAXIM.	23
KVIETKOVÁ, Monika – BARCÍK, Štefan – GAŠPARÍK, Miroslav: Optimization of the Cutting Process of Wood-Based Agglomerated Materials by Abrasive Water-Jet	31
POLGÁR, András – PÁJER, József: Enhancement of the Corporate Environmental Performance	49
Forest Hydrology papers	65
GRIBOVSKI, Zoltán: Diurnal Method for Evapotranspiration Estimation from Soil Moisture Profile	67
TORMA, Péter – SZÉLES, Borbála – HAJNAL, Géza: Applicability of Different Hydrological Model Concepts on Small Catchments: Case Study of Bükkös Creek, Hungary.....	77
ZAGYVAINÉ KISS, Katalin Anita – KALICZ, Péter – CSÁFORDI, Péter – GRIBOVSKI, Zoltán: Forest Litter Interception Model for a Sessile Oak Forest	91
GRIBOVSKI, Zoltán – KALICZ, Péter – BALOG, Kitti – SZABÓ, András – TÓTH, Tibor: Comparison of Groundwater Uptake and Salt Dynamics of an Oak Forest and of a Pasture on the Hungarian Great Plain.....	103

ACTA SILVATICA ET LIGNARIA HUNGARICA

Vol. 10, Nr. 1

Tartalomjegyzék

MISIK Tamás – KÁRÁSZ Imre – TÓTHMÉRÉSZ Béla: A cserjeszint fejlődése Észak-Magyarországon egy tölgyes erdőben: az alsó lombkoronaszint	9
KERÉNYI-NAGY Viktor – DEÁK Tamás – KÓSA Géza – BARTHA Dénes: Három kiválasztott “fekete termésű” galagonyafaj genetikai vizsgálata: <i>Crataegus nigra</i> WALDST. et KIT., <i>C. pentagyna</i> WALDST. et KIT. és <i>C. chlorosarca</i> MAXIM.	23
KVIETKOVÁ, Monika – BARCÍK, Štefan – GAŠPARÍK, Miroslav: A faalapú agglomerált anyagok folyadéksugaras vágásának optimalizálása	31
POLGÁR András – PÁJER József: A vállalati környezeti teljesítmény fejlesztése	49
Erdészeti hidrológiai tanulmányok	65
GRIBOVSZKI Zoltán: A talajnedvesség profil napi ingadozásán alapuló párolgásbecslő módszer	67
TORMA Péter – SZÉLES Borbála – HAJNAL Géza: Különböző hidrológiai modellkonceptiók alkalmazhatósága magyarországi kisvízgyűjtőkön: esettanulmány a Bükkös-patak példáján	77
ZAGYVAINÉ KISS Katalin Anita – KALICZ Péter – CSÁFORDI Péter – GRIBOVSZKI Zoltán: Avarintercepció modellezése egy kocsánytalan tölgyesben	91
GRIBOVSZKI Zoltán – KALICZ Péter – BALOG Kitty – SZABÓ András – TÓTH Tibor: Egy alföldi kocsányos tölgyes és egy szomszédos gyepterület talajvízfelvételének és sódinamikájának összehasonlítása	103

Understory Development in an Oak Forest in Northern Hungary: the Subcanopy Layer

Tamás MISIK^{a*} – Imre KÁRÁSZ^a – Béla TÓTHMÉRÉSZ^b

^aDepartment of Environmental Science, Eszterházy Károly College, Eger, Hungary

^bDepartment of Ecology, University of Debrecen, Debrecen, Hungary

Abstract – Structural changes in the shrub layer were analysed in a Hungarian oak forest after the oak decline pandemics. This paper focuses on the following questions: (1) which of the woody species tolerated better the forest conditions after oak decline? (2) What are the ecological factors that explain the successful response of woody species to changes in light and thermal conditions? In the monitoring plot, the structural condition of specimens only above 8.0 m was observed. After the appearance of oak decline some *Acer campestre*, *Cornus mas* and *Acer tataricum* specimens appeared that reached between 8.0-13.0 m in height. Significant differences were revealed between top canopy density and foliage cover of the subcanopy and between top canopy density and mean cover of field maple. The findings of the study indicate that the forest responded to oak decline with significant structural rearrangement in the shrub layer and that three woody species compensated for the remarkable foliage loss in the top canopy. These species formed a second crown layer directly below the canopy formed by oaks.

shrub community / woody species / *Acer campestre* L. / cover / dead oaks

Kivonat – A cserjeszint fejlődése Észak-Magyarországon egy tölgyes erdőben: az alsó lombkoronaszint. Egy magyarországi tölgyerdő cserjeszintjének a tölgypusztulás utáni strukturális változásait vizsgáltuk. Ez a dolgozat a következő kérdésekre fókuszál: (1) melyik fásszárú fajok reagáltak jobban a tölgyek pusztulását követően az erdő kondíciójára? (2) Milyen ökológiai tényezők magyarázhatják a fásszárú fajok sikeres válaszát a megváltozott fény- és hőviszonyokra? A monitoring területen a 8,0 m feletti egyedeknek a strukturális kondícióját vizsgáltuk. A tölgypusztulás kezdete után néhány *Acer campestre*, *Cornus mas* és *Acer tataricum* egyed jelent meg elérve a 8,0-13,0 m közötti magasságot. Szignifikáns eltérést találtunk a felső lombkorona denzitása és az alsó lombkorona borítása, illetve a felső lombkorona denzitása és a mezei juhar átlagos lombvetülete között. A kutatásunk megállapításai azt jelzik, hogy az erdő a cserjeszint jelentős strukturális átrendeződésével válaszolt a tölgypusztulásra, és három fásszárú faj pótolta a felső lombkorona jelentős lombvesztését. Ezek a fajok második lombkoronaszintet hoztak létre közvetlenül a tölgyek alkotta lombkorona alatt.

cserjeközösség / fásszárú fajok / *Acer campestre* L. / borítás / kipusztult tölgyek

* Corresponding author: misiktom@gmail.com; H-3300 EGER, Leányka utca 6.

1 INTRODUCTION

Biotic factors such as climate change and extreme weather conditions (Bolte et al. 2010, Kotroczó et al. 2012), pathogens such as root diseases (Jung et al. 2000, Szabó et al. 2007), and insect gradations (Csóka 1998, Bruhn et al. 2000, Moraal – Hilszczanski 2000) and abiotic factors, such as human influence, climate change, fires and air pollution (Mészáros et al. 1993, Signell et al. 2005, Kabrick et al. 2008) lead to a modified functioning of the whole forest ecosystem and may lead to forest decline. Tree decline has heavily affected oak species, and especially *Quercus petraea* Matt. L. (sessile oak) trees in European countries (Freer-Smith – Read 1995, Thomas – Büttner 1998). Oak death has been described as a widespread and complex phenomenon (Klein – Perkins 1987, Bruck – Robarge 1988). An increase in the death of oak forests has been observed in many regions of Hungary since 1978 (Igmándy 1987). In 1976, oak decline began in Slovakia, found its way to former Yugoslavia by 1979, and finally reached Austria in 1984 (Hämmerli – Stadler 1989). Many papers have reported that increased oak mortality is leading to changes in forest dynamics (Moraal – Hilszczanski 2000, Woodall et al. 2005).

Relatively few studies deal with shrub communities and shrub layer dynamics after oak death and the relationship between the tree and shrub layer (Légaré et al. 2002). Shrub dynamics is linked to the ecological functioning of forest ecosystems (McKenzie et al. 2000, Brosofske et al. 2001, Augusto et al. 2003). The shrub layer is affected by light availability when the canopy is closed (Légaré et al. 2002), leading to negative correlations of shrub layer species richness and/or cover with tree basal area (Hutchinson et al. 1999). Shrubs may provide important indications of site quality, overstory regeneration patterns and conservation status (Hutchinson et al. 1999). Tree species diversity had a positive relationship to shrub cover because a diverse overstory generally created more canopy gaps (Gazol – Ibáñez 2009). The tree layer structure strongly influences shrub species cover by altering microsites, resources and environmental conditions (Oliver – Larson 1996, Stone – Wolfe 1996). The variability in below tree layer light availability and canopy openness strongly influence individual performance and community composition of shrub and herb plants in temperate forest (Hughes – Fahey 1991, Goldblum 1997).

Most papers only used changes in structural conditions in the tree layer to monitor the ecological process in the forest community after tree decline (Bussotti – Ferretti 1998, Brown – Allen-Diaz 2009). The studies of shrub species performed have mostly focused on the static population structure (age and size structures); these parameters have been described by a negative exponential model (Tappeiner et al. 1991, Stalter et al. 1997). Other studies have focused on the cover and diversity of shrubs (e.g. Kerns – Ohmann 2004, Gracia et al. 2007). In this paper we used frequency, size and cover variables complemented with basal area to obtain a more complete picture of shrub layer dynamics.

The species composition of the canopy layer was stable until 1979 and the healthy *Q. petraea* and *Quercus cerris* L. (Turkey oak) also remained constant in the mixed-species forest stand (*Quercetum petraeae-cerris* Soó 1963) of Síkfőkút. Serious oak decline was first reported in 1979–80 and by 2012, 62.4% of the oaks had died; this decline resulted in an opening of the canopy. The decline affected both forest stands; however it affected sessile oak considerably more. The mortality rate of Turkey oak trunks was lower, only 16% over the last three decades (Kotroczó et al. 2007). The canopy species composition has changed little, only some trees of *Tilia cordata* Mill. and *Carpinus betulus* L. lived as new codominant species on the site. The regeneration of oak species is rather poor and the cover of the herb layer is low. The possible biotic and abiotic factors of oak decline and the effect of decline on the structural condition of the forest community on the Síkfőkút plot have also been studied in many papers (e.g. Jakucs 1985, 1988). Jakucs' results (1988) show that the soil acidification

induced by the disappearance of mycorrhizal fungi and the air pollutants that promote water and nutrient absorption, have been evaluated and identified as primary causes of deciduous forests' decline. *Q. petraea* suffered a more drastic decline than *Q. cerris* trees in Hungarian woodlands. Later this theory was brought into question by further research (in particular, drought impact). The results of Mészáros et al. (2011) suggest that magnitude of tree water deficit variation (ΔW) was always smaller in *Q. cerris* than in *Q. petraea*. In contrast, *Q. cerris* trees exhibited larger daytime averages and maxima of sap flow density. Béres et al. (1998) state that the bright – i.e. water filled - outer layer can be considered as the active new xylem. This layer is considerably thicker in the case of *Q. cerris* than in the case of *Q. petraea*. The inner compartment of *Q. petraea* contains a very small amount of water and there is no difference between heartwood and sapwood. On the other hand, *Q. cerris* is clearly different, with higher density heartwood and low density sapwood compartments.

Specifically, we address the following questions: (1) What are the most important structural changes in the forest interior after serious oak decline? (2) What kind of woody species in the understory have the most successful response to oak death? (3) What are the ecological factors that explain the successful response of the woody species to changes in light and thermal conditions? (4) Can the forest make up for the significant losses of leaf canopy by means of new structural foliage formation? (5) Finally, what is the interaction between the woody species of the subcanopy layer?

2 MATERIAL AND METHODS

2.1 Study site

The 27 ha reserve research site is located in the Bükk Mountains of northeast Hungary (47°55' N, 20°46' E) at a distance of 6 km from the city of Eger at an altitude of 320–340 m a.s.l.. The site was established in 1972 by Jakucs (1985) for the long-term study of forest ecosystems. Mean annual temperature is 9.9 °C and mean annual precipitation ranges typically from 500 to 600 mm. The mean annual temperature and precipitation are based on measurements at the meteorological recording tower of the site. Description of the geographic, climatic, soil conditions and vegetation of the forest was undertaken in detail by Jakucs (1985, 1988). The most common forest association in this region is *Quercetum petraeae-cerris* with a dominant canopy of *Q. petraea* and *Q. cerris*. Both oak species are important dominant native deciduous tree species of the Hungarian natural woodlands. It was detected on subcanopy layer of the most sessile oak-Turkey oak stand in Hungary with *Acer campestre* L., *Sorbus torminalis* L. Crantz, *Pyrus pyrausta* L. Burgsd., *Ulmus procera* Salisb. and *T. cordata* species. Other codominant tree species of the study site included *Ca. betulus*, *Prunus avium* L. and *T. cordata*. The plot under study is made up of evenly-aged trees, is at least 95–100 years old temperate deciduous forest and has not been harvested for more than 50 years.

2.2 Sampling and data analysis

Conditions in the shrub layer were monitored at regular intervals on a 48 m × 48 m plot at the research site, which was subdivided into 144 permanent subplots, each 4 m × 4 m in size. The investigations were performed during the growing seasons. Monitoring activities started in 1972 and repeated shrub layer inventories took place in 1982, 1988, 1993, 1997, 2002, 2007 and 2012. In 2012 three 10 m × 10 m new fixed plots were selected for vegetation sampling to confirm the detected shrub layer development of the site. Orientation of these extra plots was randomly determined. These plots were subdivided into 16 2.5 m × 2.5 m subplots to

determine species occurrence of the understory. Canopy trees were classified as sessile oak and Turkey-oak tree species > 13.0 m in height and ≥ 10.0 cm in diameter at breast height (DBH). Trees were classified as subcanopy trees when between 8.0–13.0 m in height.

In each of the subplots and new plots the following measurements were carried out: species composition, frequency (occurrence % in subplots), species density, height, diameter, basal area and cover of each subcanopy species. The species' density was also determined in plots and the data was extrapolated for one hectare. In stand No. 18 (1982) – 69 (2012) individuals of subcanopy species were sampled in the last decades and then subjected to mean height, mean diameter and mean cover analysis. Plant height was measured with a scaled pole and shoot diameter at 5.0 cm above the soil surface in two directions (if the shape of the shoot of shrub individuals was not regular) with a digital caliper in a field study and the measurement results were averaged.

Within each plot the stand basal area (BA, $\text{m}^2 \text{ha}^{-1}$) of subcanopy woody species was calculated from the measured diameters of all subcanopy specimens. Location and percentage cover of the subcanopy trees and high shrubs was also mapped together every 4 to 5 years, beginning in 1972. Many studies included the method of creating a foliage map from the shrubby vegetation (e.g. Jakucs 1985). The foliage map was built in a GIS environment. Based on the digitized map we estimated the foliage area of subcanopy trees and shrub individuals with the Spatial Analysis Tools - Calculate Area function of the GIS. The correlation analysis was used to determine and quantify the connection between stand density and subcanopy layer condition on the monitoring plot from 1982, by using the following structure variables as dependent variables: (1) frequency (2) mean height and diameter (3) mean cover (4) mean and total basal area of subcanopy species. One-way ANOVA with the Tukey's HSD test was used as a post-hoc test if necessary to determine the significant differences among subcanopy species by occurrence frequencies, mean cover and mean basal area. Statistical analysis was performed using PAST statistical software and significant differences for all statistical tests were evaluated at the level of $P \leq 0.05$ or $P \leq 0.01$.

3 RESULTS

Once oak decline had set in, 3 native woody species were identified across the entire study area from 1982 in the new subcanopy layer; *A. campestre* (field maple), *Cornus mas* L. (European cornel) and *Acer tataricum* L. (Tatar maple) were present as subcanopy species in the sample site. In the new plots only some *A. campestre* individuals and single *C. mas* composed this layer. The average number of subcanopy woody specimens per one hectare has varied from 73 to 238 over the past 2 decades. The total top canopy density decreased from 651 to 305 trees ha^{-1} . In contrast, *A. campestre* increased in density (from 56 to 204 specimen's ha^{-1}) and density of *A. tataricum* and *C. mas* did not change in importance (Figure 1).

The correlation analysis did show a non-significant association between living oak tree density and occurrence frequency of the subcanopy tree species ($r = 0.75$, $P > 0.05$). The species with the highest occurrence in subplots was *A. campestre* with rates of 6.3–25.7% (Table 1). A significant relationship between oak tree density and *A. campestre* occurrence frequency ($r = 0.77$, $P \leq 0.05$) was observed between 1982 and 2012, this relationship was not significant in the cases of *A. tataricum* and *C. mas* ($r = 0.21$ and 0.47 , $P > 0.05$) between 1982 and 2012 was observed. The one-way ANOVA indicated significant differences among occurrence frequencies of woody species (Table 2).

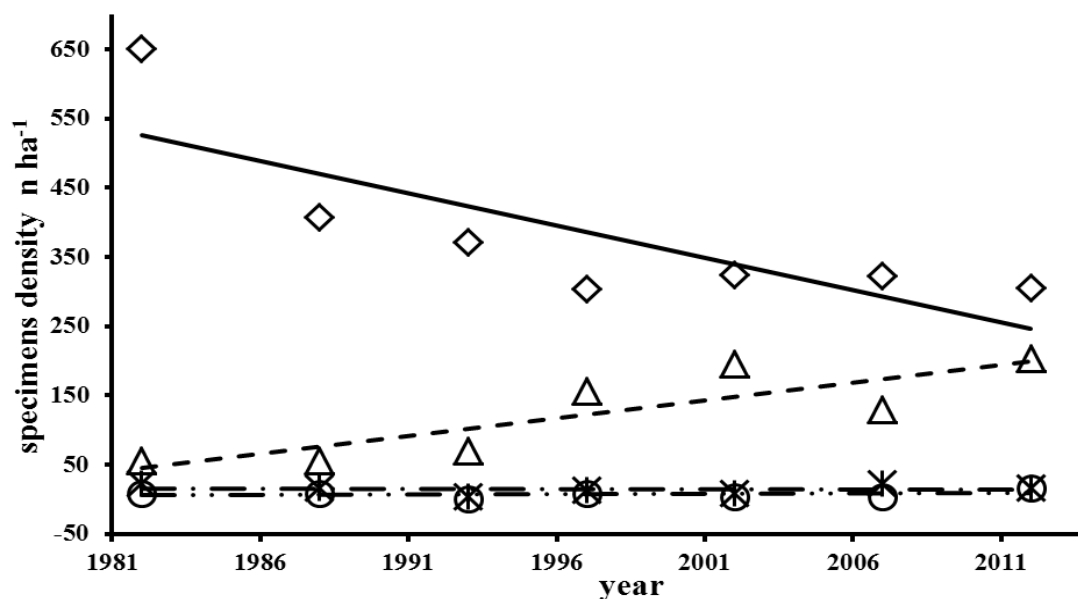


Figure 1. Density trend of oak canopy species and subcanopy woody species for the period from 1982 to 2012 on the monitoring plot.

Notation: —, deltoid – living oak trees; ---, triangle – *A. campestre*; - · - ·, circle – *A. tataricum*; · · · ·, asterisk – *C. mas*

Table 1. Frequency condition of the subcanopy woody species on the monitoring and new plots over the period 1982–2012 ($N = 144$ subplots; $N^* = 48$ subplots)

subcanopy species	occurrence frequency (%) in subplots							
	1982	1988	1993	1997	2002	2007	2012	2012*
<i>A. campestre</i>								
8–13 m	6.3	6.3	12.5	23.6	25.7	20.1	25.0	27.8
> 13 m	0.0	0.0	2.1	0.7	2.1	13.2	7.6	0.0
<i>A. tataricum</i>								
8–13 m	1.4	1.4	0.0	2.1	2.1	0.7	2.8	0.0
<i>C. mas</i>								
8–13 m	1.4	1.4	0.7	4.2	1.4	3.5	2.8	5.6

*mean frequencies of new plots

Frequency distribution of *A. campestre* and *C. mas* woody species between 1993 and 2012 with height and diameter classes is shown in Figure 2. Most stems belonged to the 8.0–10.0 m height and 11.6–16.6 cm diameter classes, which contained almost 75% and 55% of these woody species. The height and diameter frequency distribution of subcanopy species had a corresponding two-peak-pattern in 2012 with a first peak at 901–1000 cm height and 11.6–16.6 cm diameter and a second at 800–900 cm and 8.1–11.5 cm class.

Table 2. Results of one-way ANOVA and Tukey's HSD test (p = significance level, F = variance of the group means) for mean basal area, occurrence frequencies and mean cover of dominant woody species on the monitoring plot. Significant differences are shown in bold

	p / F values		
	<i>A. campestre</i>	<i>A. tataricum</i>	<i>C. mas</i>
Mean basal area			
<i>A. campestre</i>	1	–	–
<i>A. tataricum</i>	0.0204 / 7.1560	1	–
<i>C. mas</i>	0.0648 / 4.1370	0.3451 / 0.9664	1
Occurrence frequencies			
<i>A. campestre</i>	1	–	–
<i>A. tataricum</i>	0.0006 / 22.650	1	–
<i>C. mas</i>	0.0008 / 20.450	0.2730 / 1.3210	1
Mean cover			
<i>A. campestre</i>	1	–	–
<i>A. tataricum</i>	0.8827 / 0.0230	1	–
<i>C. mas</i>	0.3033 / 1.1780	0.4737 / 0.5547	1

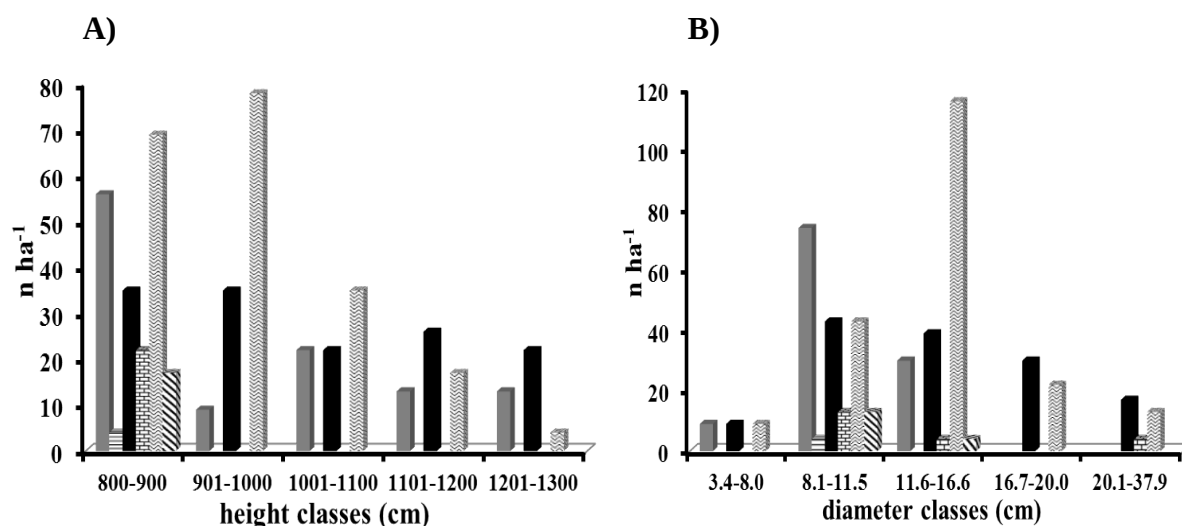


Figure 2. Frequency distribution of *A. campestre* and *C. mas* woody species in 1993, 2007 and 2012 considering height (A) and diameter (B) classes on the monitoring plot. Notation: dark gray - *A. campestre*, 1993; black - *A. campestre*, 2007; wavy - *A. campestre*, 2012; ruled - *C. mas*, 1993; brick - *C. mas*, 2007; slant line - *C. mas*, 2012 ($N = 499$)

Three woody species responded positively to foliage gaps. Box-plots showed the height and diameter changes and distribution of subcanopy species over the period 1982–2012. The median values of *A. campestre* increased considerably, but the minimum and maximum values of height decreased in the last measuring. The *A. tataricum* and *C. mas* boxes did not show unambiguous tendency in height and diameter distribution, but the height decreased considerably between 1982 and 1997. The correlation analysis recorded that after large-scale oak decline, the mean height and shoot diameter of some woody species had increased remarkably but not significantly during the last surveys (height: *A. campestre* $r = 0.78$; *A. tataricum* $r = 0.28$; $P > 0.05$) (diameter: *A. campestre* $r = 0.79$; *A. tataricum* $r = 0.82$; *C. mas* $r = 0.67$; $P > 0.05$). A highly significant relationship between oak tree density and mean height of *C. mas* ($r = 0.99$, $P \leq 0.001$) was confirmed (Figure 4).

Stand density and mean and total basal area of subcanopy species were found to have a negative and non-significant relationship ($r = 0.43\text{--}0.65$, $P > 0.05$). The basal area estimates by woody species show that the total basal area of subcanopy layer varied between 0.33 and 2.75 m². The mean basal area of woody species increased continually from 1982 and varied between 0.24⁻² and 1.84⁻² m² on the monitoring plot. The total basal area of woody species increased after the commencement of oak decline and the greatest values were recorded by maple species in 2012 and by *C. mas* in 2007 (Table 4). The ANOVA analysis indicated significant differences among the mean shoot's basal area of maple species (Table 2).

We found a negative correlation between top canopy density and total foliage cover of the subcanopy layer ($r = 0.95$, $P \leq 0.05$). The GIS analysis confirmed that after serious oak death the percentage cover of subcanopy layer increased considerably and was at its maximum in 1997 with 969.9 m². Mean cover increment of *A. campestre* negatively correlated to oak tree density ($r = 0.85$, $P \leq 0.05$). Mean cover of *C. mas* ($r = 0.71$, $P > 0.05$) and *A. tataricum* ($r = 0.54$, $P > 0.05$) specimens increased, but non-significantly after tree decline. This value increased continually with European cornel individuals, but the mean cover of maple species fluctuated between 11.2 and 18.3 m² between 1993 and 2007 (Table 3). The ANOVA indicated non-significant differences among mean cover of woody species (Table 2).

Table 3. Relationship between oak tree density and mean cover of subcanopy woody species and total foliage cover of subcanopy layer on the monitoring plot over the period 1982–2007

year	oak tree density (n ha ⁻¹)	mean cover (m ²) $\pm$ SD.			total foliage cover of subcanopy layer (m ²)
		<i>A. campestre</i>	<i>A. tataricum</i>	<i>C. mas</i>	
1982	651	4.8 $\pm$ 1.2	3.4 $\pm$ 0.8	3.6 $\pm$ 0.9	81.2
1988	408	7.8 $\pm$ 8.8	4.5 $\pm$ 4.0	8.5 $\pm$ 7.0	150.0
1993	372	11.7 $\pm$ 3.4	–	10.4 $\pm$ 0.0*	313.8
1997	304	18.3 $\pm$ 6.1	11.2 $\pm$ 1.6	19.0 $\pm$ 2.2	969.9
2002	324	12.0 $\pm$ 2.9	18.2 $\pm$ 0.0*	27.0 $\pm$ 1.9	612.4
2007	323	14.6 $\pm$ 2.8	31.7 $\pm$ 0.0*	34.8 $\pm$ 6.0	671.6

*on the basis of a single individual

Table 4. Relationship between oak tree density and mean and total basal area of subcanopy woody species on the monitoring plot over the period 1982–2012

year	oak tree density (n ha ⁻¹)	mean basal area (m ²) $\pm$ SD. / total basal area (m ²)		
		<i>A. campestre</i>	<i>A. tataricum</i>	<i>C. mas</i>
1982	651	4.8 ⁻³ $\pm$ 1.9 ⁻³ / 0.07	2.5 ⁻³ $\pm$ 6.0 ⁻⁴ / 4.9 ⁻³	2.4 ⁻³ $\pm$ 8.8 ⁻⁴ / 4.8 ⁻³
1988	408	5.2 ⁻³ $\pm$ 2.0 ⁻³ / 0.11	2.3 ⁻³ $\pm$ 1.1 ⁻³ / 6.1 ⁻³	3.8 ⁻³ $\pm$ 1.7 ⁻³ / 4.1 ⁻³
1993	372	5.9 ⁻³ $\pm$ 2.2 ⁻³ / 0.15	–	4.1 ⁻³ $\pm$ 0.0 / 4.1 ⁻³ *
1997	304	8.8 ⁻³ $\pm$ 4.0 ⁻³ / 0.40	3.8 ⁻³ $\pm$ 5.6 ⁻⁴ / 1.1 ⁻²	4.5 ⁻³ $\pm$ 2.6 ⁻³ / 2.7 ⁻²
2002	324	1.3 ⁻² $\pm$ 1.2 ⁻² / 0.60	5.6 ⁻³ $\pm$ 3.0 ⁻³ / 1.7 ⁻²	5.1 ⁻³ $\pm$ 2.1 ⁻³ / 1.5 ⁻²
2007	323	1.2 ⁻² $\pm$ 7.6 ⁻³ / 0.39	6.1 ⁻³ $\pm$ 0.0 / 6.1 ⁻³ *	1.0 ⁻² $\pm$ 8.7 ⁻³ / 5.1 ⁻²
2012	305	1.8 ⁻² $\pm$ 1.8 ⁻² / 0.87	7.6 ⁻³ $\pm$ 5.2 ⁻³ / 3.1 ⁻²	7.4 ⁻³ $\pm$ 2.3 ⁻³ / 3.0 ⁻²

*on the basis of a single individual

4 DISCUSSION

Three types of factors should be examined as possible causes of the shrub layer dynamics observed: (1) Changes in the light and thermal regime resulting from changes in canopy structure, particularly gaps; (2) changes in the species composition and density of canopy trees; and (3) other environmental factors such as changes in forest management or human activities. The last factor can be excluded, because the forest community has not been disturbed by forest management for more than 50 years. The second possible factor is only partially relevant to the study site; a significant proportion of sessile oak trunks ($P \leq 0.01$) died on the site and the percentage foliage cover of the tree layer decreased. Despite this ecological process new and/or invasive species could not establish themselves in the oak forest, because some native species of the understory would respond positively to various sizes of canopy gaps. So our study is in agreement with Dunn (1986) who found that the species composition of the shrub layer to density of dead *Ulmus americana* L. trees was not significant in lowland forests of the USA.

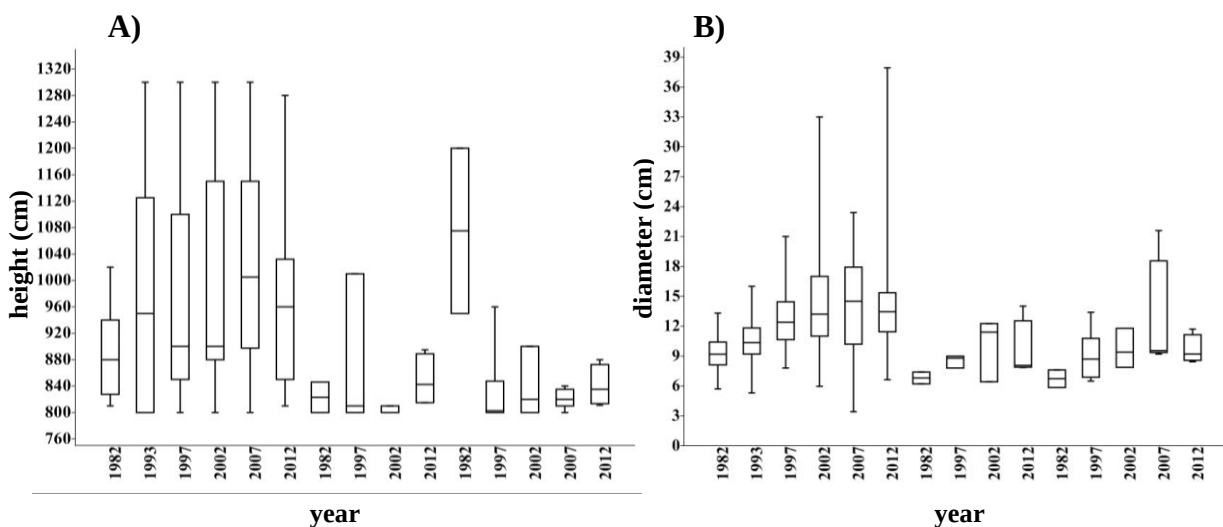


Figure 3. Statistical summary of height (A) and diameter (B) changes of subcanopy woody species (sequentially: *A. campestre*, *A. tataricum* and *C. mas*) on the monitoring plot over the period 1982–2012. Boxes shown are the 25–75% percentile, median, minimum and maximum values ($N = 250$). Includes only single individual of *A. tataricum* in 2007 and *C. mas* in 1993

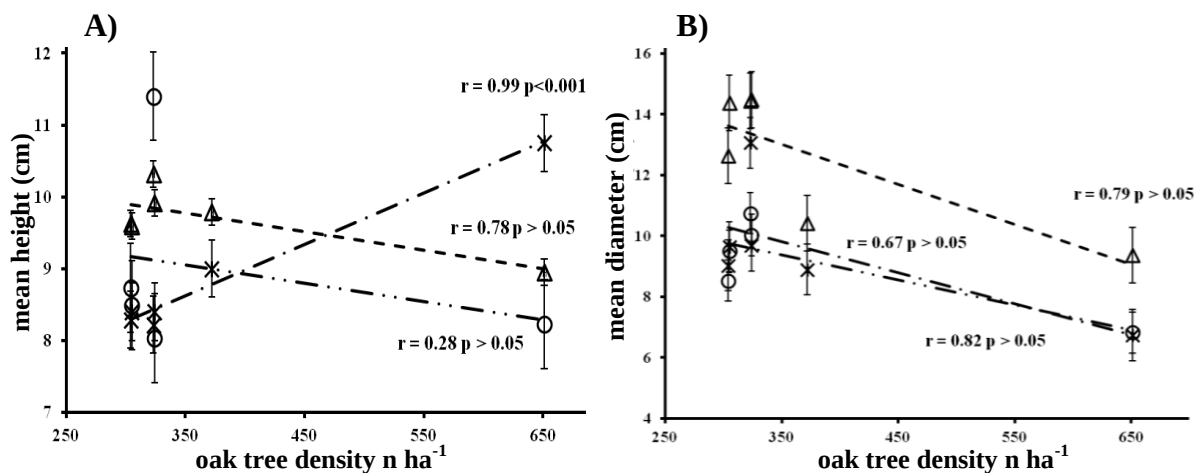


Figure 4. Correlation relationship between oak tree density and average height (A) and diameter (B) $\pm$ SE. changes of subcanopy woody species on the monitoring plot over the period 1982–2012 ($N = 250$).

Notation: ---, triangle – *A. campestre*; ···, circle – *A. tataricum*; – · –, asterisk – *C. mas*

A significant association was not detected between oak canopy density and the density of the subcanopy layer ($P > 0.05$) on the site (Figure 1). A non-significant increase in the density of *A. campestre* in the new layer and in the overstory after the oak decline ($P > 0.05$) was recorded, because increasing numbers of *A. campestre* grew out from the subcanopy layer from 1993. This process is coincident with the height increment of the maple specimens (Figure 4). The species occurrence frequencies in the subcanopy layer did not change significantly over the past 3 decades. In the USA the total shrub density showed a relationship to dead elm density. The density of shrub layer increased significantly and predictably, when dead elm density was greater than 5 stems/ha (Dunn 1986). Observations from mature *Quercus*-dominated forests throughout the eastern United States suggest that many of these forests are undergoing significant compositional transformation. *Quercus* spp. are being replaced in the understory by species such as *Acer rubrum* L. and *A. saccharum* Marshall, and these mesophytic, relatively shade-tolerant species are likely to become canopy dominants if current trends continue (Shotola et al. 1992, Galbraith – Martin 2005, Nowacki – Abrams 2008). On the other hand, according to Röhrig and Ulrich (1991) *A. campestre* is a relatively drought tolerant species. Oak species cannot successfully compete with these species (McDonald et al. 2002, Zaczek et al. 2002). Our results support these statements, because in Síkfőkút maple specimens showed an increase in size and cover, and a low regeneration potential of oaks due to drought and detected shading effects (Figure 3, 4, Table 3, 4). A considerable shifting to the larger height and diameter classes in the subcanopy layer under 15 years has been noted from the monitoring (Figure 2). In the canopy gaps these species grew up from the shrub layer into the new foliage layer 8.0–13.0 m in height, below the canopy layer of the sessile oak and Turkey oak species. High drought tolerance of *A. campestre* confirms the results of Kotroczó et al. (2012) in Síkfőkút. The mean leaf-litter production of this species was nearly 110.0 kg ha⁻¹ between 1972–76 and was five times higher between 2003–10, these differences are significant ($P = 0.001$). This can be explained by the fact that *A. campestre* formerly occurred in the shrub layer, while presently it forms a part of the canopy-layer, where it has become the second most common tree species, representing 28.2% of the total number of trees in the canopy.

We found a negative correlation between oak tree density and total cover of the subcanopy layer ($P \leq 0.05$). A similar connection between top canopy density and mean cover of the species in the subcanopy was detected (Table 3). In 2002 we found an important recidivation in total cover of the subcanopy layer, but the individual density of this layer increased further. The reason being that the mean cover of *A. campestre* individuals decreased by 26.0% compared to 1997. Results from different forest types show that the canopy openings modify light, thermal and moisture conditions (Nakashizuka 1985, Holeksa 2003). After large-scale oak decline, different sized gaps were formed in the foliage of the tree layer in the sample site and the shrub species in these gaps could be increased considerably due to the higher light levels. Concerning trees cover its purported influence on the composition of understory species by through it controlling ecosystem processes such as light transmittance and nutrient cycling (Légaré et al. 2001); we cannot support such a statement with our results. The decreasing total top canopy cover led to changes in the structural condition of the shrub layer, but consistent and directional changes in the shrub species composition has not been reported. The dense tree layer can inhibit regeneration of trees and high shrubs (Tappeiner et al. 1991, Stein 1995, Knowe et al. 1997). At our site, oak decline decreased top canopy cover and led to the notable height growth of three species from the shrub layer; this phenomenon is called the "Oskar"-strategy (Silvertown 1982). The *Acer* species is a genus that displays this characteristic in such circumstances. The results, from a mixed forest stand in France, of Caquet et al. (2010) suggest that the new trees in the gaps at the end of the regeneration phase were dominated by *Fagus sylvatica* L. and *Acer pseudoplatanus* L. Two other species,

A. campestre and *Acer platanoides* L., are present in high numbers in the seedling bank, but are totally absent at the end of the regeneration phase in the gaps. 3 years later canopy opening seedlings in the gaps displayed significantly greater diameter and height than those under canopy in *Acer* sp. and *F. sylvatica* L. species ($P < 0.001$). All maple and European beech species responded positively and rapidly to canopy openings. Diameter increment was similar across four species, and height increment was greater for *A. platanoides* and for *A. pseudoplatanus* seedlings (Caquet 2010).

Tree decline substantially increases the resources (e.g. light and nutrients) available to other organisms (naturally to shrub species) in the ecosystem. The amount of resources made available depends on the scale of the oak decline (Franklin et al. 1987). At our site 493 specimens of oak trunks died in the last decades so initially this process guaranteed suitable light for the growing of shrub specimens. In the gaps some woody species (especially *A. campestre*) grew quickly, therefore they were the limiting factor for the natural regeneration and growing of other shrub and oak species by restricting the light supply in the forest. Dense cover of two *Acer* sp. and *C. mas* can inhibit regeneration of other trees and shrubs in our site. *Acer* species are considered very important among the hardwoods of Europe and North America, because of their ecological and economic significance (Morselli 1989). These species provide a considerable source of food and foliage cover for wildlife (Morselli 1989).

5 CONCLUSIONS

Our study suggests that (1) the vertical foliage distribution changed in the understory and a new secondary subcanopy layer appeared below the oak canopy layer, 8–13 m in height. (2) *A. campestre* was the most common shade-tolerant woody species in this new layer. Additionally, some *C. mas* and *A. tataricum* specimens composed the subcanopy layer. (3) The response of these shade and relatively drought tolerant woody species is strong and rapid once oak decline has set in, the so-called "Oskar"-strategy. (4) The total foliage cover of this layer per hectare was substantially higher in 2012 than in 1982; the new layer can make up for the significant losses of leaf canopy. (5) *A. campestre* has a strong influence on the frequencies of other subcanopy species and on the mean basal area of *A. tataricum*. The study demonstrated that the forest community compensated for the dead oak trees by forming a subcanopy layer. The woody species of this layer responded successfully to the foliage gaps. Archival data from 1982 allowed us to quantify long-term changes in forest structure and to better understand the impacts of a changing top canopy density and foliage cover rate over the past 30 years. Furthermore, understanding understory development and possible interaction between the understory shrub layer and the canopy is critical to achieving forest management goals in the Hungarian oak forest stands, as this knowledge helps explain stand developmental patterns and predict future stand structures. As the decline in the current oak population continues, and with oak seedlings taking so long to reach sufficient height, more *A. campestre* specimens will grow into the canopy which will lead to the formation of mixed oak forest.

Acknowledgements: The authors were supported during the manuscript preparation by the TÁMOP 4.2.1./B-09/1/KONV-2010-0007 project. We would like to thank our colleagues at the University of Debrecen, Department of Ecology-Debrecen and Eszterházy Károly College, Department of Environmental Science, Eger for help with our field-work until 2002.

REFERENCES

- AUGUSTO, L. – DUPOUEY, J.L. – RANGER, J. (2003): Effects of tree species on understory vegetation and environmental conditions in temperate forests. *Ann For Sci* 60: 823–831.
- BÉRES, CS. – FENYVESI, A. – RASCHI, A. – RIDDER, H.W. (1998): Field experiment on water transport of oak trees measured by computer tomograph and magnetic resonance imaging. *Chemosphere* 36: 925–930.
- BOLTE, A. – HILBRIG, L. – GRUNDMANN, B. – KAMPF, F. – BRUNET, J. – ROLOFF, A. (2010): Climate change impacts on stand structure and competitive interactions in a southern Swedish spruce–beech forest. *Eur J For Res* 129: 261–276.
- BROSOFSKE, K.D. – CHEN, J. – CROW, T.R. (2001): Understory vegetation and site factors: implications for a managed Wisconsin landscape. *For Ecol Manag* 146: 75–87.
- BROWN, L.B. – ALLEN-DIAZ, B. (2009): Forest stand dynamics and sudden oak death: Mortality in mixed-evergreen forests dominated by coast live oak. *For Ecol Manag* 257: 1271–1280.
- BRUCK, R.I. – ROBARGE, W.P. (1988): Change in forest structure in the boreal montane ecosystem of Mount Mitchell, North Carolina. *Eur J For Pathol* 18: 357–366.
- BRUHN, J.N. – WETTEROFF, JR. J.J. – MIHAIL, J.D. – KABRICK, J.M. – PICKENS, J.B. (2000): Distribution of *Armillaria* species in upland Ozark Mountain forests with respect to site, overstory species composition and oak decline. *Eur J For Pathol* 30: 43–60.
- BUSSOTTI, F. – FERRETTI, M. (1998): Air pollution, forest condition and forest decline in Southern Europe: an overview. *Environ Pollut* 101: 49–65.
- CAQUET, B. – MONTPIED, P. – DREYER, E. – EPRON, D. – COLLET, C. (2010): Response to canopy opening does not act as a filter to *Fagus sylvatica* and *Acer* sp. advance regeneration in a mixed temperate forest. *Ann For Sci* 67: 105–115.
- CSÓKA, GY. (1998): Oak defoliating insects in Hungary. In: McManus M.L. – Liebhold, A.M. (eds.): *Proceedings: Population Dynamics, Impacts, and Integrated Management of Forest Defoliating Insects*. USDA Forest Service General Technical Report NE-247. 334–335.
- DE VRIES, W. – REINDS, G.J. – POSH, M. – SANZ, M.J. – KRAUSE, G. – CALATAYUD, V. – RENAUD, J.P. – DUPOUCY, H. ET AL. (2003): Intensive monitoring of forest ecosystems in Europe, 2003. Technical Report, EC-UN/ECE, Brussels. Geneva.
- DUNN, C.P. (1986): Shrub layer response to death of *Ulmus americana* in southeastern Wisconsin lowland forest. *Bull Torrey Bot Club* 113: 142–148.
- FRANKLIN, J.F. – SHUGART, H.H. – HARMON, E.M. (1987): Tree death as an ecological process. The causes, consequences, and variability of tree mortality. *BioSci* 37 550–556.
- FREER-SMITH, P.H. – READ, D.B. (1995): The relationship between crown condition and soil solution chemistry in oak and Sitka spruce in England and Wales. *For Ecol Manag* 79: 185–196.
- GALBRAITH, S.L. – MARTIN, W.H. (2005): Three decades of overstory and species change in a mixed mesophytic forest in eastern Kentucky. *Casta* 70: 115–128.
- GAZOL, A. – IBÁÑEZ, R. (2009): Different response to environmental factors and spatial variables of two attributes (cover and diversity) of the understorey layers. *For Ecol Manag* 258: 1267–1274.
- GOLDBLUM, D. (1997): The effects of treefall gaps on understory vegetation in New York State. *J Veg Sci* 8: 125–132.
- GRACIA, M. – MONTANÉ, F. – PIQUÉ, J. – RETANA, J. (2007): Overstory structure and topographic gradients determining diversity and abundance of understory shrub species in temperate forests in central Pyrenees (NE Spain). *For Ecol Manag* 242: 391–397.
- HÄMMERLI, F. – STADLER, B. (1989): Eichenschäden - Eine Übersicht zur Situation in Europa und in der Schweiz. *Schweiz Z Forstwes* 140: 357–374.
- HOLEKSA, J. (2003): Relationship between field-layer vegetation and canopy openings in a Carpathian subalpine spruce forest. *Plant Ecol* 168: 57–67.
- HUGHES, J.W. – FAHEY, T.J. (1991): Colonization dynamics of herbs and shrubs in a disturbed northern hardwood forest. *J Ecol* 79: 605–616.
- HUTCHINSON, T.F. – BOERNER, R.A.J. – IVERSON, L.R. – SUTHERLAND, S. – KENNEDY, S.E. (1999): Landscape patterns of understory composition and richness across a moisture and nitrogen mineralization gradient in Ohio (USA) *Quercus* forests. *Plant Ecol* 144: 177–189.

- IGMÁNDY, Z. (1987): Die Welkeepidemie von *Quercus petraea* (Matt.) Lieb. in Ungarn (1978 bis 1986). Österr Forstz 98: 48–50.
- JAKUCS, P. (ed.) (1985): Ecology of an oak forest in Hungary. Results of „Síkfőkút Project” I. Akadémia Kiadó, Budapest.
- JAKUCS, P. (1988): Ecological approach to forest decline in Hungary. Ambio 17: 267–274.
- JUNG, T. – BLASCHKE, H. – OBWALD, W. (2000): Involvement of soilborne *Phytophthora* species in Central European oak decline and the effect of site factors on the disease. Plant Pathol 49: 706–718.
- KABRICK, J.M. – DEY, D.C. – JENSEN, R.G. – WALLENDORF, M. (2008): The role of environmental factors in oak decline and mortality in the Ozark Highlands. For Ecol Manag 255: 1409–1417.
- KERNS, B.K. – OHMANN, J.L. (2004): Evaluation and prediction of shrub cover in coastal Oregon forests (USA). Ecol Indic 4: 83–98.
- KLEIN, R.M. – PERKINS, T.D. (1987): Cascades of causes and effects of forest decline. Ambio 16: 86–93.
- KNOWE, S.A. – STEIN, W.I. – SHAINSKY, L.J. (1997): Predicting growth response of shrubs to clear-cutting and site preparation in coastal Oregon forests. Can J For Res 27: 217–226.
- KOTROCZÓ, ZS. – KRAKOMPERGER, ZS. – KONCZ, G. – PAPP, M. – BOWDEN, R.D. – TÓTH, J.A. (2007): A Síkfőkúti cseres-tölgyes fafaj összetételének és struktúrájának hosszú-távú változása. [Long term changes in the composition and structure of an oak forest at Síkfőkút, North Hungary] Természetvédelmi Közlemények 13: 93–100. (in Hungarian)
- KOTROCZÓ, ZS. – VERES, ZS. – FEKETE, I. – PAPP, M. – TÓTH, J.A. (2012): Effects of climate change on litter production in a *Quercetum petraeae-cerris* forest in Hungary. Acta Silv Lign Hung 8: 31–38.
- LÉGARÉ, S. – BERGERON, Y. – LEDUC, A. – PARÉ, D. (2001): Comparison of the understory vegetation in boreal forest types of southwest Quebec. Can J Bot 79: 1019–1027.
- LÉGARÉ, S. – BERGERON, Y. – PARÉ, D. (2002): Influence of forest composition on understory cover of boreal mixedwood forests of western Quebec. Silva Fenn 36: 353–366.
- MCDONALD, R.I. – PEET, R.K. – URBAN, D.L. (2002): Environmental correlates of oak decline and red maple increase in the North Carolina Piedmont. Castanea 67: 84–95.
- MCKENZIE, D. – HALPERN, C.B. – NELSON, C.R. (2000): Overstory influences on herb and shrub communities in mature forests of western Washington USA. Can J For Res 30: 1655–1666.
- MÉSZÁROS, I. – MÓDY, I. – MARSCHALL, I. (1993): Effects of air pollution on the condition of sessile oak forests in Hungary. Stud Environ Sci 55: 23–33.
- MÉSZÁROS, I. – KANALAS, P. – FENYVESI, A. – KIS, J. – NYITRAI, B. – SZÖLLŐSI, E. – OLÁH, V. – DEMETER, Z. – LAKATOS, Á. – ANDER, I. (2011): Diurnal and seasonal changes in stem radius increment and sap flow density indicate different responses of two co-existing oak species to drought stress. Acta Silv Lign Hung 7: 97–108.
- MORAAL, L.G. – HILSZCZANSKI, J. (2000): The oak buprestid beetle, *Agrilus biguttatus* (F.) (Col., Buprestidae), a recent factor in oak decline in Europe. J Pest Sci 73: 134–138.
- MORSELLI, M.F. (1989): Maple (*Acer* spp.). In: Bajaj, Y.P.S. (ed.): Biotechnology in Agriculture and Forestry Vol. 5. Trees II.
- NAKASHIZUKA, T. (1985): Diffused light conditions in canopy gaps in a beech (*Fagus crenata*) forest. Oecol 66: 472–474.
- NOWACKI, J.G. – ABRAMS, D.M. (2008): The demise of fire and “mesophication” of forests in the Eastern United States. Biosci 58: 123–138.
- OLIVER, C.D. – LARSON, B.C. (1996): Forest stand dynamics. Wiley, New York. 520 p.
- RÖHRIG, E. – ULRICH, B. (1991): Ecosystems of the world 7: Temperate deciduous forests. Elsevier, London. 402 p.
- SHOTOLA, S.J. – WEAVER, G.T. – ROBERTSON, P.A. – ASHBY, W.C. (1992): Sugar maple invasion of an old-growth oak–hickory forest in southwestern Illinois. Am Midl Nat 127: 125–138.
- SIGNELL, S.A. – ABRAMS, M.D. – HOVIS, J.C. – HENRY, S.W. (2005): Impact of multiple fires on stand structure and tree regeneration in central Appalachian oak forests. For Ecol Manag 218: 146–158.
- SILVERTOWN, J.W. (1982): Introduction to plant population ecology. Blackwell Scientific, Oxford. UK.
- STALTER, A.M. – KRASNY, M.E. – FAHEY, T.J. (1997): Sprouting and layering of *Acer pensylvanicum* L. in hardwood forests of central New York. J Torrey Bot Soc 124: 246–253.
- STEIN, W.I. (1995): Ten-year development of douglas-fir and associated vegetation after different site preparation on Coast Range Clearcuts. PNW-RP-473, USDA Forest Service, Portland. OR.

- STONE, W.E. – WOLFE, M.L. (1996): Response of understory vegetation to variable tree mortality following mountain beetle epidemic in lodgepole pine stands in northern Utah. *Veg* 122: 1–12.
- SZABÓ, I. – VARGA, SZ. – BERÉNYI, A. – VIDÓCZI, H. (2007): *Cryphonectria parasitica* in sessile oak in Hungary. *Acta Silv Lign Hung Spec Edition*: 187–197.
- TAPPEINER, J.C. – ZASADA, J. – RYAN, P. – NEWTON, M. (1991): Salmonberry clonal and population structure: the basis for a persistent cover. *Ecol* 72: 609–618.
- THOMAS, F.M. – BÜTTNER, G. (1998): Nutrient relations in healthy and damaged stands of mature oaks on clayey soils: two case studies in northwestern Germany. *For Ecol Manag* 108: 301–319.
- WOODALL, C.W. – GRAMBSCH, P.L. – THOMAS, W. – MOSER, W.K. (2005): Survival analysis for a large-scale forest health issue: Missouri oak decline. *Environ Monit Assess* 108: 295–307.
- ZACZEK, J.J. – GRONINGER, J.W. – VAN SAMBEEK, J.W. (2002): Stand dynamics in an old-growth hardwood forest in Southern Illinois, USA. *Nat Areas J* 22: 211–219.

Genetic Studies of Selected „Black-Fruit” Hawthorns: *Crataegus nigra* WALDST. et KIT., *C. pentagyna* WALDST. et KIT. and *C. chlorosarca* MAXIM.

Viktor KERÉNYI-NAGY^{ab*} – Tamás DEÁK^c – Géza KÓSA^d – Dénes BARTHA^b

^a Institute of Horticulture and Technology, Szent István University, Gödöllő, Hungary

^b Institute of Botany and Nature Protection, University of West-Hungary, Sopron, Hungary

^c Institute of Viticulture and Oenology, Corvinus University, Budapest, Hungary

^d Centre for Ecological Research, Institute of Ecology and Botany, National Botanical Garden, Vácrátót, Hungary

Abstract – Genetic relationships of black-fruit hawthorns of the Carpathian basin have been investigated based on intergenic cpDNA sequences; first of all of the endemic *Crataegus nigra* and related species. Considerable infraspecific variation was detected in the East Asian taxon *C. chlorosarca* and some divergence in the Eurasian *C. pentagyna*. Based on the genetic analysis of investigated and reference psbA-trnH sequences, classification of sections *Crataegus* and *Sanguineae* is highly supported. From the studied taxa, *C. pentagyna* and *C. monogyna* was ordered to Sectio *Crataegus*, while *C. nigra* and *C. chlorosarca* to Sectio *Sanguineae*. Based on our data, *C. nigra* can be considered as maternal parent of the investigated *C. × degenii* hybrids.

molecular taxonomy / classification / intergenic cpDNA sequences

Kivonat – Három kiválasztott „fekete termésű” galagonyafaj genetikai vizsgálata: *Crataegus nigra* WALDST. et KIT., *C. pentagyna* WALDST. et KIT. és *C. chlorosarca* MAXIM. Jelen tanulmányban kárpát-medencei „fekete termésű” galagonyák, elsősorban a *Crataegus nigra* és közeli rokonainak genetikai kapcsolatait vizsgáltuk intergénikus cpDNS szekvenciák alapján. Jelentős infraspecifikus variabilitást a kelet-ázsiai *C. chlorosarca* fajnál tapasztaltunk, míg az eurázsiai *C. pentagyna* esetében korlátozott számú nukleotid polimorfizmust azonosítottunk. Az általunk vizsgált és az adatbázis eredetű referencia psbA-trnH szekvenciák alapján a Sect. *Crataegus* és Sect. *Sanguineae* osztályozások támogatást kapnak. A vizsgált taxonok, a *C. pentagyna* és a *C. monogyna* a Sect. *Crataegus*-ba, míg a *C. nigra* és a *C. chlorosarca* a Sect. *Sanguineae* kládokra kerültek besorolásra. Vizsgálataink alapján a *C. nigra* a *C. × degenii* hibrid anyai szülője.

molekuláris taxonómia / osztályozás / intergénikus cpDNS szakaszok

* Corresponding author: kenavi1@gmail.com; H-2100, GÖDÖLLŐ, Práter K. u. 1.

1 INTRODUCTION

The Hungarian (Danubian) hawthorn (*Crataegus nigra* WALDST. et KIT.) is an endemic species of the Carpathian Basin, occurring in the floodplains of Danube in Hungary and across the Serbian-Croatian border (for recent changes in the area see (BARTHA – KERÉNYI-NAGY, 2010). It is a mesophytic species: grows in the floodplain-forests (*Salici-Populetum nigrae* PARABUĆSKI, *Fraxino pannonicae-Ulmetum* SOÓ, *Leucojo aestivi-Crataegetum nigrae* KEVEY, FERENC et TÓTH). Morphologically, it can be identified easily, the taxon differs strongly from other taxa: it has 7–9–11–13 leaf lobes, the leaves on the upper surface are villose and the lower surface is downy, the stipules are serrate, the fruit is black with 5 seeds. *C. nigra* has 8 forms and 1 hybrid with *C. monogyna* JACQ., this hybrid, *C. × degenii* ZSÁK is also endemic in the Carpathian Basin (BARTHA – KERÉNYI-NAGY, 2010). The Degenhawthorn and its relationship to other native Hungarian hawthorn taxa were not yet studied by genetic methods. This is the first attempt to analyse the proposed origin of *C. × degenii* (syn. *C. × lambertiana* LANGE) genetically.

The more xerophytic species *C. chlorosarca* MAXIM. in the Far East is vicariant of *C. nigra*. Both species belong to Sectio *Sanguineae* ZABEL ex C. K. SCHNEID. Series *Nigrae* (LOUDON) RUSSANOV. *C. chlorosarca* is morphologically similar to *C. nigra*. It differs however from *C. nigra* with its black-purple fruit and the sepal edges have some teeth (CINOVSKIS, 1971). Genetic relation of *C. nigra* and *C. chlorosarca* has been proved earlier by LO et al (2009). The same study has shown, that East Asian and European taxa show clear divergence based on combined nuclear and chloroplast DNA data with only few exceptions – including *C. nigra*.

Small-flowered black hawthorn (*C. pentagyna* WALDST. et KIT.) has been described from the Carpathian Basin as well, but its distribution area ranges from the southern part of Banat, onto the Balkan Peninsula and to Asia Minor. It differs from *C. nigra* in morphology (3–5 leaf lobes, the leaves are leathery, the upper surface is bright and glabrous, sometimes pubescent too; the lower surface is often lanate-tomentose only in the vein-axils, the stipule is entire, the fruit is black with 5 seeds) (BARTHA – KERÉNYI-NAGY, 2010, Table 1.) and belongs to Sectio *Crataegus*. *C. pentagyna* is ordered to the outer basal position of Sectio *Crataegus* (LO et al., 2009). Although *C. pentagyna* and *C. nigra* show different morphological and ecological characteristics, reviewing herbarium specimens reveals that they are confused frequently in the literature.

Based on our earlier morphological studies (BARTHA – KERÉNYI-NAGY, 2010), we would like to answer the following questions with molecular markers: (1) is there any infraspecific divergence in cpDNA sequences of black-fruit hawthorns; (2) is the genetic relatedness of *C. nigra* and *C. chlorosarca*, and the classification of these taxa into the same section supported despite the geographic distance between the distribution areas; (3) are *C. pentagyna* and *C. nigra* different on the genetic level; and (4) whether the parent species of *C. × degenii* (*C. nigra* and *C. monogyna*) were identified correctly.

2 MATERIALS AND METHODS

2.1 Plant samples

We collected the samples in Hungary from natural habitats (4 samples of *C. nigra*: Szigetújfalu, 5K, compartment 6AB; 2 samples of *C. × degenii*: Szigetújfalu, the road between the compartments 4A–5B; 2 samples of *C. monogyna*: Szigetújfalu, the border of 5K–6AB compartments) or from the live collection of the Institute of Botany of the Hungarian Academy of Sciences, Vácrátót; the origin of the sampled shrubs were Vladivostok (Russia) for *C. chlorosarca* (4 samples) and Bucarest (Romania) for *C. pentagyna* (6 samples).

It should be noted, that *C. × degenii* and *C. nigra* samples originated physically from the same population, where *C. nigra* was dominant with ~99% frequency.

Table 1. Differential morphological characters between the hawthorn taxa included in the current study

Character	<i>C. chlorosarca</i>	<i>C. nigra</i>	<i>C. × degenii</i>	<i>C. monogyna</i>	<i>C. pentagyna</i>
Branch	rambling		rigid, straight		
Shoot-hair	permanently downy		soarsely downy and balding	hairless	rare, small hairy
Bracteas	dentated		less dentated	integral	
Leaves shape	triangular	deltoid			
Number of lobes	7–11		5–7–9	3–5	
Fragmentation of leaves	poor		deep		
Upper surface of leaves	hairy		±hairless	hairless	rare hairy
Lower surface of leaves	downy				full of very small and rare hair
Hairs between the veins	even			non	tuft
Basis of leaves	round	straight or wide round	wide round	wedge	wide wedge
Edge of leaves	trough densely dentated		4–6 dentated	integral or 2–3 dentated	4–10 dentated
Sepals	reflexed				erected or V-shaped
Sepal edge	some teeths			integral	
Peduncle	full of hair		±hairless	hairless	rare hairy
Hypanthium	rare hairy				
Fruit-colour	purple-black	black	purple	red	black
Fruit-hair	hairless				±hairless
„Seed” number	5		2–4	1	5
„Seed” position	free				whole or inpart linked with
Habitat	xerothermic	floodplain		xerothermic	

2.2 DNA amplification and sequencing

DNA was extracted from young leaves stored at –20 °C using a modified CTAB method (MSZ EN ISO 21571, 2005) originally introduced by DOYLE and DOYLE (1987). Standard polymerase chain reactions were carried out in 20 µl final volume from ~30 ng template DNA

under following conditions: 2 minutes denaturation at 94 °C was followed by 30 cycles of 30 secs denaturation at 94 °C, 30 secs primer annealing at 56 °C and 1 minute elongation at 72 °C. The reaction was closed by 5 minutes chain elongation at 72 °C.

For amplification of trnL-trnF (5'-AAAATCGTGAGGGTTCAAGTC-3' and 5'-GATTGAACTGGTGACACGAGG-3') and psbA-trnH (5'-GTTATGCATGAACGTAATGCTC-3' and 5'-CGCGCATGGTGGATTACAATCC-3') chloroplast intergenic regions, primers used by ALBAROUKI and PETERSON (2007) for hawthorns taxa were applied. Following 1.2% agarose gel-electrophoresis, single band PCR products were isolated using the Wizard PCR Clean-Up System (Promega) according to the manufacturer's instructions. Eluted PCR products were direct sequenced using traditional Sanger sequencing on the ABI 3100 (Applied Biosystems) platform using both forward and reverse primers such accessing two times coverage.

Manually curated sequences have been uploaded to the European Nucleotide Archive (accession numbers HG937792-HG937796 for psbA-trnH and HG937797-HG937801 for trnL-trnF).

2.3 Sequence and phylogenetic analysis

Reference sequences of taxa belonging to sections *Sanguineae* and *Crataegus* published by ALBAROUKI and PETERSON (2007) and LO et al. (2009) were fetched from GenBank for *C. nigra* (AJ853470.1), *C. wilsonii* SARG. (EF127141.1), *C. rusanovii* CIN. (EU500281.1), *C. sanguinea* PALL. ex BIEB. (EF127143.1), *C. chlorosarca* (EU682698.1), *C. nevadensis* K. I. CHR. (EU500289.1), *C. orientalis* PALL. (EU500290.1), *C. monogyna* JACQ. (AJ853465), *C. laevigata* (POIR.) DC (AJ853468), *C. heldreichii* BOISS. (EU500295.1) and *C. pentagyna* WALDST. et KIT. ex WILLD. (EF127131.1). Multiple alignments of reference and raw sequences were carried out using the ClustalW2 tool (LARKIN et al. 2007). The raw sequences were then manually curated based on the electrophoretograms and the alignment. Completely identical sequences were joined under one sample name. Phylogenetic analysis was carried out with 1.000 bootstrap replicates and the neighbor-joining (NJ) method (SAITOU and NEI, 1987).

3 RESULTS

From the two investigated chloroplast intergenic regions, trnL-trnF was less variable with a total alignment length of 453 bases, only two phylogenetically informative character and 8 further nucleotide substitutions or insertions, which were monotypic to one species. The 6 bp indel identified earlier between positions 99–104 (ALBAROUKI and PETERSON, 2007) remained monotypic for *C. azarolus* L. var. *aronia* L. New polymorphic sites were identified at position 62 of the alignment, where a 1 bp deletion was recognized exclusively in the two *C. × degenii* specimens; and at position 134, where a G/T single nucleotide polymorphism (SNP) was identified, T being monotypic for *C. pentagyna*.

The psbA-trnH intergenic region, although only 298 bases long, proved to be more polymorphic with 3 phylogenetically informative character, 2 monotypic SNP and a hypervariable region. A new T/A SNP was identified at position 259 of the alignment (alignment positions are based on positions published by ALBAROUKI and PETERSON, 2007), where A is monotypic to *C. pentagyna*. Based on the sample set investigated by ALBAROUKI and PETERSON (2007), the authors proposed four indel regions between positions 130 and 190 of the alignment. In our sample set, this region of the alignment proved to be highly variable (*Figure 1*), which makes clear interpretation challenging.

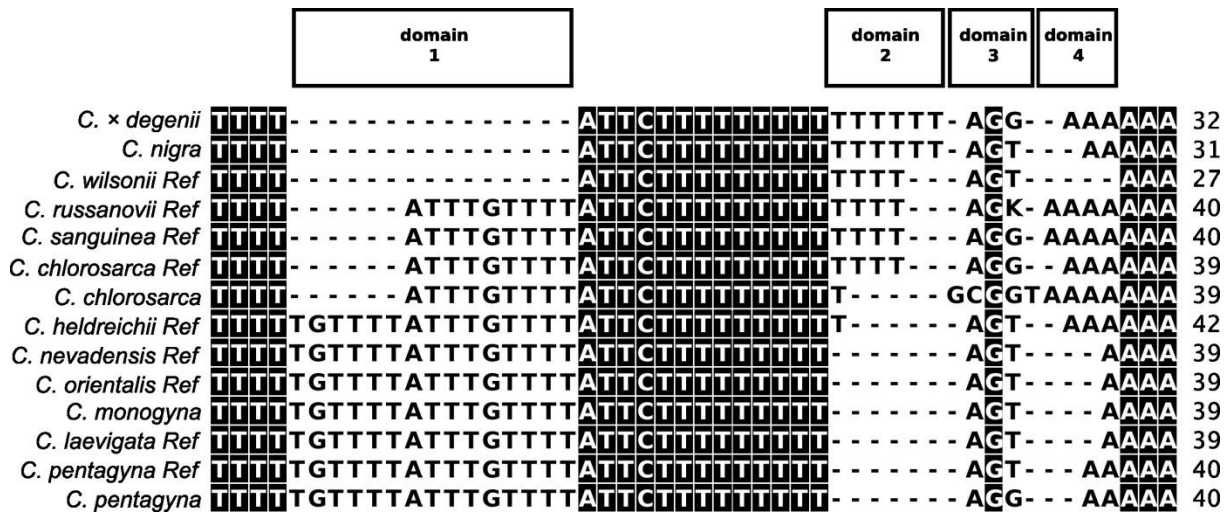


Figure 1. Alignment of the hyper-variable (HV) region of the *psbA-trnH* chloroplast intergenic region. Shaded background denotes conserved positions of the alignment. Boxes above the sequences identify polymorphic domains 1-4 discussed in the text. The HV region starts with position 134 based on the positions published by ALBAROUKI and PETERSON (2007).

First domain of the hyper-variable (HV) is monotypic in section *Crataegus*, while it is variable in *Sanguineae*, showing infraspecific variability in the case of *C. chlorosarca*. This first domain is missing from *C. nigra*, *C. x degenii* and *C. wilsonii* completely.

Second domain of the HV region is a T mononucleotide repeat, which is less informative and in this case the opportunity of sequencing errors is high. We didn't observe any infraspecific variation in this domain.

The third domain has two main characteristics. There is a GCGGT motif monotypic for all investigated *C. chlorosarca*, but not for the reference *C. chlorosarca* samples nor any other taxa. The second motif is a G/T SNP, which seems to be highly variable (data not shown). *C. rusanovii* and *C. dahurica* sequences submitted by LO et al. (2009) having an ambiguous characters at this position, the reference and the investigated Hungarian *C. pentagyna* samples have different states at this position. This is also the one and only of the investigated nucleotide position, where sequences from *C. nigra* and *C. x degenii* samples are differing. Domain four of the HV region is built up from an A mononucleotide repeat. Similar to domain two, it is less informative and error-prone. Because of possible ambiguities, domain two and four, further the G/T SNP motif of domain three were excluded from further analysis.

Intraspecific variation wasn't reported earlier for plastid intergenic sequences of hawthorns except for ambiguous bases in the GenBank entries (domain 3 on Figure 1), while the present study has shown two cases of such variation. Involved *C. pentagyna* specimens didn't differ in the investigated DNA sequences, but they showed the same T/G polymorphism compared to the reference sequences. The only remarkable infraspecific polymorphism was detected in the case of *C. chlorosarca*. In the HV region the *psbA-trnH* alignment *C. chlorosarca* specimens from Vladivostok and the reference sequences are differing on two different domains (domain 1 and 3, Figure 1).

Neighbor-joining tree of the sequenced and reference accessions show a clear distinction between the two included sections: *Crataegus* and *Sanguineae*. In section *Sanguineae* *C. nigra* and *C. x degenii* are located on the same clade, while the sequenced and reference *C. chlorosarca* samples have been ordered to different clades. The clade of section *Crataegus* has a high bootstrap support, but taxa on this clade are not structured any further.

4 DISCUSSION

Based on the neighbor-joining (NJ) tree of the investigated and reference psbA-trnH sequences (Figure 2) classification of sections *Crataegus* and *Sanguineae* is highly supported.

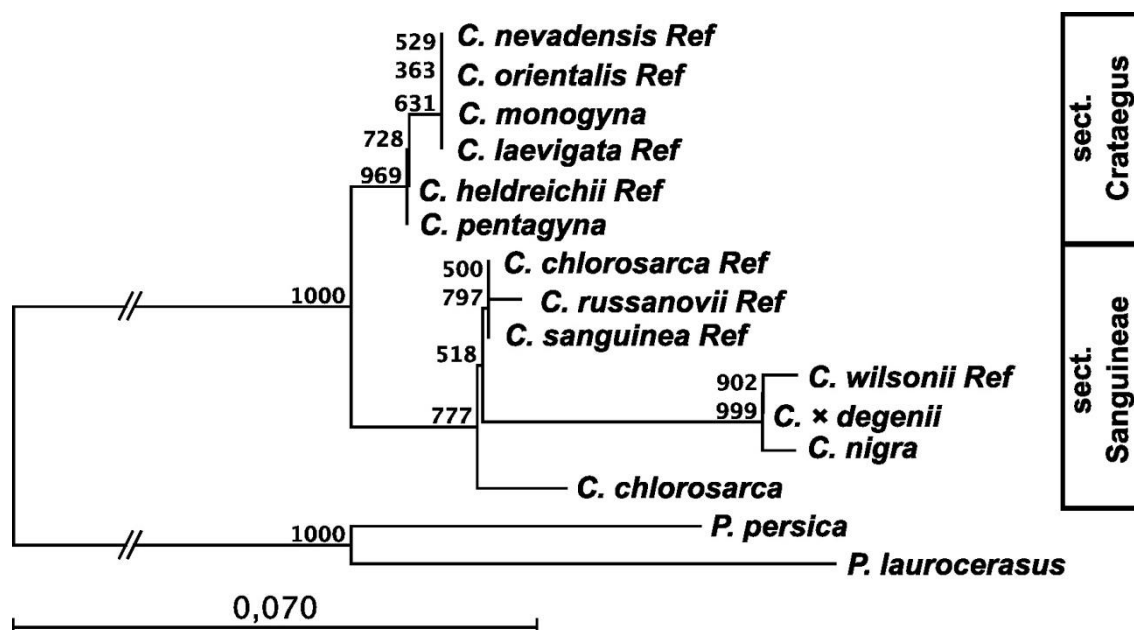


Figure 2. Neighbor joining tree of the psbA-trnH chloroplast intergenic sequences. 'Ref' denotes reference sequences fetched from the GenBank. In the case of *C. nigra*, *C. monogyna* and *C. pentagyna* no differences were found between our results and the reference sequences. *Prunus persica* and *P. laurocerasus* were used as outgroup. Numbers indicate bootstrap support from 1000 replicates.

C. pentagyna is correctly ordered to section *Crataegus*, in accordance to the position proposed by LO et al. (2009). The position of *C. pentagyna* is also supported by PHIPPS et al. (2003), who ordered this taxon in an own Series *Pentagynae* (C.K. SCHNEIDER) RUSSANOV. Our results confirmed the genetic differences between *C. pentagyna* and *C. nigra*. The misidentification of *C. pentagyna* in herbarium specimens can be most probably explained by the simple fact, that both hawthorns have black fruits with five seeds.

C. chlorosarca and *C. nigra* were ordered to the clade of Sectio *Sanguineae*. Intraspecific sequence diversity of *C. chlorosarca* can be detected also on the tree, where the investigated and reference specimens are located on different clades. The sample from Vladivostok analysed in this study shows a more distinct position compared to the *C. chlorosarca* specimen investigated by LO et al. (2009). Diversity of *C. chlorosarca* sequences could be possibly related to taxonomic differences or misidentification of the investigated specimens, such the intraspecific variability of *C. chlorosarca* psbA-trnH intergenic sequences need further confirmation. Although *C. nigra* is endemic to the Carpathian basin, it is ordered to section *Sanguineae* with species of mostly Asian origin. This is supported also by the literature (CHRISTENSEN, 1992; PHIPPS et al., 2003; LO et al., 2009). This genetic pattern – namely the similarities of an endemic from the Carpathian basin and taxa from East Asia – isn't unique. Similar phenomenon can be observed between *Syringa josikaea* JACQ. (LENDVAY et al., 2012), which is endemic in the Carpathian basin and the East Asian taxa of the *Syringa* genus. Sectio *Sanguineae* might have had earlier an Eurasian distribution, which later retreated to Asia. *C. nigra* could be considered as a relic of this former distribution.

Based on our data, *C. nigra* could possibly be the maternal parent of the investigated *C. × degenii* hybrids. The other parent *C. monogyna* could not be proved, as both hybrid samples were of same hybridization direction.

One of the main goals of this study was to clarify, whether genetic relationships of the East Asian *C. chlorosarca*, the Carpathian Basin endemic *C. nigra* and one hybrid taxon of the latter, *C. × degenii* are coherent with the high morphological similarities of these species. On the neighbor-joining tree of the investigated taxa and sequences from GenBank (Figure 2) high similarity can be observed between *C. nigra* and its hybrid, *C. × degenii* with 100% bootstrap support.

Acknowledgements: The research was supported by the Research Centre of Excellence „17586-4/2013/TUDPOL Szent István University”, the project 4.2.1/B-09/1/KONV-2010-0006 „Szellemi, szervezeti és K+F infrastruktúra fejlesztés a Nyugat-magyarországi Egyetemen””KTIA_AIK_12-1-2012-0012” and „EU – Hungary joint project, co-financed by the European Social Fund TÁMOP 4.2.4.A/2-11-1-2012-0001 ‘National Excellence Program’” and TÁMOP-4.2.1/B-09/1/KONV-2010-0006 „Szellemi, szervezeti és K+F infrastruktúra fejlesztés a Nyugat-magyarországi Egyetemen”.

LITERATURE

- ALBAROUKI, E. – PETERSON, A. (2007): Molecular and morphological characterization of *Crataegus* L. species (*Rosaceae*) in southern Syria. — *Botanical Journal of the Linnean Society* 153(3): 255–263.
- BARTHA D. – KERÉNYI-NAGY V. (2010): Fekete galagonya – *Crataegus nigra* WALDST. et KIT. — *Tilia* 15: 54–74.
- CHRISTENSEN, K. I. (1992): Revision of *Crataegus* Sect. *Crataegus* and Nothosect. *Crataeguineae* (*Rosaceae-Maloideae*) in the Old World. — *Systematic Botany Monographs* vol. 35. The American Society of Plant Taxonomists, pp. 1–199.
- CINOVSKIS, (1971): *Crataegi Baltici* – Riga, 385 pp.
- DOYLE, J. J. – DOYLE, J. L. (1987): A rapid DNA isolation procedure for small quantities of fesh leaf tissue. — *Phytochemistry Bulletin* 19(1): 11–15.
- LARKIN, M. A. – BLACKSHIELDS, G. – BROWN, N. P. – CHENNA, R. – MCGETTIGAN, P.A. – MCWILLIAM, H. – VALENTIN, F. – WALLACE, I. M. – WILM, A. – LOPEZ, R. – THOMPSON, J. D. – GIBSON, T. J. – HIGGINS, D. G. (2007): Clustal W and Clustal X version 2.0. — *Bioinformatics* 23 (21): 2947–2948.
- LENDVAY B. – PEDRYC A. – KADERIET J. W. – WESTBERG E. – KOHUT E. – HÖHN M. (2012): A Jósika-orgona (*Syringa josikaea* JACQ. fil. ex RCHB.) aktuális és történeti biogeográfiája *Kitaibelia* 17 (1): 36.
- LO, E. Y. Y. – STEFANOVIĆ, S. – CHRISTENSEN, K. I. – DICKINSON, T. A. (2009): Evidence for genetic association between East Asian and western North American *Crataegus* L. (*Rosaceae*) and rapid divergence of the eastern North American lineages based on multiple DNA sequences. — *Molecular Phylogenetics and Evolution* 51: 157–168.
- MSZ EN ISO 21571:2005: CTAB based DNA extraction method. Hungarian Standard.
- PHIPPS, J. B. – O’KENNON, R. J. – LANCE, R. W. (2003): Hawthorns and medlars. Royal Horticultural Society Plant Collector Guide, Cambridge, pp. 1-139.
- SAITOU, N. – NEI, M. (1987): The neighbor-joining method: A new method for reconstructing phylogenetic trees. *Molecular Biology and Evolution* 4(4): 406–425.

Optimization of the Cutting Process of Wood-Based Agglomerated Materials by Abrasive Water-Jet

Monika KVIETKOVÁ – Štefan BARCÍK – Miroslav GAŠPARÍK*

Department of Wood Processing, Czech University of Life Sciences, Prague, Czech Republic

Abstract – The paper deals with the cutting MDF, OSB, and plywood boards by abrasive water-jet (GMA Garnet Australian, grain size 80, MESH = 0.188 mm), with a kerf width depending on the material properties and technical parameters (material thickness, cutting direction, abrasive flow, and feed speed). The entry of water-jet cutting in the longitudinal direction produces changes in the material due to lateral leads spreading the width of the cut joints by an average of 0.20 mm for MDF boards, 0.3 mm for OSB boards, and 0.17 mm for plywood. On the exit side of the material, the water has the opposite effect. In relation to the thickness of the material, the width of the cut joints increases. The experiment has shown that the optimum value of the feed speed is explicitly $400 \text{ mm} \cdot \text{min}^{-1}$, at which the kerf width reaches the lowest dimensions both at entry and exit, and the abrasive flow of $450 \text{ g} \cdot \text{min}^{-1}$ has been shown as optimum.

feed speed / water-jet / abrasive flow / kerf width / OSB / MDF / plywood

Kivonat – A faalapú agglomerált anyagok folyadéksugaras vágásának optimalizálása. E tanulmány az MDF, OSB és rétegelt lemezek abrazív szemcsés folyadéksugaras vágásának problémájával foglalkozik (GMA Garnet Australian, 80-as szemcseméret, 0,188 mm szitaméret), az anyagtulajdonságoktól és műszaki paraméterektől (anyagvastagság, vágási irány, szemcsekoncentráció és előtolási sebesség) függő vágásrés mérettel. A folyadéksugár longitudinális irányú belépése változásokat okoz az anyagban, mivel ez oldalirányban jobban szétteríti a vágásrés szélességét, MDF esetében átlag 0,20 mm-rel, OSB-nél átlag 0,30 mm-rel, rétegelt lemeznél pedig átlag 0,17 mm-rel. Az anyag kilépési oldalán a víz ezzel ellentétes hatást fejt ki. A vágásrés szélessége az anyagvastagsággal növekszik. A kísérletek megmutatták, hogy kimondottan a 400 mm/min előtolás az optimális, melynél a vágásrés szélessége a legkisebb a bemeneti és a kimeneti oldalon egyaránt. Szemcsekoncentráció tekintetében 450 g/min bizonyult optimálisnak.

előtolási sebesség / folyadéksugár / szemcsekoncentráció / vágásrés szélesség / OSB / MDF / rétegelt lemez

1 INTRODUCTION

With the application of the most-used natural resources, water and stone, we can cut almost every material. This makes the method of water-jet cutting (WJC) very efficient. It is a very simple, clean, and reliable technology, and therefore it becomes an alternative to other

* Corresponding author: gathiss@gmail.com; CZ-16521 PRAGUE, Kamýcká 129

methods. But there are also limitations to WJC which should be monitored and improved as a technological process.

Since the first industrial application of cutting materials by abrasive water-jet (AWJ) has happened in a relatively short time, the number of applications has increased considerably and certainly made a significant impact in almost all industries. Use of high-pressure water-jet technology is no longer considered as "additional technology" in classical mechanical tillage. For the efficient, environmentally friendly, and fast processing of different types of (hard-machinable) materials, appropriate technology is needed. The machining of special materials is preferably made by unconventional technologies, which operate on different principles from traditional methods. Non-conventional technologies used for material removal are mainly electro-thermal, electrochemical, chemical, and mechanical. The highest commercial success from technologies based on the mechanical principle comes from a quantum energy/pressure water beam (Barčík et al. 2011a).

We can simply describe water-jet cutting (WJC) technology as a process of reducing material by mechanical impact of a liquid on manufactured material. The technology of applied WJC can be divided into two basic groups: cutting by clean, native water-jet and cutting by abrasive water-jet. In wood-processing practice, cutting by clean, native water-jet is known as chipless cutting and abrasive water-jet cutting as chip producing cutting (Engelmann et al. 2007). The technological process uses a high-pressure and narrow, high-speed stream of water (water pressure around 400 MPa) as a cutting tool (Beer 2007, Maňková 2000). The abrasive water-jet is a wedge tool with an undefined cutting edge (as used in grinding), and the decisive mechanism for removal of machined material is similar to the above-mentioned method. Cutting-wedges are formed with abrasive grains randomly oriented in the beam (Barčík 2007, Matúška 2003). Most equipment for WJC around the world achieves high pressures by using a multiplier. The principle of high pressure generation by the multiplier lies in the combination of two tightly linked pistons (Gerencsér – Bejő 2007, Hashish 1991, Fabian – Hloch 2005).

The focus of this work is optimization of the cutting process, which is carried out by abrasive water-jet, through selected agglomerated materials. This investigation includes the dependence of the kerf width (top kerf width and bottom kerf width) on material properties and also on technical parameters (material thickness, cutting direction, abrasive flow, and feed speed).

2 MATERIALS AND METHODS

2.1 Material preparation

Agglomerated materials used for this experiment were produced by Kronospan Jihlava, Czech Republic. Specific agglomerated materials that have been used for this experiment are: MDF boards, OSB boards, and plywood boards.

Selected agglomerated boards were cut to samples with the following specifications:

- thickness of the test sample:
 - 22 mm / 44 mm / 66 mm — MDF board
 - 16 mm / 32 mm / 48 mm — OSB
 - 18 mm / 36 mm / 54 mm — plywood
- required width of the test sample: $b = 180 \text{ mm} (\pm 2.5 \text{ mm})$
- required length of the test sample: $l = 500 \text{ mm} (\pm 5 \text{ mm})$
- the moisture content of the test samples: $w = 8\% (\pm 2\%)$.

Test samples were cut according to a basic cutting plan for sample preparation (*Figure 1*). Consequently, three cuts were made for each thickness on the samples to eliminate the effect of specific properties of the given sample (*Figure 2*).

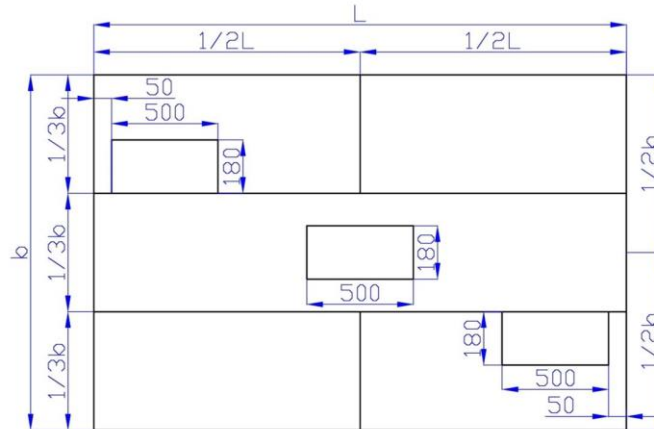


Figure 1. Preparation of test samples

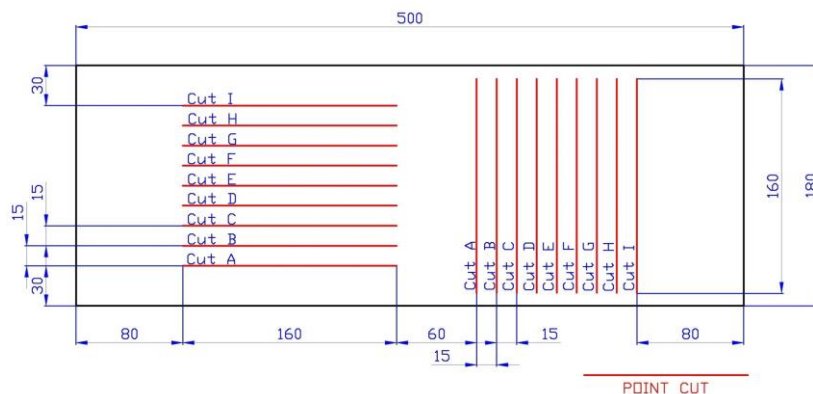


Figure 2. The cutting plan of the samples

2.2 Water-jet equipment

The methods corresponded to experimental tests presented by Barčík et al. (2009, 2011b) and Kviatková (2011). Cutting of samples was done by DEMA Ltd. in Zvolen. The equipment was assembled on the base of components from FLOW (USA) by PTV Ltd. (Prague) (*Figure 3*). It consisted of a high-pressure pump, PTV 37-60 Compact, and a work table with a water-jet head WJ 20 30 D-1Z supplied by PTV.

The technical parameters of the devices were similar to the research of Barčík et al. (2010a). The experiments were performed with the following technical parameters for the equipment:

- cutting liquid pressure: 4000 bar = 400 MPa
- abrasive: Australian garnet GMA (grain size 80, MESH = 0.188 mm)
- diameter of abrasive jet nozzle: 1 mm
- diameter of water-jet: 0.013 inch = 0.33 mm
- distance of nozzle above the work piece: 4 mm
- abrasive mass flow: $m_a = 250 \text{ g} \cdot \text{min}^{-1}$, $m_a = 350 \text{ g} \cdot \text{min}^{-1}$, $m_a = 450 \text{ g} \cdot \text{min}^{-1}$
- feed speed: $v_f = 600 \text{ mm} \cdot \text{min}^{-1}$, $v_f = 400 \text{ mm} \cdot \text{min}^{-1}$, $v_f = 200 \text{ mm} \cdot \text{min}^{-1}$
- water consumption: $3.8 \text{ l} \cdot \text{min}^{-1}$
- water beam power output: 5kW

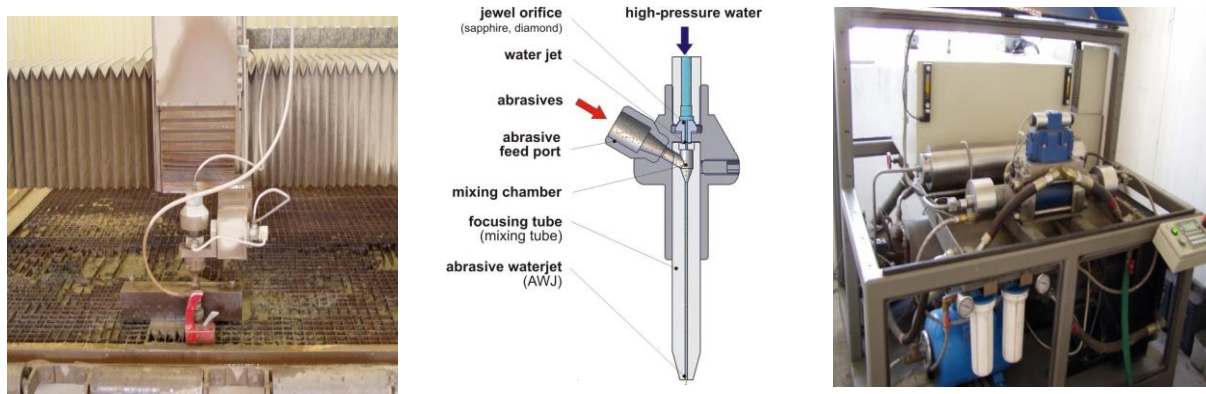


Figure 3. Equipment for cutting by water-jet (left), water-jet nozzle (center) and the high-pressure pump (multiplier) (right)

2.3 Measurement

This experiment was aimed at investigation of the kerf width, specifically top kerf width and bottom kerf width, which are represented in Figure 4.

- k_t – kerf width on the entry side (top kerf width): this kerf width, created by the passing of the abrasive water-jet through the material, was measured on the side where the water-jet goes into the material.
- k_b – kerf width on the exit side (bottom kerf width): this kerf width, created by the passing of the abrasive water-jet through the material, was measured on the side where the water-jet comes out of material.

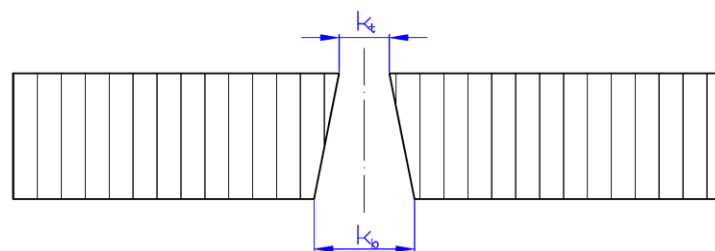


Figure 4. Illustration of the measured kerf widths (k_t – top kerf width, k_b – bottom kerf width)

1. Creation of digital photography

The creation of digital photography, with the kerf width and reference scale, is illustrated in Figure 5 and Figure 6:

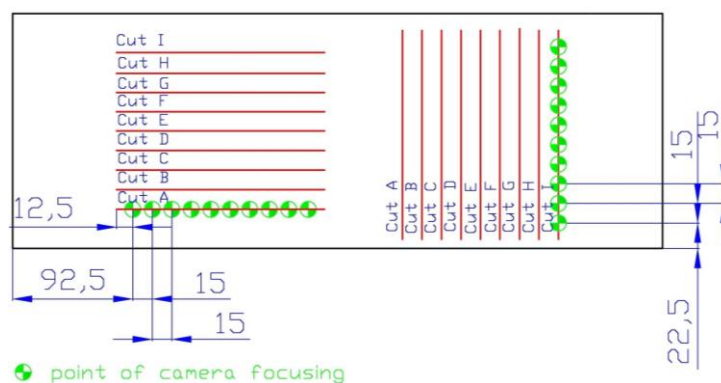


Figure 5. Measuring points of the kerf width

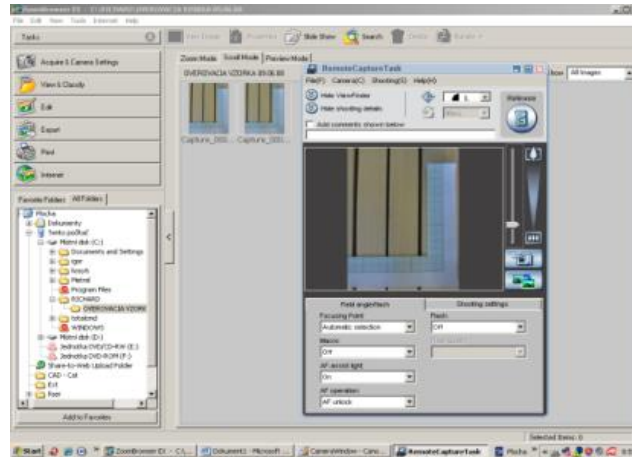


Figure 6. The example of digital picture creation with kerf for verification sample using the Zoom Browser EX 5.0 software

2. Measuring of kerf width

Measuring the kerf width on the exit of the water-jet process from the material becomes harder due to the rippled surface of cutting edge (Figure 9). For practical use the maximum size of the kerf is important (from the viewpoint of determining the material allowance for possible further work). The kerf width was measured as the distance of the two most remote parallel tangents placed to the cutting edge, while the evaluated cutting-edge length was always 15 mm.

3. Conversion of relative dimensions

The conversion of relative dimensions was done according to Equation 1:

$$k_b = \frac{k_p * a}{a_p} \quad (1)$$

where k_b is the actual width of the kerf [mm], k_p is the relative width of the kerf (the dimension measured by AutoCAD software from the digital picture), a is the actual dimension of the reference scale unit [mm], and a_p is the relative dimension of the reference scale unit (the dimension measured in AutoCAD software from the digital picture) (Figure 7).

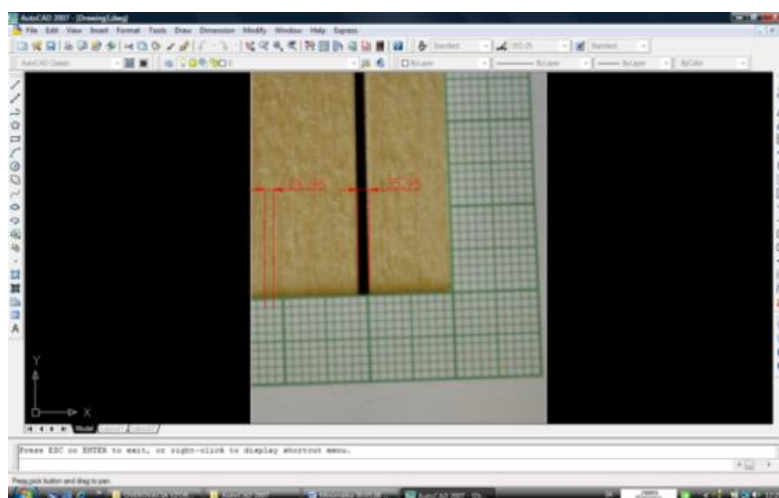


Figure 7. View of the AutoCAD software window during the relative measuring of dimensions

4. Statistical evaluation

From the given procedure we obtained a file of kerf width entry and exit values for all samples. Further, these values were evaluated with STATISTICA 7 software.

The devices and equipment for the measurement and evaluation were the following:

- personal computer (COMPAQ EVO N 1020v),
- digital camera (Canon Power Shot A520) (Figure 8),
- associated processing software for the digital camera (Canon-Zoom Browser EX 5.0) and for the comparative measuring of dimensions (AutoCAD 2007),
- reference scale (Barčík et al. 2010b)



Figure 8. Apparatus for measuring the kerf width

3 RESULTS AND DISCUSSION

3.1 MDF Boards

On the basis of multi-factorial variance analysis, the following sequence of significance of examined factors affecting the kerf width was found. The values are presented in Table 1 and Table 2.

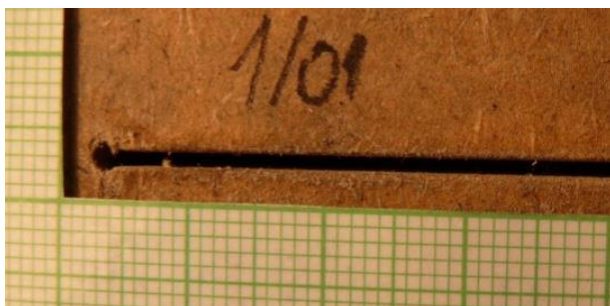


Figure 9. Digital picture of kerf on the MDF verification sample, kerf on the entry side of the material (left) and kerf on the exit side of the material (right)

Significance of entry factors:

1. cutting direction
2. feed speed
3. abrasive flow
4. thickness

Significance of exit factors:

1. thickness
2. feed speed
3. abrasive flow
4. cutting direction

Table 1. Values of multifactor analysis (MANOVA) at entry

Investigated factors	Sum of squares	Degrees of freedom	Scattering	F-test	Level of significance
	734.66	1.00	734.66	35,417.40	0.000
thickness	2.58	2.00	1.29	623.00	0.000
cutting direction	1.58	1.00	1.58	762.70	0.000
feed speed	1.20	2.00	0.60	289.40	0.000
abrasive flow	0.09	2.00	0.04	21.40	0.000
random factors	1.01	486.00	0.00		

Table 2. Values of multifactor analysis (MANOVA) at exit

Investigated factors	Sum of squares	Degrees of freedom	Scattering	F-test	Level of significance
	1,142.04	1.00	1,142.04	10,803.40	0.000
thickness	190.72	2.00	95.36	902.09	0.000
cutting direction	0.27	1.00	0.27	2.54	0.111
feed speed	58.54	2.00	29.27	276.86	0.000
abrasive flow	3.92	2.00	1.96	18.52	0.000
random factors	51.38	486.00	0.11		

Results of the effect of **cutting direction** on the kerf width are presented in Figure 10, Table 3 and Table 4.

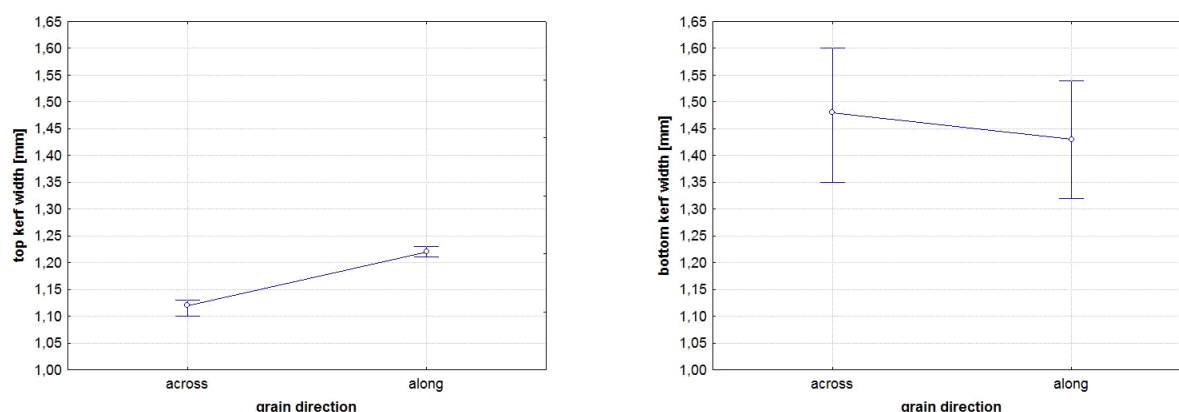


Figure 10. Graph of the kerf width dependence on the cutting direction of the worked material at entry (left) and at exit (right)

Table 3. Values of kerf-width dependence on cutting direction, at entry

Sample number	Cutting direction	Arithmetic mean	Standard deviation	Minimum value (mm)	Maximum value (mm)	Number of measurements	%
1	across	1.12	0.01	1.10	1.13	270	100
2	along	1.22	0.01	1.21	1.23	270	107.0

Table 4. Values of kerf-width dependence on cutting direction, at exit

Sample number	Cutting direction	Arithmetic mean	Standard deviation	Minimum value (mm)	Maximum value (mm)	Number of measurements	%
1	across	1.48	0.06	1.35	1.60	270	100
2	along	1.43	0.06	1.32	1.54	270	98.01

During the cutting of samples across the basic technology flow we can see that the values of kerf width at entry are 0.10 mm lower compared with longitudinal cutting. The values of the kerf width at the exit of the water-jet from the work piece reach higher values with cross cutting by 0.05 mm than with longitudinal cutting. At the entry of the water-jet into the material, the kerf width was wider than in longitudinal cutting. These results can be explained by the fact that wood and agglomerated materials in this direction are more resistant to penetration by the water-jet. The time the abrasive particles act on the material is prolonged and due to this fact leads to a side effect of the washing-out of the kerf. This resistance depends not only on the mutual connection of the fibers, but also on the strength of the elements themselves, first of all from libriform fibers, whose strength is influenced by the S₂ layer of the secondary wall. The strength and stability also can vary with the shape and slenderness of the fibers. From the viewpoint of uniformity of kerf width, the dimensions of kerf proved more stable on both sides with the cutting along the grain compared with basic technology flow.

Results of the effect of **material thickness** on the kerf width are presented in Figure 11, Table 5 and Table 6.

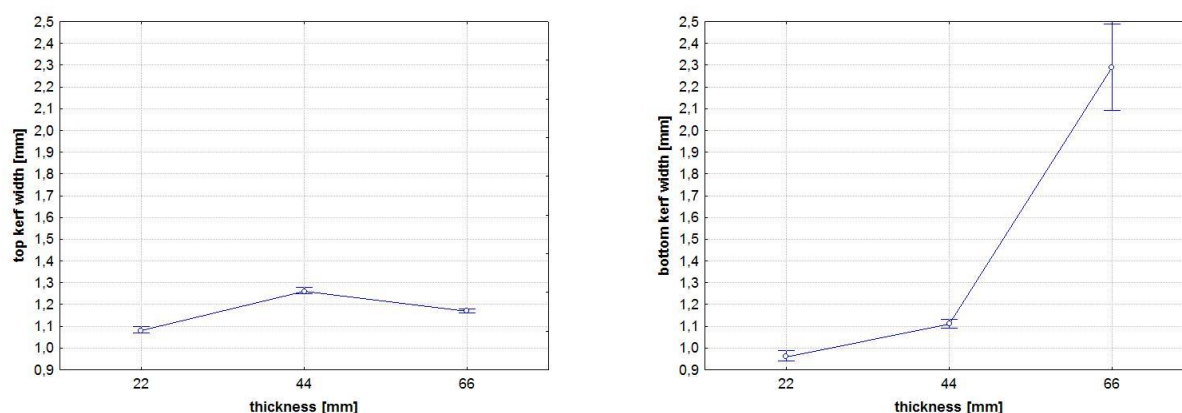


Figure 11. Graph of the kerf-width dependence on thickness of worked material at entry (left) and at exit (right)

Table 5. Values of kerf-width dependence on thickness, at entry

Sample number	Thickness	Arithmetic mean	Standard deviation	Minimum value (mm)	Maximum value (mm)	Number of measurements	%
1	22	1.08	0.01	1.07	1.10	180	100
2	44	1.26	0.01	1.25	1.28	180	128.28
3	66	1.17	0.01	1.16	1.18	180	117.51

Table 6. Values of kerf-width dependence on thickness, at exit

Sample number	Thickness	Arithmetic mean	Standard deviation	Minimum value (mm)	Maximum value (mm)	Number of measurements	%
1	22	0.96	0.01	0.94	0.99	180	100
2	44	1.11	0.01	1.09	1.13	180	108.24
3	66	2.29	0.10	2.09	2.49	180	144.33

A 0.18 mm increase in kerf width at entry was reached by the change in thickness of material from 22 mm to 44 mm. A 0.9 mm decrease in kerf width was caused by the change of material thickness from 44 mm to 66 mm.

A change in sample thickness from 22 mm to 44 mm caused a 0.15 mm increase in kerf width at the exit and a change in thickness from 44 mm to 66 mm caused increased kerf width of 1.18 mm. The greater the thickness the higher the amount of abrasive particles gathered in the cut, and these particles apart from the primary effect, severing of material, also cause the side effect of widening of the kerf due to the washing-out of material. The increased values of the kerf width in the test samples of higher thickness were significantly influenced by the lag of the water-jet caused by the gradual loss of its kinetic energy.

From this experiment we can see that the optimum material thickness is 22 mm. This thickness caused the lowest kerf-width values in the entry and also in the exit.

Results of the **feed speed** influence:

At entry, the change of the feed speed from $200 \text{ mm} \cdot \text{min}^{-1}$ to $400 \text{ mm} \cdot \text{min}^{-1}$ caused 3 mm lower values in kerf width. The change of feed speed from $400 \text{ mm} \cdot \text{min}^{-1}$ to $600 \text{ mm} \cdot \text{min}^{-1}$ caused an increase in kerf width of 5 mm.

At exit, the change in feed speed from $200 \text{ mm} \cdot \text{min}^{-1}$ to $400 \text{ mm} \cdot \text{min}^{-1}$ caused an increase of kerf width of 6 mm. The change of feed speed from $400 \text{ mm} \cdot \text{min}^{-1}$ to $600 \text{ mm} \cdot \text{min}^{-1}$ caused an increase of 3 mm.

The experiment has shown that the optimum value of the feed speed is explicitly $400 \text{ mm} \cdot \text{min}^{-1}$, at which the kerf width reaches the lowest dimensions both at entry and exit.

Results of **abrasive flow** influence on kerf width:

With the change of the added amount of abrasive from $250 \text{ g} \cdot \text{min}^{-1}$ to $350 \text{ g} \cdot \text{min}^{-1}$, the values of the kerf width increased at entry by 2 mm, and then with an increase of the abrasive amount to $450 \text{ g} \cdot \text{min}^{-1}$ they increased by another 2 mm.

By changing the added amount of abrasive from $250 \text{ g} \cdot \text{min}^{-1}$ to $350 \text{ g} \cdot \text{min}^{-1}$, in the exit of the water-jet process from the worked material, the kerf-width values decreased by 3 mm. With the change of the amount of abrasive from $350 \text{ g} \cdot \text{min}^{-1}$ to $450 \text{ g} \cdot \text{min}^{-1}$, the values decreased by 6 mm.

With an increase of the abrasive mass flow up to $450 \text{ g} \cdot \text{min}^{-1}$, the kinetic energy of the particles was consumed by their mutual contact, which created the secondary effect of washing-out of the material at entry and the subsequent narrowing of the kerf width at the exit due to energy loss. However, in comparison with the uniformity of the values at both sides, the value of $450 \text{ g} \cdot \text{min}^{-1}$ abrasive mass flow has seemed optimum.

3.2 OSB Boards

Cutting of OSB boards was represented by more ripped kerf at entry side in comparison with MDF boards (Figure 12). The individual values, for this type of material, are presented in Table 7 and Table 8.

On the basis of multifactorial variance analysis, the following sequence of significance of examined factors affecting the kerf width was found.

Significance of entry factors:

1. cutting direction
2. feed speed
3. abrasive flow
4. thickness

Significance of exit factors:

1. thickness
2. feed speed
3. abrasive flow
4. cutting direction

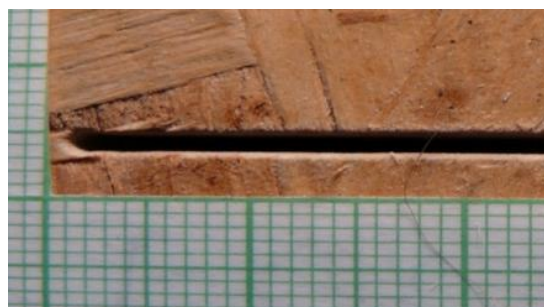
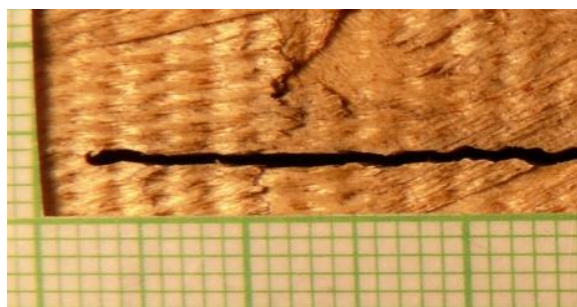


Figure 12. Digital picture of kerf on the OSB verification sample, kerf at the entry of the water-jet into the material (left) and kerf at the exit of the water-jet from the material (right)

Table 7. Values of multifactor analysis (MANOVA) at entry

Investigated factors	Sum of squares	Degrees of freedom	Scattering	F-test	Level of significance
	662.022	1	662.022	296,662.9	0.000
thickness	0.0358	2	0.0179	8.0	0.000
cutting direction	4.1639	1	4.1639	1,865.9	0.000
feed speed	1.4355	2	0.7177	321.6	0.000
abrasive flow	0.2071	2	0.1036	46.4	0.000
random factors	1.0845	486	0.0022		

Table 8. Values of multifactor analysis (MANOVA) at exit

Investigated factors	Sum of squares	Degrees of freedom	Scattering	F-test	Level of significance
	1,040.613	1	1,040.613	25,465.51	0.000
thickness	45.281	2	22.641	554.06	0.000
cutting direction	0.111	1	0.111	2.72	0.100
feed speed	5.681	2	2.841	69.52	0.000
abrasive flow	0.519	2	0.26	6.36	0.002
random factors	19.86	486	0.041		

Results of the effect of cutting direction on the kerf width are presented in Figure 13, Table 9, and Table 10.

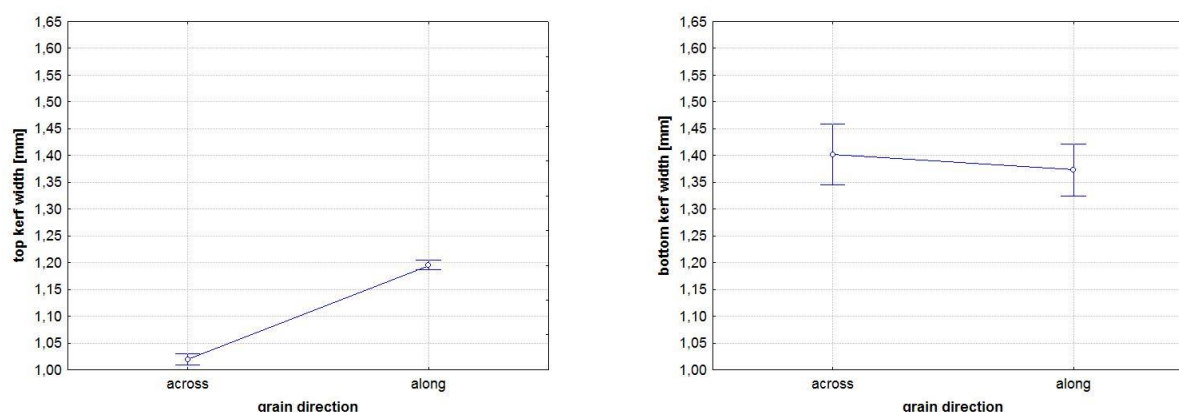


Figure 13. Graph of the kerf-width dependence on cutting direction of worked material, at entry (left) and exit (right)

During the cross cutting of samples according to material flow we can see that the values of kerf width at entry were 0.17 mm lower compared with longitudinal cutting. During the cross cutting of samples according to material flow we can see that values of kerf width at exit are 0.029 mm higher compared with longitudinal cutting.

Table 9. Values of kerf-width dependence on cutting direction, at entry

Sample number	Cutting direction	Arithmetic mean	Standard deviation	Minimum value (mm)	Maximum value (mm)	Number of measurements	%
1	across	1.019	0.006	1.009	1.030	270	100
2	along	1.195	0.004	1.187	1.204	270	117.23

Table 10. Values of kerf-width dependence on cutting direction, at exit

Sample number	Cutting direction	Arithmetic mean	Standard deviation	Minimum value (mm)	Maximum value (mm)	Number of measurements	%
1	across	1.403	0.029	1.346	1.459	270	100
2	along	1.374	0.025	1.325	1.423	270	97.96

Results of the **feed speed** influence:

At the entry of the water-jet, the change of the feed speed from 200 mm·min⁻¹ to 400 mm·min⁻¹ caused 7.1 mm lower values of kerf width. The change of feed speed to 600 mm·min⁻¹ caused lower kerf width by 9.67 mm. At the exit of the water-jet from the material, the change in feed speed from 200 mm·min⁻¹ to 400 mm·min⁻¹ caused decreased kerf width by 5.21 mm, and the increasing of feed speed to 600 mm·min⁻¹ caused an increase of 10.34 mm.

Influence of **abrasive flow** on kerf width:

With the change of the added amount of abrasive from 250 g·min⁻¹ to 350 g·min⁻¹, the values of the kerf width decreased at entry by 0.16 mm, and then with an increase of the abrasive amount to 450 g·min⁻¹ they increased by 3.71 mm. With the change of the added amount of abrasive from 250 g·min⁻¹ to 370 g·min⁻¹, the values of the kerf width decreased at

exit by 3.31 mm, and then with an increase of the abrasive amount to $450 \text{ g} \cdot \text{min}^{-1}$ they decreased by 5.26 mm.

Results of the influence of **material thickness** on kerf width are presented in *Figure 14*, *Table 11* and *Table 12*.

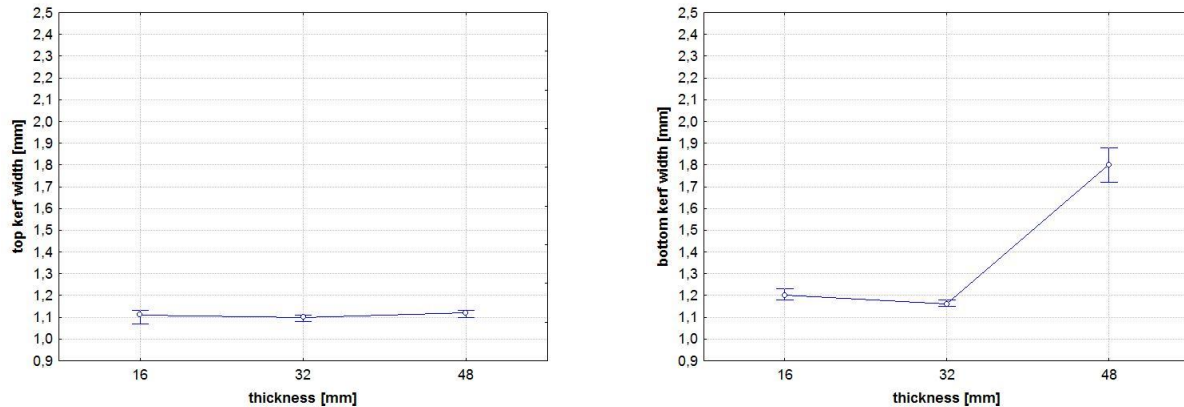


Figure 14. Graph of the kerf-width dependence on thickness of worked material, at entry (left) and exit (right)

The 0.01 mm decrease in kerf width at entry was reached by the change in thickness of material from 16 mm to 32 mm. The 0.02 mm increase in kerf width was caused by the change of material thickness from 32 mm to 48 mm. The 0.04 mm decrease of kerf width at exit was reached by the change in thickness of material from 16 mm to 32 mm. The 0.64 mm increase of kerf width was caused by the change of material thickness from 32 mm to 48 mm.

Table 11. Values of kerf-width dependence on thickness, at entry

Sample number	Thickness	Arithmetic mean	Standard deviation	Minimum value (mm)	Maximum value (mm)	Number of measurements	%
1	16	1.11	0.01	1.07	1.13	180	100
2	32	1.10	0.01	1.08	1.11	180	98.74
3	48	1.12	0.01	1.10	1.13	180	101.34

Table 12. Values of kerf-width dependence on thickness, at exit

Sample number	Thickness	Arithmetic mean	Standard deviation	Minimum value (mm)	Maximum value (mm)	Number of measurements	%
1	16	1.20	0.01	1.18	1.23	180	100
2	32	1.16	0.01	1.15	1.18	180	96.74
3	48	1.80	0.04	1.72	1.88	180	149.34

3.3 Plywood

Cutting of plywood was different in relation to kerf width because of wider entry kerf (*Figure 15*). The importance of monitored factors influencing kerf width on plywood is presented in *Table 13* and *Table 14*.

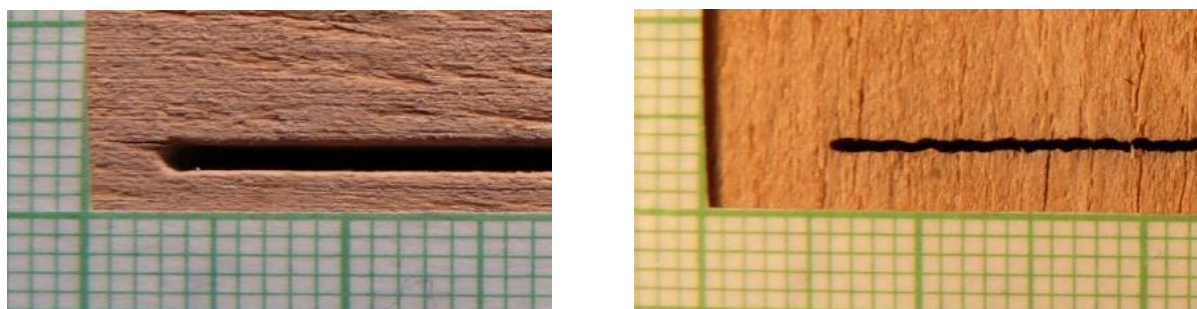


Figure 15. Digital picture of kerf on the plywood verification sample, kerf on the entry of the water-jet into material (left) and kerf on the exit of the water-jet from the material (right)

Table 13. Values of multifactor analysis (MANOVA) at entry

Investigated factors	Sum of squares	Degrees of freedom	Scattering	F-test	Level of significance
	729.335	1	729.3352	24,4285.6	0.000
thickness	0.8664	2	0.4332	145.1	0.000
cutting direction	8.8182	1	8.8182	2,953.6	0.000
feed speed	1.4337	2	0.7169	240.1	0.000
abrasive flow	0.2854	2	0.1427	47.8	0.000
random factors	1.451	486	0.003		

Table 14. Values of multifactor analysis (MANOVA) at exit

Investigated factors	Sum of squares	Degrees of freedom	Scattering	F-test	Level of significance
	768.0995	1	768.0995	5,2711.9	0.000
thickness	15.6655	2	7.8328	537.53	0.000
cutting direction	8.2088	1	8.2088	563.34	0.000
feed speed	1.528	2	0.764	52.43	0.000
abrasive flow	0.0381	2	0.0191	1.31	0.271
random factors	19.86	486	0.041		

Significance of entry factors:

1. cutting direction
2. feed speed
3. thickness
4. abrasive flow

Significance of exit factors:

1. cutting direction
2. thickness
3. feed speed
4. abrasive flow

The effect of cutting direction on kerf width is presented in Figure 16, Table 15 and Table 16.

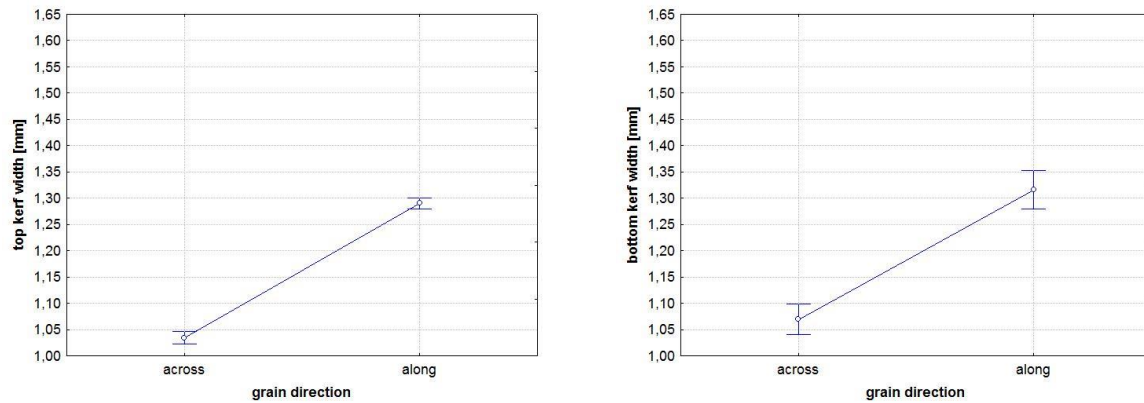


Figure 16. Graph of the kerf-width dependence on cutting direction of the worked material, at entry (left) and exit (right)

Table 15. Values of kerf-width dependence on cutting direction, at entry

Sample number	Cutting direction	Arithmetic mean	Standard deviation	Minimum value (mm)	Maximum value (mm)	Number of measurements	%
1	across	1.034	0.006	1.022	1.047	270	100
2	along	1.290	0.006	1.279	1.301	270	124.7

Table 16 Values of kerf-width dependence on cutting direction, at exit

Sample number	Cutting direction	Arithmetic mean	Standard deviation	Minimum value (mm)	Maximum value (mm)	Number of measurements	%
1	across	1.069	0.015	1.040	1.099	270	100
2	along	1.316	0.018	1.280	1.352	270	123.05

The values of kerf width at entry were about 0.256 mm lower compared with longitudinal cutting at cross cutting. Values of kerf width at exit are 0.249 mm lower compared with longitudinal cutting.

Results of the **feed speed** influence:

At the entry of the water-jet, the change of the feed speed from 200 mm·min⁻¹ to 400 mm·min⁻¹ caused 3.62 mm lower values of kerf width. The change of feed speed to 600 mm·min⁻¹ caused lower kerf width by 4.09 mm. At the exit of the water-jet from the material, the change in feed speed from 200 mm·min⁻¹ to 400 mm·min⁻¹ caused decreased kerf width by 4.2 mm, and the increasing of feed speed to 600 mm·min⁻¹ caused its decrease by 1.17 mm.

Results of the influence of thickness on kerf width are presented in Figure 17, Table 17 and Table 18.

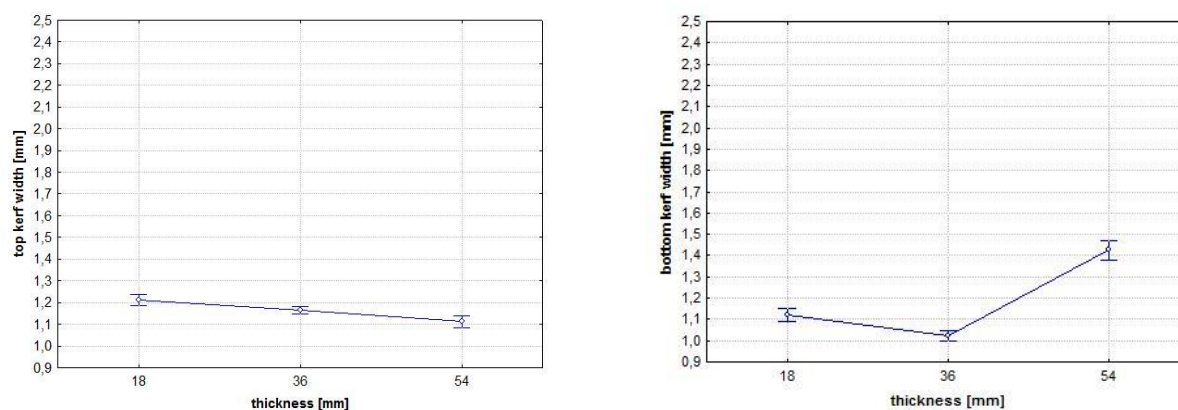


Figure 17. Graph of kerf-width dependence on thickness of worked material, at entry (left) and exit (right)

Table 17. Values of kerf-width dependence on thickness, at entry

Sample number	Thickness	Arithmetic mean	Standard deviation	Minimum value (mm)	Maximum value (mm)	Number of measurements	%
1	18	1.21	0.1	1.19	1.24	180	100
2	36	1.17	0.1	1.15	1.18	180	97.25
3	54	1.12	0.1	1.09	1.14	180	92.14

Table 18. Values of kerf-width dependence on thickness, at exit

Sample number	Thickness	Arithmetic mean	Standard deviation	Minimum value (mm)	Maximum value (mm)	Number of measurements	%
1	18	1.12	0.1	1.09	1.15	180	100
2	36	1.03	0.1	1.05	1.00	180	94.59
3	54	1.43	0.1	1.38	1.47	180	132.54

Results of the influence of **thickness**:

A 0.04 mm decrease in kerf width at entry was caused by the change in thickness of material from 18 mm to 36 mm. A 0.05 mm increase in kerf width was caused by the change of material thickness from 36 mm to 54 mm. A 0.09 mm decrease in kerf width at exit was caused by the change in thickness of material from 18 mm to 36 mm. A 0.4 mm increase in kerf width was caused by the change of material thickness to (Figure 17).

Influence of **abrasive flow** on kerf width:

With the growth of the added amount of abrasive from 250 g·min⁻¹ to 350 g·min⁻¹, the values of kerf width increased at entry by 3.1 mm, and then with the change of the abrasive amount to 450 g·min⁻¹, values increased by 4.9 mm. With the growth of the added amount of abrasive from 250 g·min⁻¹ to 350 g·min⁻¹, the values of kerf width increased at exit by 1.73 mm. Growth of the abrasive amount to 450 g·min⁻¹ caused increased kerf width by 0.73 mm. See the presented graphical values for the most important factor and for all materials.

Water-jet cutting is an economical way to cut 2D shapes into a wide range of materials with no tooling costs. The unique process of water-jet cutting provides reasonably good edge quality, no burrs, and usually eliminates the need for secondary finishing processes. The

process also generates no heat so the material edge is unaffected and there is no distortion. Water-jet cutting can cut single or multi-layer materials (Rašner et al. 2001).

It is necessary to take an economic view of the whole process of WJC. It should be compared with other cutting techniques from the point of view of costs and benefits. It must be monitored and costs quantified for WJC assembly and the whole material flow, including fixed costs, variable costs (e.g., energy consumption), and also alternative costs related to other (conventional) methods of cutting. Another necessary parameter is time of production (cutting) which affects total capacity and also productivity of an assembly for the material flow. Last but not least, the economic viewpoint must also consider the amount of waste from the water-jet cutting compared with conventional methods of cutting (Rajnoha – Aláč 2003).

4 CONCLUSIONS

The experiments have shown that utilization of the water-jet for cutting agglomerated materials is a suitable method when it is used with the appropriate combination of technical and technological parameters. The most important benefit of this technology is small kerf width compared with other cutting technologies. From the viewpoint of kerf-width equality on both sides of the worked material, we can see more stable dimensions of kerf width with materials cut in the longitudinal direction. From the viewpoint of the technological parameters used, the feed speed of $400 \text{ mm} \cdot \text{min}^{-1}$ and the abrasive flow of $450 \text{ g} \cdot \text{min}^{-1}$ have been shown to be optimum. With thicknesses exceeding 44 mm, the method becomes less efficient and it's necessary the improvement of material by additional working.

Acknowledgments: The authors are grateful for the support of CIGA (CULS Grant Agency), project No. 20124311. The authors would like to thank the DEMA Ltd. Zvolen for technical support.

REFERENCES

- BARCÍK, Š. (2007): Progresívna metóda obrábania dreva vodným lúčom. [Progressive method of wood manufacturing by water jet]. In: Proceedings of the conference "Woodcut Tools and Woodworking". Zvolen, Slovakia. December 2007. 3–11.
- BARCÍK, Š. – KMINIAK, R. – ŠUSTEK, J. (2009): The influence of the parameters of native wood cutting process by abrasive water-jet on the kerf width, In: Proceedings of the 3rd International Scientific Conference "Woodworking Technique". Zalesina, Croatia. 2–6 September 2009. 19–31.
- BARCÍK, Š. – KVIETKOVÁ, M. – KMINIAK, R. – REMESELNÍK, J. (2010a): Vplyv hrúbky a smeru rezania na šírku reznej špáry pri rezaní MDF vodným lúčom. [Impact of thickness and cutting direction on the kerf width during the MDF water jet cutting]. In: Proceedings of the conference "Chip and Chipless Woodworking". Terchová, Slovakia. 09-11 September 2010, 33–40.
- BARCÍK, Š. – KVIETKOVÁ, M. – KMINIAK, R. – REMESELNÍK, J. (2010b): Vplyv rýchlosti posuvu a hmotnostného toku abrazíva na šírku reznej špáry pri rezaní MDF vodným lúčom. [Effect of feed speed abrasive mass flow landscape kerf when cutting MDF water jet], In: Proceedings of the 1th International video conference "Nábytkárstvo" Zvolen, Slovakia. 26 October 2010, 3–12.
- BARCÍK, Š. – KVIETKOVÁ, M. – ALÁČ, P. (2011a): Effect of the chosen parameters on deflection angle between cutting sides during the cutting of agglomerated materials by water jet. *Wood Research* 56 (4): 577–588.
- BARCÍK, Š. – KVIETKOVÁ, M. – KMINIAK, R. – ALÁČ, P. (2011b): Optimization of cutting process of medium density fibreboards by the abrasive water jet. *Drvna Industrija* 62 (4): 263–268.

- BEER, P. (2007): Niekonwencjonalne narzędzia do obróbki drewna. [Unconventional tools for woodworking]. Wydawnictwo Akademii Rolniczej im. Augusta Cieszkowskiego, Poznań. 74 p. (in Polish)
- ENGELMANN, B. K. – HERBRICH, H. – KESSLER, B. (2007): *Schneiden mit Laserstrahlung und wasserstrahl..* Ehningen bei Böblingen: Expert-Verlag, Berlin. 179 p. (in German)
- FABIAN, S. – HLOCH, S. (2005): Abrasive water jet process factors influence on stainless steel AISI 304 macrogeometrical cutting duality, In: Scientific Bulletin: Serie C. Volume 19: Mechanics, Tribology, Machine Manufacturing Technology. North University of Baia Mare, Romania, 261–266.
- GERENCSÉR, K. – BEJÓ, L. (2007): Investigations into the cutting of solid wood, Wood Research 52 (2): 57–28.
- HASHISH, M. (1991): Optimalization factors in abrasive waterjet machining. Journal of Manufacturing Science and Engineering - Transactions of the ASME 113 (1): 29–37.
- KRAJNÝ, Z. (1998): Vodný lúč v praxi- WJM. [Water jet in practice]. EPOS, Bratislava. 383 p. (in Slovak)
- KVIETKOVÁ, M. (2011): Analýza faktorov vplyvujúcich na kvalitu opracovania kompozitných drevných materiálov pri rezaní vodným lúčom. [Analysis of factors which impact the quality of manufacturing wood materials by the abrasive water jet cutting], Ph.D. Thesis, Technical University in Zvolen, Slovakia, p. 157. (in Slovak)
- MAŇKOVÁ, I. (2000): Progresívne Technológie. [Progressive Technologies]. Viena, Košice. 275 p. (in Slovak)
- MATÚŠKA, J. (2003): Delenie materiálov vodným lúčom. [Waterjet cutting of materials]. Strojárstvo 7 (11), 35 p. (in Slovak)
- RAJNOHA, R. – ALÁČ, P. (2003): Activity based costing—A necessary assumption for the management based on processes, In: Proceedings of the conference “Intercathedra”, Komitet Badań Naukowych: Poznań. Volume 19. 108–111.
- RAŠNER, J. – KOTLÍNOVÁ, M. – DEMOČ, V. – RAJNOHA, R. – ALÁČ, P. (2001): Ekonomika a riadenie logisticko-distribučných systémov podnikov priemyslu spracovania dreva. [Economy and management of logistics and distribution systems of wood industrial enterprises]. Scientific study 1/2001/B, 140 p. (in Slovak)

Enhancement of the Corporate Environmental Performance

András POLGÁR* – József PÁJER

Institute of Environmental and Earth Sciences, Faculty of Forestry, University of West Hungary, Sopron, Hungary

Abstract – In the course of the implementation of the environmental management system (*EMS*), during the planning phase, it is of high priority to explore, select and analyse the relevant environmental aspects and impacts. This is the precondition to enhance the real environmental performance (*EP*). The applied processes are often specific, formal and influenced by the self-interest of a company. The purpose of our work was the uniformly interpretable evaluation of the varied processes, and the creation of an *EMS* enhancement model through which the physical *EP* can be improved. The quantitative empirical research (2010–2011) has been conducted by using questionnaires in 114 domestic and multinational companies applying an *EMS* according to the international standard *ISO 14001*.

In the created database, we have determined the variables which are relevant and adjustable in the process, through a descriptive and multivariable statistical survey. On the basis of the identified performance dimensions, corporate performance indices have been created: the environmental motivation (*MOT*), environmental performance (*EPI*), environmental impact evaluation (*EIE*) and environmental management (*EMI*) as well as the aggregative index (*AGG*). With their help, the evaluation of the surveyed corporate performance can be executed uniformly, in a quantifiable way, without any intervention in the corporate processes. Along the outliers of *EMS* optimization variables, we have identified development points. Their impact was assessed by sensitivity analysis of the indices. The described method offers a model for *EMS* development, based on self-evaluation.

environmental management / impact evaluation / environmental performance indices / development model

Kivonat – A vállalati környezeti teljesítmény fejlesztése. A környezetirányítási rendszer (röviden: *KIR*) mögött rejlő valós környezeti teljesítmény (röviden: *KT*) érdekében a „Tervezési (Plan)” fázisban a környezeti tényezők és –hatások feltárása és elemzése, a releváns környezeti tényezők kiválasztása kiemelt fontosságú a rendszer kiépítése során. A tapasztalatok szerint az alkalmazott eljárások gyakran sajátosak, formálisak, a vállalat egyedi érdekei által meghatározottak. Munkánk során célként tűztük ki a változatos eljárások egységesen értelmezhető értékelését és egy olyan *KIR* fejlesztési modell megalkotását, amely alkalmazásával a fizikai *KT* javítható. A kvantitatív empirikus kutatást (2010–2011) az *ISO 14001* nemzetközi szabvány szerinti *KIR*-t alkalmazó hazai és multinacionális vállalatok között (114 db) végeztük kérdőíves módszerrel.

A létrehozott adatbázisban leíró és többváltozós statisztikai vizsgálatokkal meghatároztuk a releváns és a folyamatban szabályozható, az optimalizálásra ezért potenciálisan alkalmas változókat, a változó párok korrelációit és a témakör főbb teljesítmény dimenzióit jelentő változó csoportokat. Az azonosított teljesítmény dimenziókra alapozottan teljesítmény indexeket (4+1 db) hoztunk létre: környezetvédelmi motivációs (*MOT*), környezeti teljesítmény (*KTM*), környezeti hatásértékelési

* Corresponding author: polgar.andras@emk.nyme.hu; H-9400 SOPRON, Bajcsy Zs. u. 4.

(KHÉ) és környezeti menedzsment (KMR), valamint az aggregált index (AGG). Értékeiken keresztül egységesen, relatív, számszerűsíthető módon megadható a vizsgált vállalati teljesítmény adott szintet jellemző értékelése a változatos vállalati folyamatokba történő beavatkozás nélkül. A KIR optimalizálási változók szélső értékei mentén az indexek érzékenységvizsgálatával a szignifikáns eltérést okozó változók jelentésértelme alapján fejlesztési pontokat (36 db) és azok befolyását és területét azonosítottuk. E módszerrel létrehoztuk az önértékelésen alapuló KIR fejlesztési modellt.

környezetmenedzsment / hatásértékelés / környezeti teljesítmény index / fejlesztési modell

1 INTRODUCTION

Environmental management system (EMS) is part of the management system of an organization with the task to develop and establish, operate and continuously improve the environmental policy of the organization and manage the environmental aspects. The advantage of these systems standardised by international organizations is that they may be certified by specialised certifying systems or authorities (e.g. ISO 14001, EMAS). Standardized processes providing authoritative (certified) information for competitors and society are being applied worldwide. At the same time it is observable – probably just on the ground of the market competition – that the processes are often specific, formal and influenced by the self-interest of the company.

A number of empirical studies performed in this field have resulted in differing verdicts. Several studies have shown no significant link between measures of environmental performance and profitability (Fogler – Nutt, 1975; Rockness et al., 1986) or between environmental performance and corporate disclosure practices (Freedman – Jaggi, 1982; Wiseman, 1982). But other studies have shown that better pollution performance improved profitability (Bragdon – Marlin, 1972; Spicer, 1978a) and reduced risks (Spicer, 1978b) and that federal compliance liability costs and profitability were negatively related (Holman et al., 1985).

The change in the properties of the environmental elements and systems resulting due to human activity is the *environmental impact*. The *evaluation* of the environmental impact purposes to express the consequence of the change. At the same time, it prepares and establishes measurements and decisions. The evaluation of environmental impacts also provides the basis for the comparison of the different activities according to environmental aspects.

Identification, continuous evaluation and rating of the environmental impacts can be considered as a specific interest for a company. Through the co-operation in environmental protection, it is also of public interest. The environmental management systems (KÖVET EMS - Checklist 2007) are playing a key role in managing the domestic corporate environmental impacts (Polgár 2012).

Because of the interrelationships in the complex environmental system, the corporate environmental impacts have to be studied as an integral part of this system. In order to rate the impact on the environment, expert examinations were developed principally in connection to the environmental impact assessments. Beyond that, in the corporate practice, demand emerged for wider systems which measure the necessity of rehabilitation (defining the significant damaging impact). There is a significant need for the indication of positive impacts during performance evaluation (Pájer 2011).

In our survey, we applied the following definition to interpret the concept of the corporate environmental performance (EP): *environmental performance* is the material, energy and information flow which emerges during the normal and abnormal operation state of an organization, impacting the surrounding environmental system in a positive or

negative way, coming from the input or output side (i. e. the physical trend of *EP*), furthermore it is the extent of efficiency of the processes developed in order to manage these flows (i. e. the management trend of *EP*), corrected by the quality properties of the specific impacts regarding the condition and sensitivity of the affected environment.

Due to the rapid spreading of *ISO 14001* more and more companies are applying underlying *EMS* evaluation methods (Savage 2000). During the *EMS environmental impact evaluation process*, the main purpose of the evaluation of the environmental factors is to determine the harmful changes caused in the state of the environment. In the course of the evaluation, the occurrence probability and seriousness of the harmful change is required to be taken into account.

Kerekes – Kindler (1997) draws the attention to the fact that companies possessing the *ISO 14001* certificate need not qualify as environmentally friendly. According to the international standard requirements, improvement of *EP* may be measured and accepted by auditors, based purely on the adequacy regarding regulations (i. e. the management *EP*). The physical, environmental aspects can be overshadowed by the management trend (Seifert 1998).

The survey, *consideration and comprehension of environmental aspects and impacts* of the organization is the element of the ‘Plan’ phase. It is also the *most essential* element of the whole system implementation. It requires particular consideration, during its examination; engineering and technical accuracy is needed and it is of course the step requiring highest creativity (Nagy – Torma – Vagdalt 2006). This is the basis of the formulation of the environmental policy as well as the set-up for environmental objectives, and for the selection of priorities.

We stated that the *EMS* impact evaluation processes usually generate results during the evaluation (application of ordinal scale) by binary ranging of impacts (significant and non-significant impacts). During our survey, we studied mainly the application and the further developed forms of the *ABC* analysis, from among the matrix techniques of impact assessment methods (Pájer 1998, Rédey – Módi – Tamaska 2002, Nagy – Torma – Vagdalt 2006, Polgár 2011). In order to expand the environmental information achieved by an *EMS* impact evaluation process, we recommend further environmentally aware corporate management instruments, by which the efficiency of the ‘Plan’ phase can be improved (Polgár 2012).

We found that compared to other environmental performance evaluation methods, the *EMS* impact evaluation process showed the minimum complexity of the application and of the aggregation level (on the basis of the classification of Torma, (2007).

Hofstetter (1998, cited by Frischknecht, 2005), distributed the decision support tools by matrixes between methods being interpretable on micro-, meso- and macro-level, and analysing social, environmental and economic properties. We concluded that in this distribution, the *EMS* environmental impact evaluation is applicable on meso-level (within project level). It can be considered as a method describing the environmental dimension. From the point of view of environmental management system on meso-level, on the basis of the classification modifications recommended by Torma (2007), it provides a technique covering social, environmental, economical dimensions.

We organized the main idea of our survey around the concept of Winter (1997). According to it, the result based on the environmental impacts reflecting in the *EP* will rely on whether the companies and advisers implementing the system, attempt to build up a functioning system, or they are satisfied with an accurately documented (and certifiable) system, which may not function.

The purpose of our survey was the uniformly interpretable evaluation of the varied processes. Furthermore the creation of an *EMS* development model concept aimed at the functional utilization of the results and the improvement of the parameters concerning the physical *EP*. We tried to find the answers to the following questions: Which are the main

efforts of the organizations applying *EMS* to fulfil the international standard requirements? What is the role of the 'Plan' phase in the improvement of the efficiency of *EMS*? Which parameters do play a role in its optimization? Which are the determinant dimensions of environmental performance in the 'Plan' phase? How and at what level can the *EMS* practice of companies be assessed? How can the efficiency of *EMS* be improved in practice?

2 MATERIAL AND METHOD

We assumed that there are factors along which, from the point of view of the physical *EP*, the optimization process of *EMS* is *biased*. This could be, for example, the low level of management of environmental impacts or the overemphasising of management issues.

The cardinal point of the proper operation is to identify and evaluate the relevant pairs of 'environmental factor-environmental impact' in a more accurate way *based on environmental science*. This will be followed by the *integration of this environmental information* in the process of the determination of the environmental objectives. In the *PDCA* cycle (Plan – Do – Check – Act) operating the *EMS*, this process is covered by the 'Plan' phase ("Planning – Execution – Control – Action" or *PDCA* method).

Specifically in the physical *EP* dimension, the description of the "*partial*" *performance pertinent to the management of the environmental impacts* was defined on the basis of the detection of the variables and *optimization parameters* of the 'Plan' phase and the *EMS* impact evaluation process (Figure 1.).

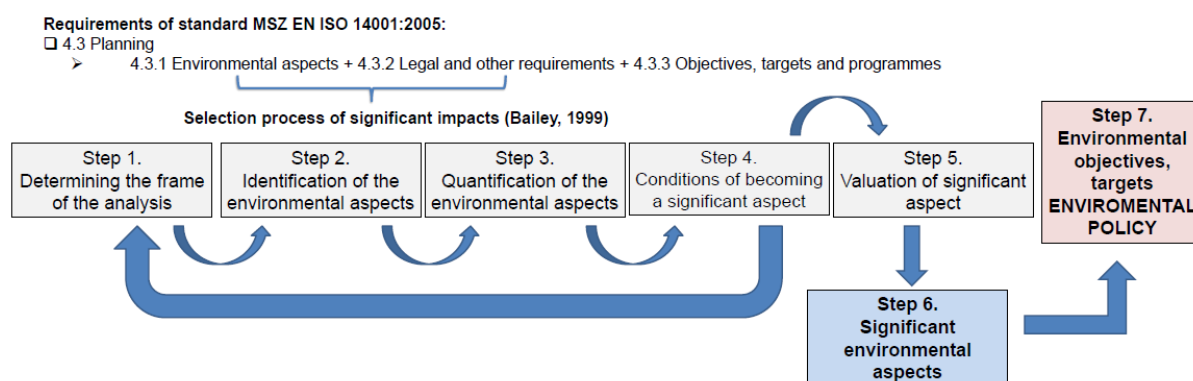


Figure 1. Requirements of the Plan phase and the process of selection of significant impacts in the standard ISO 14001 (Bailey 1999) (own design)

Our quantitative empirical research (2010–2011) has been conducted by using questionnaires in 114 multinational and domestic companies (sampling ratio: 9,89%) applying *EMS* according to the standard *ISO 14001*. The answers were controlled on the basis of the opinion of 10 certification companies (sampling ratio: 62,5%). The sample contained mainly medium-sized companies (55%), but in smaller part, small (13%) and large (18%) as well as micro-enterprises (8%) were represented.

Regarding the industrial classification provided, the following branches were represented mainly equally: metal industry, automobile industry, mining industry, health care, furniture industry, packaging industry, telecommunications, food industry, energy industry, forestry, manufacturing industry, service and trade, machine industry, chemical industry, waste management, waterworks, environmental protection, research and development, agriculture, plastics industry, printing industry, heavy industry, building industry, traffic, transport, glass industry.

In the sample of companies, energy and construction were represented in larger proportion; the organizations of waste management and chemical industry were present in moderate proportion.

Table 1 shows the regional distribution of the examined sample from the company universe, i.e. of the 1153 organizations certified by the international standard ISO 14001 (KÖVET EMS -Checklist 2007).

Table 1. Geographical distribution and proportion of the company universe and of the sample

Region	Company universe (number)	Proportion (universe) (%)	Company sample (number)	Proportion (sample) (%)	Sample ratio (%)
Foreign countries	3	0,26	9	7,89	300,00
Budapest	315	27,32	27	23,68	8,57
Middle-Hungary	113	9,80	12	10,53	10,62
West-Transdanubia	123	10,67	15	13,16	12,20
Middle-Transdanubia	143	12,40	15	13,16	10,49
South-Transdanubia	135	11,71	7	6,14	5,19
North-Hungary	90	7,81	8	7,02	8,89
North-Alföld	137	11,88	7	6,14	5,11
South-Alföld	94	8,15	6	5,26	6,38
ND	0	0,00	8	7,02	0,00
Total	1153	100,00	114	100,00	9,89

We analysed the general level and motivations of the environmental management of companies; the characteristics of the methodologies applied in environmental impact evaluation; questions relating EMS application and environmental objectives (integrated management, conflicts); the role of EMS in influencing the state of environmental elements; the specific environmental arrangements; and the main company efforts in operating of EMS.

In case of the main differential factors (customized solutions and purposefulness of EMS, application of EMS in the future, attitude of the senior management, year of initiation etc.) the 'best practices' could be filtered out by the processes accommodated to other parameters by strong organizations.

We counted the relevant *optimization parameters* detected in the course of the questionnaire survey for *indicators*. These indices indicated the *manner* of the application of the standard requirements, on the basis of which we *qualified* the efforts. By the *numerical qualification of the specific indices* we envisaged *evaluable developments*.

Besides the descriptive statistics (frequency analysis), we executed multivariable statistical evaluation of the data base of the questionnaire survey (correlation analysis, factor analysis by: varimax rotation and cluster analysis, by hierarchical average linkage clustering and K-means method).

For quantification we constructed performance indices by merging the connectable parameters. We aggregated the information accordant to the meaning of the indices. With the aim of detecting the correspondent variable groups, i. e. the dimensions of performance we applied principal component analysis (PCA).

On the base of the parameters influencing corporate EP, we created 4 corporate performance indices: environmental motivation (MOT), environmental performance (EPI), impact evaluation (EIE) and management (EMI) (applying the method of Pataki – Tóth, 1999).

For the indices we used the quantifiable variables. The structure of the created system and the point values were covered in 'index background tables' (Table 3). We accomplished

the description of the merged performance of respondents by defining a fifth, aggregative index (*AGG*).

By the created quantified index values, the post-development, relative evaluation of the corporate performance is uniformly executable, without intervention in the varied corporate processes.

In case of the created indices (answers: 'A' – unfavourable and 'B' – favourable group), we examined the performance of respondent organizations by sensitivity survey and histogram analysis depending on the main parameters. In the course of the sensitivity analysis of the indices, we interpreted the variables causing significant differences as development suggestions. The detected effects of parameters and the arrangements made for their improvement give the opportunity to estimate the fields of corporate development for the sake of improvement of *EP* in the course of implementation and operation of *EMS*. Some of the summary of the influences of the identified 36 development opportunities can be found in the 'Auxiliary Table' of *Table 4*.

The application of the background and auxiliary tables of indices opens up the opportunity for the expedient development of the performance and efficiency of the *EMS* 'Plan' phase. In order to support this, we elaborated a self-evaluation based *EMS* development model for the determination of most appropriate developments by organizations (*Figure 4*). With the help of indices, the efforts can be expressed in a quantitative way. The evaluation method identifies the weak and strong points, and determines the appropriate and effective developments, providing a decision support.

3 RESULTS

3.1 The main results of frequency analysis

We detected the efforts of the respondents according to the *EMS* operation. The efforts, examined by the function of the certain phases of *PDCA* cycle and the time, occurred at maximum frequency significantly in the 'Plan' phase (in 68% of the organizations). Increased activity occurred mainly regarding the environmental factors and environmental goals (32%), within the first three years from the implementation of *EMS*. The users were encouraged to significant and permanent efforts by the renewing objective system (18%) and the legal and other requirements (15%).

We have proved the importance of the environmental motivation (attitude) in the environmental impact based optimisation of *EMS*, as one of the determinants of the frame of impact evaluation.

Quantifiable benefits from the application of the *EMS* accrued at more than the half of the organizations (53%). The emergence of benefits had a favourable effect on the motivation of the organizations. It plays an indirect role in the environmental impact based optimisation of *EMS*.

We have concluded that the appropriate customization of *EMS* favourably developed the handling of environmental aspects/impacts.

We evaluated the application frequency of the additional corporate environmental management means playing a role in customization (*Figure 2*).

We have stated that techniques requiring profound environmental survey, considerable resources and efforts is still at low level in the *EMS* impact evaluation processes. We have demonstrated that concerning the methods applied in environmental impact assessment, mostly own company methodology (82%) was adopted. In case of the majority (70%) of the organizations the review of factors was required. We have found that certain corporate methods provide environmental information at low level.

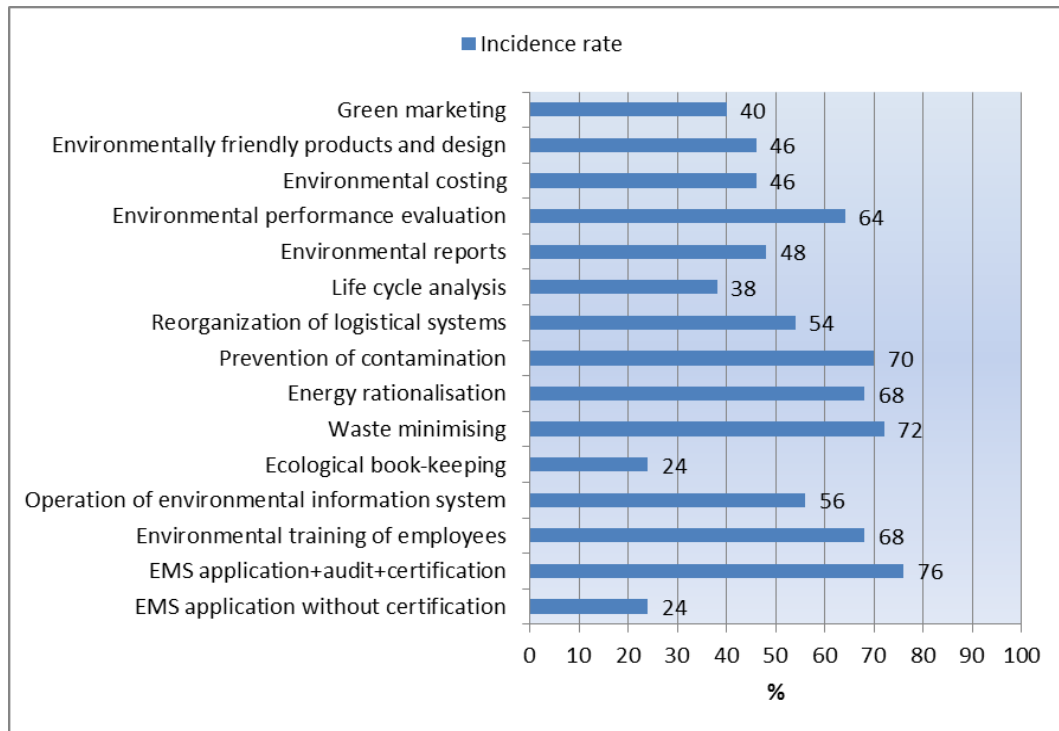


Figure 2. Application frequency of environmental management means in organizations (%)

Among the conditions of becoming significant factor, we identified the data, derived from the technological knowledge, as strong environmental information with regard to the detection and evaluation of the impact factors in the company practice. By this also the important criterions of legal and environmental science become strong aspects in the decision process. We mainly had available data related to the environmental impacts of technology, which we had found well covered in the corporate material and energy balances.

Realization effectiveness of objectives, compared to the envisaged ones, has brought slightly better results in the long-term (87%) than after the first EMS certification (79%).

We examined the progress of the facilitating/aggravating factors of the operation of EMS in the first three years, presented in Figure 3.

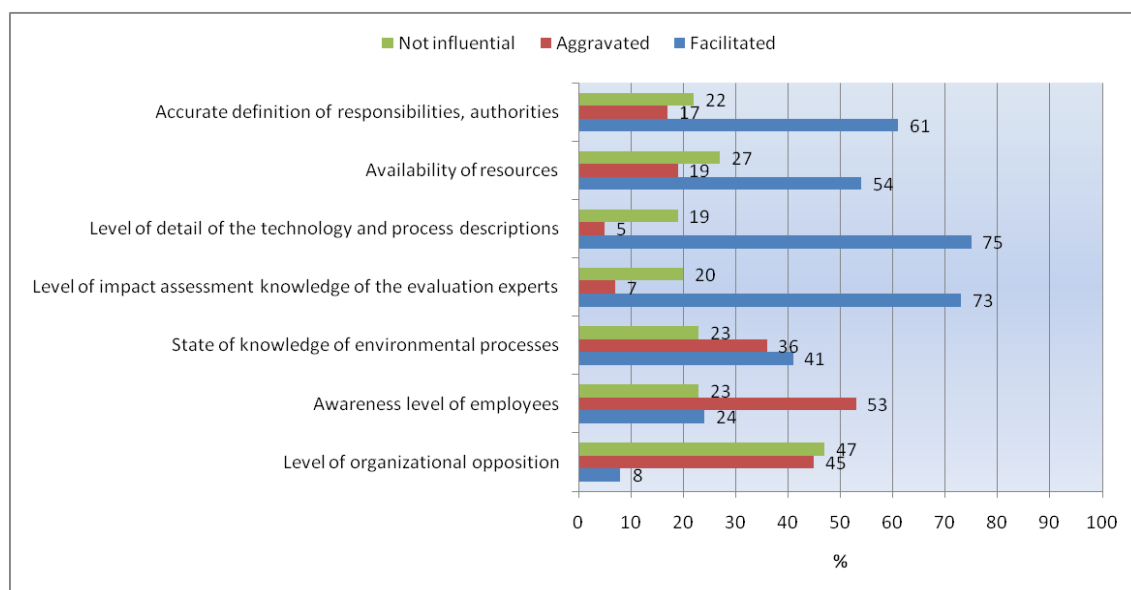


Figure 3. Influencing factors of the operation of EMS in the first three years

Regarding the role of *EMS* in influencing the condition of environmental components, a definitely strong positive influence (average value: 4,10; range: 1,00–5,00) can be noticed among those companies applying *EMS*.

3.2 Factor and cluster analysis

The reduced database of questionnaire survey was subjected to principal component analysis. The result of factor analysis indicated that the *EP* of the industrial companies performing in the survey and the effectiveness of *EMS*s can be explained and separated characteristically along six dimensions:

- factors of proactivity, verification of environmental impacts, adequate objectives and *EMS* procedure proved to be common principal components, while
- factors of exterior motivation (business partners) and interior audit occurred as specific indices.

As an auxiliary step of the survey, we executed the rotation recommended for validation. The Varimax rotation confirmed the above interpretation of the factor matrix.

By simplifying the dimensions of performance we have created a manageable structure eligible for further examinations. The dimensions are as follows:

- motivation for environmental protection
- environmental performance
- environmental impact evaluation
- environmental management.

On the basis of the results of the factor analysis, we have grouped the companies with cluster analysis. Firstly, we run a hierarchical cluster analysis, measuring the distance by average linkage clustering. The analysis has demonstrated 2 separated cluster structures. Following that, we carried out the K-means cluster analysis, where again 2 clusters appeared:

- 41 elements in the first cluster ('Formalists')
- the second cluster contained 73 companies ('Environmental performance oriented')

The result confirmed the opinion of Winter (1997), according to which the companies belong to distinct groups, the *formal* and the *EP-oriented* group. Thus, the optimisation of the application of *EMS* has the potential for the development of physical *EP* and a beneficial influence on the environment.

3.3 Summary of developments

3.3.1 Construction of performance indices

We have demonstrated that the improvement of physical *EP* can be executed through the development of the 'Plan' phase and through evaluation of the *EMS*. Our research has detected the factors and the characteristics of best practice which influences the result of the 'Plan' phase process directly and the whole *EMS* indirectly.

We have demonstrated that the relevant *EMS* optimisation variables affect the level of the 'Plan' phase and the *EMS* impact evaluation process. According to the meaning of the variables we executed their grouping (partial performance dimensions).

In order to characterise variable groups as dimensions, we constructed the following indices: environmental motivation (*MOT*), environmental performance (*EPI*), environmental impact evaluation (*EIE*) and environmental management (*EMI*). We have summarised the performance indices and the values of the company sample in Table 2.

Table 2. Data of constructed EMS performance indices

EMS performance index	Abbreviation	Number of variables	Index value (1,00–5,00)	Deviation
1. Environmental motivation index	MOT	15	3,14	0,74
2. Environmental performance index	EPI	6	3,49	0,66
3. Environmental impact evaluation index	EIE	16	3,09	0,61
4. Environmental management index	EMI	26	3,05	0,50
5. Aggregative index	AGG	–	3,20	0,20

The structure of each index is found in a background table (Table 3), which provides detailed, quantifiable information about the partial performance peculiar to the corporation.

Table 3. Example. Construction of the environmental motivation index (MOT)

Motivation topic	Variable	Evaluation
Motivation of environmental actions	External motivations <i>Strict regulatory system</i> <i>Expectations of banks and insurers</i> <i>Requirements of business partners</i> Expectations of competitors Market and customer demands <i>Strong influence of local population</i> <i>Civil organizations</i> Internal motivations <i>Expectations of the owners</i> Nature of product/service Expectations of the employees	yes = 5 points no = 1 point
Motivation implied by the quantifiable benefits	Quantifiable benefit	yes = 5 points no = 1 point
Motivation for the future application of EMS	Future application of EMS	essential = 5 points neutral = 3 points unnecessary = 1 point
Environmental awareness of the senior management in the determination of environmental objectives	Determination of the environmental objectives <i>Environmental awareness of the senior management</i> <i>Environmental strategy of the organization</i>	yes = 5 points no = 1 point
Motivation for the environmental purpose orders (in the last 3 years)	Order for environmental purpose	yes = 5 points no = 1 point

Variables in italics: parameter identified by correlation analysis; **variable marked in bold:** parameter with large principal component weight; non-marked variable: variable built in with process-oriented approach.

The index represents the following environmental motivations: extent of the environmental external-internal motivation, occurrence of the quantifiable benefits, approach for the future application of the EMS, environmental awareness of the senior management, environmental strategy of the organization and the orders for environmental purpose.

In order to weigh the variables, we could have used either the relevant variables of the correlation analysis on the basis of the equivalency ratios (classification factors) or the direct application of factor weights. The calculation of independent variables with smaller weight would not have been accurate, because by this we would have ignored the individual importance of the information content of the variables. We dispensed with these techniques the opinion of Miakisz (1999).

We chose the average of the variables as the appropriate method to calculate the values of the indices, in which we calculated the variables with equal weight.

We created the aggregative index (*AGG*) by averaging the values of the *EMS* indices, in order to express the result of the survey in one single number without dimension. The different sensitivity of the indices influences the *AGG* value. This effect is largely originating from the higher sensitivity of the *EPI* index. The more robust sensitivity of the *EMI* index results from the fact that the included variables are almost the twice of the variables of the other indices. *MOT* and *EIE* indices have normal sensitivity. The value of the aggregative index (*AGG*) was 3,20, i. e. average (range: 1,00–5,00; deviation: 0,20).

We developed an evaluation method to apply the indices, by which we have the possibility to rate the performance per dimension and the aggregate partial performance of the participants. Furthermore, the method enables intra-corporate self-assessment under certain conditions, additionally inter-corporate comparison concerning the survey period. We achieved this without modification of the processes identified in the organizations.

Performance indices were established per organization. In order to quantify environmental information we used the evaluation of each variable as a base (range of values: 1–5). By quantifying the information we gave the organizations the opportunity for self-evaluation. The results were usable for status review concerning each index and their variables. In the variable groups (in partial performance dimensions) we calculated the typical performance characterized by the index averages. This provided information about the efficiency of the ‘Plan’ phase development in the given period.

3.3.2 *EMS development model based on self-evaluation*

In the course of the sensitivity analysis of the indices, we interpreted the variables causing significant differences as development suggestions. We identified the potential result of the improvements from index averages. Targeted developments can be assigned to certain performance dimensions. To support the assignment process, we elaborated detailed auxiliary tables (*Table 4*). In case of the certain indices, we ranked the significance of the impact of *EMS* variable from 1 to 4. Finally we interpreted the differences observed in the aggregative index, as the complete, partial, specific or neutral speciality of the impact related to index dimensions. The ranking of the *EMS* variables was based on the differences of the average values experienced in the aggregative index.

To put our research achievements into practice, we evolved the self-evaluation based *EMS* development model (*Figure 4*).

Table 4. Example. Auxiliary table: Identified impact of EMS variables upon the indices

EMS variable	Impact of EMS variable					Ranking: difference experienced in aggregative index (B-A)
	MOT	EPI	EIE	EMI	AGG	
Application of environmental performance evaluation system	2	(1)	3	4	complete	0,7
Articulation of environmental objectives to the local significant aspects	2	3	(1)	4	complete	0,47
Importance of the future application of EMS	(1)	3	4	2	complete	0,46
Targetedness of EMS	2	(1)	3	4	complete	0,45
Extension of the data in the material and energy balance of the organization to the factors on which the organization has an expectable influence	1	3	4	(2)	complete	0,44
Environmental awareness of senior management in setting environmental objectives	(1)	3	4	2	complete	0,43
Application of impact register	4	(1)	3	2	complete	0,41
Customization of EMS	3	2	4	(1)	complete	0,4
Preventive approach in the documented environmental processes of the organization regarding the material/energy consumption and emissions	2	3	4	(1)	complete	0,35
Careful treatment in the documented environmental processes of the organization regarding the material/energy consumption and emissions	2	3	0	(1)	complete	0,51
Adequacy for legal requirement in the selection of significant environmental factors	2	0	(1)	0	partial	0,44
Environmental strategy of the organization in setting the environmental objectives	(1)	3	2	0	partial	0,43
Expectation of the owners	(1)	0	0	0	specific	0,43
Certification of the suppliers	0	(1)	0	0	specific	0,37
Recycling in the documented environmental processes of the organization regarding the material/energy consumption and emissions	1	0	0	(2)	partial	0,34
Application of LCA	3	(1)	2	0	partial	0,34

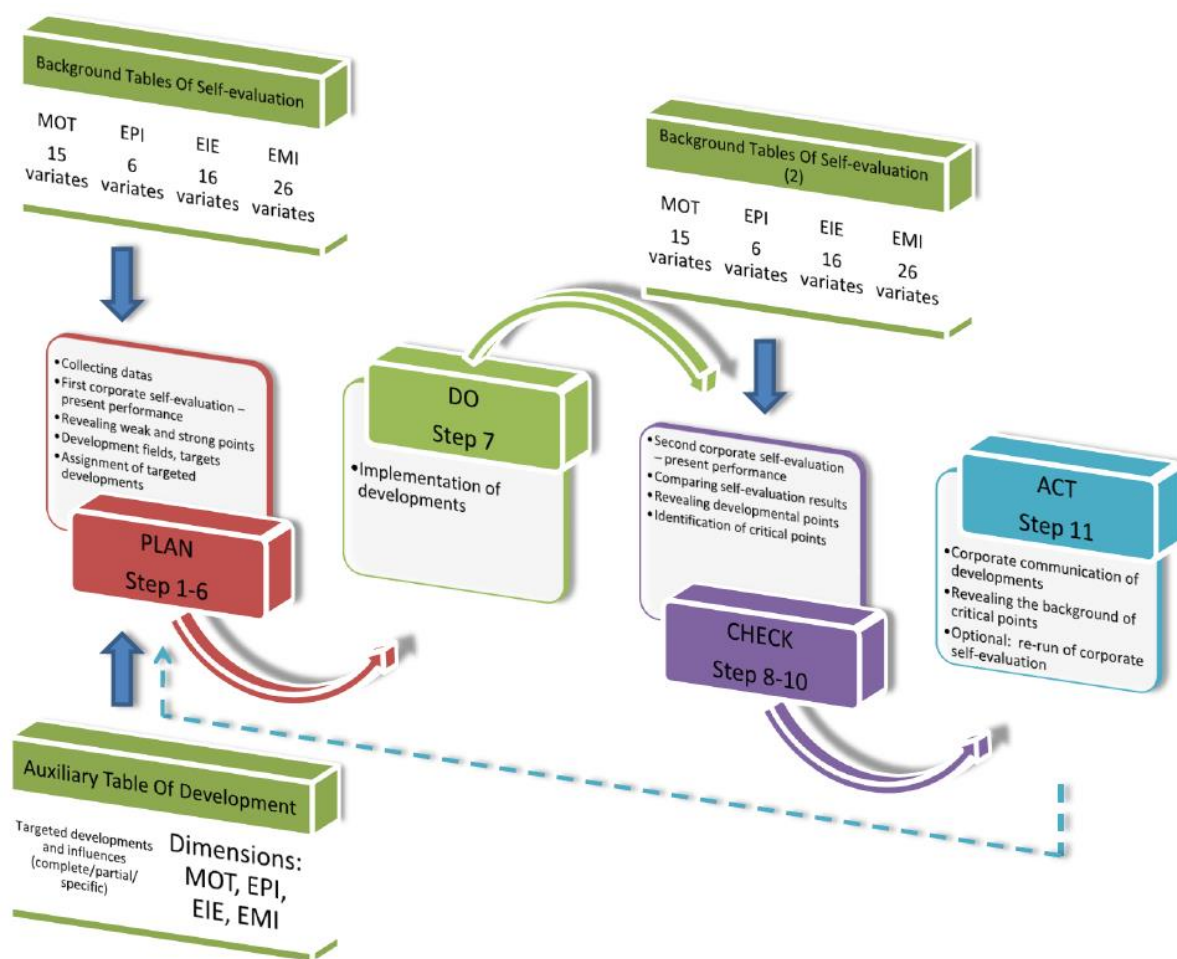


Figure 4. Model flowchart: the EMS development model based on self-evaluation for the 'Plan' phase of EMS according to the principle PDCA

Through the model, we created a system of correlations and formulated technical recommendations for defining and programming the targeted development tasks. This is a decision support tool (Step 1-11) for the continuous improvement of EMS, in the surveyed partial performance dimension according to the principle PDCA.

From Step 1 to Step 11:

I. 'Plan' phase of the model:

Step 1, START:

- **Function:** Study of the EMS performance indices (4+1 pcs) and their variables applied in the model in regard of the values definable by the organization. Collection of data.
- **Result:** Criterion: All of the EMS variables are evaluable concerning the organization: MOT (15 variables), EPI (6 variables), EIE (16 variables), EMI (26 variables), AGG.
Preparation of evaluation: background tables of the indices and their variables, development auxiliary tables. Collected environmental data of company.

Step 2:

- *Function:* First corporate self-evaluation by the indices meaning the performance dimensions and their valuable variables. Status review. Completion background tables.
- *Result:* First completed self-evaluation. Quantifiable values by variables and indices, as well as in case of aggregated index. Completed background tables. Registration of the certain environmental performance of EMS. (1,00–5,00).

Step 3:

- *Function:* Examination of the results of self-evaluation by variables and indices.
- *Result:* Detection of weak and strong points. Interpretation of the first self-evaluation of organization.

Step 4:

- *Function:* Analysing the manageability of the weak points.
- *Result:* Establishment of order of priority for the development of weak points.

Step 5:

- *Function:* Determination of development fields on the level of evaluated variables and indices (by priorities), application of background tables.
- *Result:* Development objectives set out concerning the certain variables and indices (by priorities).

Step 6:

- *Function:* Assignment of the relevant EMS variables relating to the selected development objective(s), forecast of their expected impact by using the auxiliary tables 1 and 2.
- *Result:* Development program: EMS variables assigned to the targeted development(s). Identified targeted development field(s) and expected impact(s).

*II. 'Do' phase of the model:**Step 7:*

- *Function:* Realising the development objective(s) according to the meaning of the EMS variable and in view of the expected impact.
- *Result:* Execution of development(s).

*III. 'Check' phase of the model:**Step 8:*

- *Function:* Second corporate self-evaluation by the indices meaning the performance dimensions and their valuable variables for the assessment of achievement(s). Completion background tables.
- *Result:* Second corporate self-evaluation. Quantifiable values by variables and indices, as well as in case of aggregated index. Completed background tables. Registration of the environmental performance of EMS. (1,00–5,00).

Step 9:

- *Function:* Comparison of the achievements of the targeted and realized development field(s). Controlling of the field and extent of development by variables and indices.
- *Result:* Interpretation of the second self-evaluation of organization. Comparison with the results of the first self-evaluation by variables and indices.

Step 10:

- *Function:* Detection and identification of development point(s). Determination of critical point(s).
- *Result:* Detected development and critical point(s).

IV. 'Act' phase of the model:

Step 11, STOP:

- *Function:* Inter-corporate communication of the realised development(s). Detection of the background of critical points. *Optional:* Re-run of the corporate self-evaluation after the carry out of the priorities based on the first self-evaluation.
- *Result:* Feedback to the 'Plan' phase (Step 1.).

4 CONCLUSIONS

The EMS impact evaluation process is one of the uppermost means of environmentally aware corporate management at the disposal of the organizations for developing their EP.

In certain cases, corporate methods are below the minimal requirements of the ISO 14001 international standard. They only provide environmental information at low level. The development of this situation and improvement of environmentally aware corporate management are key points in the course of improvement of physical EP of the EMS.

In the course of our methodical research, we have achieved a potential indirect development of the physical EP. The identified, potential development efforts affected the planning parameters pertinent to the treatment of the environmental aspects and impacts. We ensured the uniform evaluation of different organizations. It does not require the modification of the varied corporate processes, and provides the opportunity for comparison. The developed model is a development and decision support tool. Through applying the model, the organizations will be able to improve the efficiency of the 'Plan' phase and their environmental management system.

Acknowledgement: We express our sincere thanks to ass. prof. Dr. Botond Héjj CSc., Dr. László Tamaska, director, Dr. Olivér Bogdán, director and János Nagy, head auditor, who all assisted us with useful advice. Without the cooperation of the companies and certification authorities this work could not have been achieved.

REFERENCES

- BAILEY, A. (1999): Környezeti auditálás [Environmental audit]. In: BAILEY, A. – BEZEGH A. – FRIGYER A. – BÁNDI GY. – GALLI M. – KERÉKES S. – TÓTH G. (1999): Környezeti vezető és auditor képzés. [Training of Environmental Managers and Auditors] Magyar Szabványügyi Testület (MSZT), Budapest : 79–88. (in Hungarian)
- BRAGDON, J. H., MARLIN, J. A. T. (1972): Is pollution profitable? Risk Management, 19(4): 9–18.
- FOGLER, H. R., & NUTT, F. (1975): A note on social responsibility and stock valuation. Academy of Management Journal, 18: 155–160.
- FREEDMAN, M., – JAGGI, B. (1982): The SEC's pollution disclosure requirements – Are they meaningful? California Management Review, 24(2): 60–67.
- FRISCHKNECHT (2005): Methoden der Umweltbewertung technischer Systeme, Teil 1: Ökobilanzen (Life cycle assessment, LCA), ETH Zürich, Studiengang Umweltnaturwissenschaften, Sommersemester, Zürich
- HERCZEG, M. (2005): Környezetmenedzsment. [Environmental Management] Budapesti Műszaki és Gazdaságtudományi Egyetem Környezetgazdaságtan Tanszék. Budapest (in Hungarian)
- HOFSTETTER, P. (1998): Perspectives in Life Cycle Impact Assessment. A Structured Approach to Combine Models of the Technosphere, Ecosphere and Valuesphere. Kluwers Academic Publishers

- HOLMAN, W. R., NEW, J. R., & SINGER, D. (1985): The impact of corporate social responsiveness on shareholder wealth. In L. Preston (Ed.), *Research in corporate social performance and policy*, vol. 7: 137–152. Greenwich, CT: JAI Press.
- ISO 14001: Environmental management systems. Specification with guidance for use (ISO 14001:2004), Hungarian Standards Institution, Budapest, 2005
- ISO 14031: Environmental management. Environmental performance evaluation. Guidelines (ISO 14031:1999). Hungarian Standards Institution, Budapest, 2001.
- KEKEKES, S. – KINDLER, J. (eds.) (1997): *Vállalati környezetmenedzsment*. [Corporate Environmental Management] Budapesti Közgazdaságtudományi Egyetem, Budapest. (in Hungarian)
- KÓSI, K. – VALKÓ, L. (1999): *Környezetgazdaságtan és –menedzsment*. [Environmental Economy and –Management] Eötvös József Főiskola Műszaki Fakultás, Baja (in Hungarian)
- KÖVET Egyesület a Fenntartható Gazdálkodásért, KIR – lista [KÖVET Association for Sustainable Economies, EMS Check-list]. 2007
(On-line: <http://www.kovet.hu/ISO14001/Linkek/KIRnyilvantartas.htm>) (in Hungarian)
- KUN-SZABÓ, T. (1999): *A Környezetvédelem minőségmenedzsmentje*. [The Quality Management of Environmental Care.] Műszaki Könyvkiadó, Magyar Minőség Társaság, Budapest (in Hungarian)
- MIAKISZ, J. (1999): Measuring and Benchmarking Environmental Performance in the Electric Utility Sector: The Experience of Niagara Mohawk. In: BENNETT, M. – JAMES, P. (eds.): *Sustainable Measures*, Greenleaf Publishing, Sheffield, p. 221–245.
- NAGY, G. – TORMA, A. – VAGDALT, L. (2006): *A környezeti teljesítmény javítása és értékelése* [The Development and Evaluation of Environmental Performance]. Universitas-Győr Nonprofit Kft., Győr, (in Hungarian)
- PÁJER, J. (2011): *A környezeti terhelés minősítése*. [The Qualification of the Environmental Loads.] In: LAKATOS F., SZABÓ Z. (eds.): *Nyugat-magyarországi Egyetem Erdőmérnöki Kar Kari Tudományos Konferencia Kiadvány*. [Proceedings of the Scientific Conference of the University of West Hungary Faculty of Forestry] NyME Kiadó, Sopron, p. 14. (in Hungarian)
- PATAKI, GY. – TÓTH, G. (1999): *Vállalati környezettudatosság, GEMS-HU jelentés* [Corporates' Environmental Awareness, Global Environmental Management Survey in Hungary (GEMS-HU) Report], KÖVET, Környezettudatos Vállalatirányítási Egyesület, Budapest (in Hungarian)
- POLGÁR, A. (2011): *Környezetirányítási rendszerek hatáselemzésének vizsgálata*. Analysis of Impact Assessment of Environmental Management Systems.] In: *A Nyugat-magyarországi Egyetem Savaria Egyetemi Központ Tudományos Közleményei XVIII. Természettudományok 13. Supplementum – VI. Euroregionális Természettudományi Konferencia Konferencia Kiadványa*. NymE Kiadó. NymE-SEK-TTK: 163–168., Szombathely. ISSN 0864-7127, HU ISSN 2061-8336 (in Hungarian)
- POLGÁR, A. (2012): *Környezeti hatásértékelés a környezetirányítási rendszerekben*. [Environmental Impact Evaluation in the Environmental Management Systems]. Doctoral (PhD) Dissertation. Sopron, 380 p. (Online: <http://ilex.efc.hu/PhD/emk/polgarandras/disszertacio.pdf>) (in Hungarian)
- RÉDEY, Á. – MÓDI, M. – TAMASKA, L. (2002): *Környezetállapot-értékelés*. [Environmental State Evaluation] Veszprémi Egyetemi Kiadó. Veszprém, p. 8., 50. (in Hungarian)
- RÉDEY, Á. (2008): *Környezetmenedzsment rendszerek. A felsőoktatás szerkezeti és tartalmi fejlesztése*. [Environmental Management Systems. Structural and Material Development of the Higher Education] HEFOP 3.3.1-P.-2004-0900152/1.0. Veszprém, p. 24., 27., pp: 81–82. (in Hungarian)
- ROCKNESS, J., SCHLACHTER, P., & ROCKNESS, H. O. (1986): Hazardous waste disposal, corporate disclosure, and financial performance in the chemical industry. In M. Neimark (Ed.), *Advances in public interest accounting*, vol. 1: 167–191. Greenwich, CT: JAI Press.
- SAVAGE, E. (2000): MSV and public disclosure of performance goals are key agenda issues, *Chemical Market Reporter*, May 22, 2000, Vol. 257, Iss. 21, New York, p. 25.
- SEIFERT, E. K. (1998): Kennzahlen zur Umweltleistungsbewertung – Der internationale ISO 14031-Standard im Kontext einer zukunftsfähigen Umweltberichterstattung. In: SEIDEL, E. – CLAUSEN, J. – SEIFERT, E. K.: *Umweltkennzahlen*, Verlag Vahlen, München, p. 71–120.
- SPICER, B. H. (1978a): Investors corporate social performance and information disclosure: An empirical study. *Accounting Review*, 53: 94–111.

- SPICER, B. H. (1978b): Market risk, accounting data, and companies' pollution control records. *Journal of Business, Finance, and Accounting*, 5: 67–83.
- TORMA, A. (2007): A környezeti teljesítményértékelés aggregáló módszerei és az anyagáram-elemzés kapcsolatrendszere – Egy integrált vállalati modell megalapozása. Doktori értekezés [The Relationship Between the Aggregation Methods of Environmental Performance Evaluation and Material Flow Analysis. Establishment of an Integrated Corporate Method.] Doctoral (PhD) Dissertation. BMGE-GTK, Budapest. (in Hungarian)
(On-line: http://www.omikk.bme.hu/collections/phd/Gazdasag_es_Tarsadalomtudomanyi_Kar/2008/Torma_Andras/ertekezes.pdf)
- WINTER, G. (1997): Zölden és nyereségesen. [Green and Profitable.] Műszaki Könyvkiadó Budapest, (in Hungarian)
- WISEMAN, J. (1982): An evaluation of environmental disclosures made in corporate annual reports. *Accounting, Organizations, and Society*, 7: 53–63.

Introduction to Papers on Catchment Processes in Regional Hydrology: from Experiment to Modelling in Carpathian Drainage Basins

Regional understanding and modelling of hydrological processes in catchments is becoming increasingly essential for addressing questions in science as well as in practical water resource management questions. Evaluation of process representation in hydrological catchment models compared with results from modelling and catchment experiments has become therefore more important in recent years especially in the context of climate change.

Data availability and assimilation based on latest developments in remote sensing, experiments on hillslopes, and tracer studies in catchments gave hydrologists the opportunity to compare different models of the same type (e.g. distributed) or different types of models (e.g. distributed vs. lumped, process based vs. conceptual) on a regional basis. The new data also supports the study and generalisation of hydrological regimes. All these activities support better process representation in both deterministic and stochastic models in diverse hydrological environments.

In the series of similar symposia, the *International Symposium on Catchment processes in regional hydrology: from experiment to modelling in Carpathian drainage basins (Hydrocarpath 2013)* was organised by the Department of Water Management, at the Institute of Geomatics and Civil Engineering, Faculty of Forestry, at the University of West Hungary in Sopron, in cooperation with the Department of Land and Water Resources Management, Faculty of Civil Engineering, at the Slovak University of Technology in Bratislava. This conference welcomed contributions on hydrology which focus on the following issues: Presentation of results from catchments experiments leading to better process understanding and representations; Regionalisation and generalisation of hydrological regimes on various temporal and spatial scales using increased process knowledge; Comparison of similar model types as well as different model types (conceptual, process based, distributed, lumped); Soil, vegetation and atmospheric interactions especially focusing on forests. The texts of the presentations were published in a reviewed proceeding.

In cooperation with the editorial board, some authors were invited to submit their manuscripts to *Acta Silvatica & Lignaria Hungarica*. The papers were selected and reviewed by international experts in hydrological science mainly from the scientific committee of the conference, based on scientific excellence and relevance of the problem that was investigated. It is the expectation of the organisers that these papers will contribute to the better knowledge of the hydrology and catchment processes.

Zoltán Gribovszki
guest editor

Diurnal Method for Evapotranspiration Estimation from Soil Moisture Profile

Zoltán GRIBOVSKI^{*}

Institute of Geomatics and Civil Engineering, University of West Hungary, Sopron, Hungary

Abstract – Water use of plants is manifested in diurnal signal of soil moisture changes, and also in water table fluctuations in shallow water table environments. The signal can be especially strong in case of groundwater dependent forest vegetation with high water demand, where the water uptake is partly happening across the capillary zone. A new technique for water uptake estimation was elaborated on the basis of high frequency soil moisture profile data taking into account diurnally changing replenishment rates. The method is of great benefit to provide sufficient accuracy without soil specific calibration. The method was tested on the soil moisture dataset of a riparian alder forest in Hidegvíz Valley experimental catchment. Using this new method significantly higher and more realistic water uptake can be calculated compared to the traditional soil moisture method. The method is taking into account soil moisture replenishment from groundwater, which can provide a high portion (up to 90%) of evapotranspiration in dry periods. For the above mentioned reason the new technique is recommended to be used for evapotranspiration estimation in groundwater discharge areas, where the traditional methods and simple one-dimensional hydrological models are generally inaccurate.

diurnal signal / water uptake / replenishment rate / discharge areas

Kivonat – A talajnedvesség profil napi ingadozásán alapuló párolgásbecslő módszer. A növényi vízfelvétel hatása sekély talajvízű területeken megjelenhet a talajnedvesség és a talajvízszint napi ciklusú ingadozásában is. Ez az ingadozás különösen erős lehet a nagy vízigénnyel jellemezhető, talajvízfüggő erdőtüskés esztében, ahol a vízfelvétel részben a kapillaris zónán keresztül történik. A talajnedvesség nagy frekvenciás mérésén alapuló új vízfelvétel becslésére alkalmas technika került kifejlesztésre, amely napon belül változó talajvízutánpótlás figyelembevételével dolgozik. A módszer nagy előnye, hogy talajspecifikus kalibrálás nélkül is megfelelő pontosságot szolgáltat. Az új eljárás az Alpok keleti lábainál fekvő Hidegvíz-völgy kísérleti vízgyűjtőjében található vízfolyásmenti égeres talajnedvesség profil adatain került tesztelésre. Az új módszerrel lényegesen nagyobb és az adott körülményeknek pontosabban megfelelő vízfelvétel számítható, mint a tradicionális talajnedvesség mérésén alapuló módszerekkel. Az új eljárás a talajvízből táplálkozó talajvízutánpótlódással számol, ami igen jelentős részét (akár 90%) is képezheti a száraz periódusokban az evapotranszpirációnak. Az előbbi okból kifejezetten javasolt az eljárás a párolgás becslésére, a sekély talajvíztükörrel rendelkező talajvíz feláramlási zónákban, ahol a szokványos módszerek és az egyszerű egy-dimenziós hidrológiai modellek általában pontatlanul működnek.

napi ingadozás / vízfelvétel / utánpótlódás / feláramlási területek

^{*} Corresponding author: zgribo@emk.nyme.hu; H-9400 SOPRON, Bajcsy-Zs. u. 4.

1 INTRODUCTION

In Hungary the evapotranspiration (*ET*) is about 90% of the precipitation therefore it is a very important part of the water balance (it must be noted that globally “only” 62% of the rainfall is evapotranspired from the continents (Dingman 2002)). In spite of its significance, *ET* is treated generally as a lumped residual flux from a water budget of a watershed, or estimated from an energy budget using dataset of a local meteorological station. Nowadays researchers start to use remotely sensed data and hydrologic models to determine evapotranspiration in spatially distributed manner. Despite the developments in above mentioned methods, their application in shallow water table environments with mosaic land cover characteristic remains very limited (Nachabe et al. 2005).

In shallow water table environments transpiration of plant communities induce diurnal signal of soil moisture and water table (Gribovszki et al. 2010). These fluctuations are especially strong in arid and semi arid climate and can be detected mainly in groundwater discharge areas. Some researchers attempted to estimate *ET* rate of shallow groundwater areas with their own developed techniques (Bauer et al. 2004, Engel et al. 2005, Gribovszki et al. 2008, Loheide 2008, Nachabe et al. 2005, Schilling 2007, White 1932) using the observed groundwater or soil moisture fluctuations.

ET-induced diurnal signal is characterized by an early morning maximum and an afternoon minimum in the soil moisture (*Figure 1*) and also in groundwater level. In case of *ET* induced diurnal signal, a relationship can be detected between the daily courses of these values and that of the relative humidity, the latter mainly a function of surface irradiation at a diurnal time-scale. The direct driving force however is not radiation and relative humidity, but rather evapotranspiration (in forested areas the latter dominated by transpiration) regulated by the former variables as the plants use soil moisture or directly groundwater via their root systems.

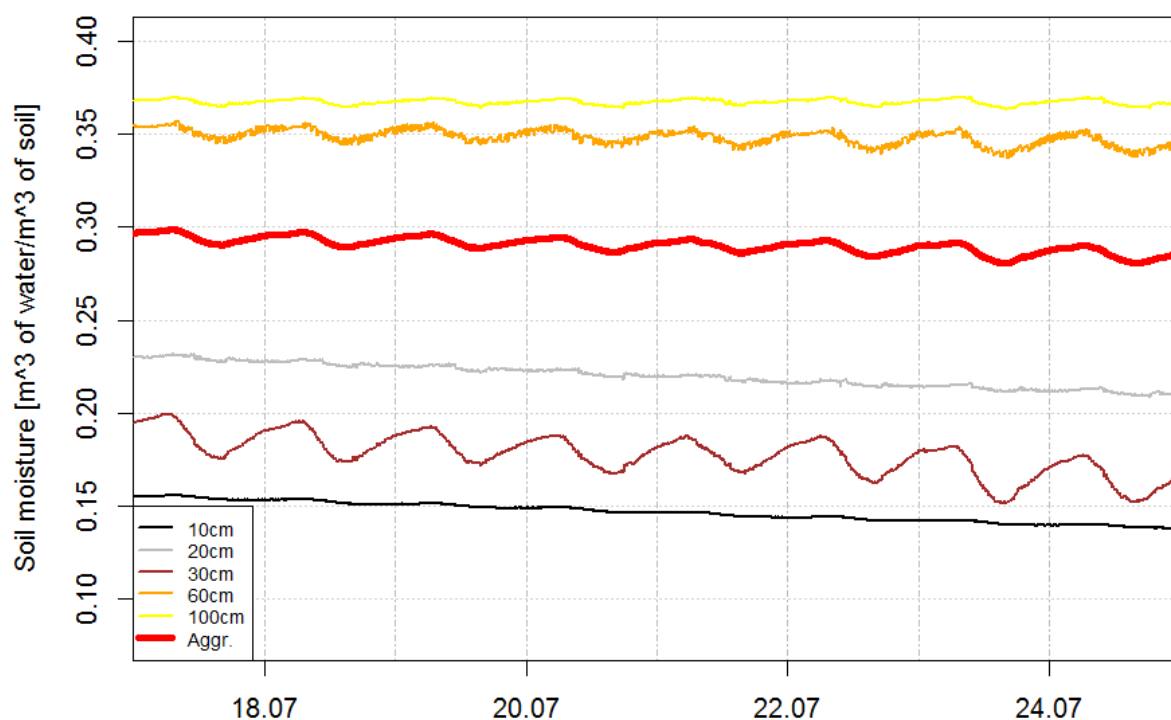


Figure 1. Diurnal signal in soil moisture profile
(Aggr. means total soil moisture for profile)

As first attempt White (1932) proposed a method that uses observations of shallow water table diurnal signal to calculate the groundwater uptake by plants. This method was widely used later for estimation of ET. The limitation of the former and of all groundwater signal based methods lies in the difficulty of specific yield estimation. Nachabe et al. (2005) adapted White's (1932) original method for high frequent soil moisture profile data to eliminate the application of the specific yield. With that method a grassland and a neighbouring forest evapotranspiration were successfully estimated. Nachabe's (2005) constant upwelling recharge rate of soil moisture profile was used throughout the day for his calculation. In this paper a new technique is demonstrated by which evapotranspiration values can be calculated from aggregated soil moisture taking into account diurnally changing replenishment rate.

2 MATERIAL AND METHODS

The dataset used for testing the new method originated from a valley position (*Figure 2*) of the Hidegvíz Valley experimental catchment in Hungary, located at the eastern foothills of the Alps close to Austro-Hungarian border in the neighbourhood of city Sopron.

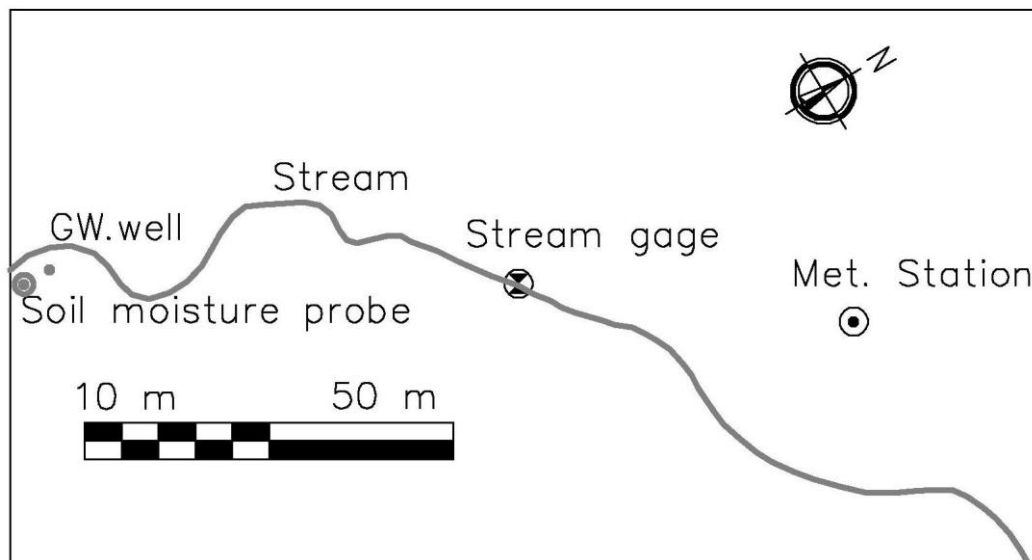


Figure 2. Location of the study site close to the outlet point of the experimental catchment at the eastern foothills of the Alps

The geological basis of the catchment is fluvial sediments deposited in five distinct layers (hundreds of meters thick) in the tertiary (Miocene) period on crystalline bedrock. On the surface only the two upper layers of the latter appear. Over the slopes and hilltops the strongly unclassified (coarse gravel and fine loam as well) formation is found in a 10–50 m-thick layer. In the valley bottoms, a finer-grained layer appears, which is a good aquifer, giving rise to perennial streams (Kisházi–Ivancsics 1985).

The soil type of the sampling point is loamy sand determined by grading test of the sampled soil profile.

The vegetation in the valleys is a typical phreatophyte intrazonal ecosystem dominated by alder (*Alnus glutinosa* (L.) Gaertn.). The mean height of the middle-aged riparian forest stand (where the sensors are located close to the outlet point of the experimental catchment) is about 15 m with a mean trunk diameter (at a height of 1.3 m) of 13 cm. Leaf area index (LAI) of this forest stand was approximately 7.

The area has a sub-alpine climate, with daily mean temperatures of 17 °C in the summer, 0 °C in the winter, and with an annual precipitation of 750 mm. In that region late spring and early summer are the wettest and fall is the driest seasons (Danszky 1963; Marosi–Somogyi 1990). Detailed characterisation of the research area can be found in Gribovszki et al. 2006.

2.1 Soil moisture data collection

A profile probe carrying six soil moisture sensor was installed in a riparian alder forest for soil moisture monitoring (*Figure 2*). Access tube was installed for probe and soil moisture sensors were distributed at 10, 20, 30, 40, 60 and 100 cm bellow the ground surface. Sensors work on capacitance principle and provide volumetric water content ranging from oven dryness to saturation with accuracy: $\pm 0.06 \text{ m}^3/\text{m}^3$. The default calibration equation provided by DeltaT company for profile probes were used in this study (<http://www.delta-t.co.uk/>). Soil moisture data were collected at each depth every 10 minutes.

The dataset of soil moisture sensors were used for estimation of total soil moisture of the soil column (1m soil profile) using the following equation:

$$\theta_T = \int_0^{1.0} \theta \cdot dz \quad (1)$$

where θ_T is total soil moisture (m), z is depth (m) below the ground surface, and θ is the water content (m^3 water in m^3 soil). Because there is no water content measurement at the ground surface ($z = 0$ depth), a uniform water content is assumed in the top 15 cm. Numerically the total soil moisture was calculated using the former approximation (1):

$$\theta_T = \sum_{i=2}^6 \left(\frac{z_{i+1} + z_i}{2} - \frac{z_i + z_{i-1}}{2} \right) \cdot \theta_i + \left(\frac{z_2 + z_1}{2} - 0 \right) \cdot \theta_1 \quad (2)$$

where z_i is depth (m) of the i -th sensor from the ground surface, and θ_i is the water content at the i -th sensor (m^3 water in m^3 soil). The total soil moisture data for a selected period can be seen on *Figure 1*. with red thick line (*Aggr.*).

A screened (screened to the bottom (1.6 m), starting 25 cm below the surface) groundwater well was also installed close to the profile probe. Water table (h) in the well was recorded by a pressure transducer at a 10-min sampling interval and with an accuracy of 1 mm (www.dataqua.hu). The well was dug with a 70-mm drill. The PVC well casing has a diameter of 50 mm.

Using groundwater well dataset it can be stated that depth to the groundwater in the riparian zone varied between 0.8 to 1.1 m during typical drought periods. Consequently, the root system of the trees is in direct contact with the saturated zone, or at least the capillary fringe throughout the year. Following Shah et al. (2007), the decoupling of the groundwater dynamics from the vadose zone in the soil of our experimental site was found to start at a depth of 0.8–0.9 m, therefore almost all year long the total ET is very close to groundwater ET .

2.2 Theoretical basis of the new method

The diurnal method for ET_{gw} (evapotranspiration from groundwater) estimation using groundwater level data developed by Gribovszki et al. (2008) can be applied also for soil moisture data after some modifications.

The basic expression is the water balance equation for soil moisture profile (3):

$$\frac{dS}{dt} = \frac{d\theta_T}{dt} = Q_i - Q_o - ET = Q_{net} - ET \quad (3)$$

where S is stored volume of water in the soil moisture profile in a unit area (m^3/m^2), which is the same as θ_T (total soil moisture) in this case (m), Q_i is the incoming and Q_o the outgoing water flux ($\text{m}^3/\text{s}/\text{m}^2$) to and from the soil column, $Q_{net} = Q_i - Q_o$ is the net flux/supply ($\text{m}^3/\text{s}/\text{m}^2$) or replenishment rate and ET is evapotranspiration ($\text{m}^3/\text{s}/\text{m}^2$).

The transpirational need of the vegetation is generally met by the soil moisture. In drought periods the soil moisture profile of the shallow water table areas used by evapotranspiration is typically replenished via groundwater flow or by so-called induced recharge. Around the timing of the soil moisture extrema, supply and demand are in an equilibrium, while along the rising limb of the soil moisture signal the ET rate exceeds the rate of replenishment (Q_{net}), and vice versa on the falling limb (Gribovszki et al. 2008, Troxell, 1936)

For estimation of Q_{net} water balance equation (3) for late night hours when ET is almost zero was used:

$$\frac{dS}{dt} = \frac{d\theta_T}{dt} = Q_{net} \quad (4)$$

In order to obtain the net supply rate (Q_{net}) a so called empirical submethod (after Gribovszki et al. 2008) is employed.

The maximum of Q_{net} for each day was calculated by selecting the largest positive time rate of change value in the total soil moisture ($Q_{net_max} = \max(d\theta_T/dt)$), while the minimum was obtained by calculating the mean of the smallest time-rate of change in θ_T taken in the predawn/dawn hours ($Q_{net_min} = \text{mean}(d\theta_{T_{predawn}}/dt)$). The averaging is necessary in order to minimize the relatively large role of measurement error when the changes are small. The resulting values of the Q_{net} extrema ("Characteristic points" in Figure 3) then were assigned to those temporal locations where the soil moisture extrema took place. It was followed by a spline (or when the data are very noisy a linear) interpolation of the Q_{net} values to derive intermediate values between the specified extrema (after Gribovszki et al. (2008), Figure 3.). For calculation of time-rate of change in soil moisture (soil moisture difference) 30 minutes time step was used.

Finally, when Q_{net} values have been obtained the ET rates of new method (ET_{new}) can be obtained by rearranging the former water balance equation as

$$ET_{new} = Q_{net} - \frac{d\theta_T}{dt} \quad (5)$$

30-min water uptake data were aggregated along the day to get daily ET_{new} .

Traditional ET calculation (ET_{trad}) from soil moisture data without replenishment is the following:

$$ET_{trad} = \theta_{Tj} - \theta_{Tj-1} \quad (6)$$

where: θ_{Tj} is a total soil moisture of an j -th day, θ_{Tj-1} is a total soil moisture of an $(j-1)$ -th day. This method is used for comparison with ET_{new} . It has to be noted that soil moisture difference in equation (6) is calculated for daily and not for 30 minutes time step compared to equations (3), (4) and (5).

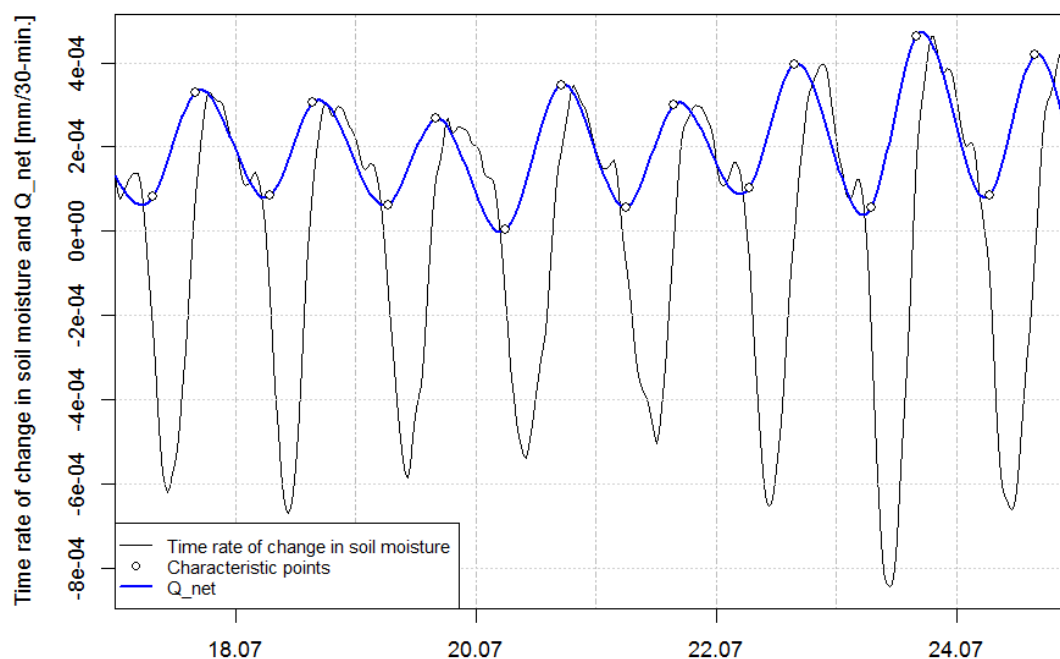


Figure 3. Graphical representation of the estimation method. See details in text.

3 RESULTS AND DISCUSSION

Figure 4 shows us daily ET_{new} values from June to September of 2013 for only dry days (daily rainfall is less than 5 mm). Mean average values for dry days of 2013 summer is 8.8 mm, a little lower in June and a bigger in July and August (Table 1). Daily water uptake seems to be great amount, but taking account that this is a groundwater discharge area in a valley bottom location (where positive groundwater flux toward to the unsaturated soil profile acts to support the high ET) and all around dry and warm environment can be found (therefore oasis effect can enhance ET) the data is acceptable.

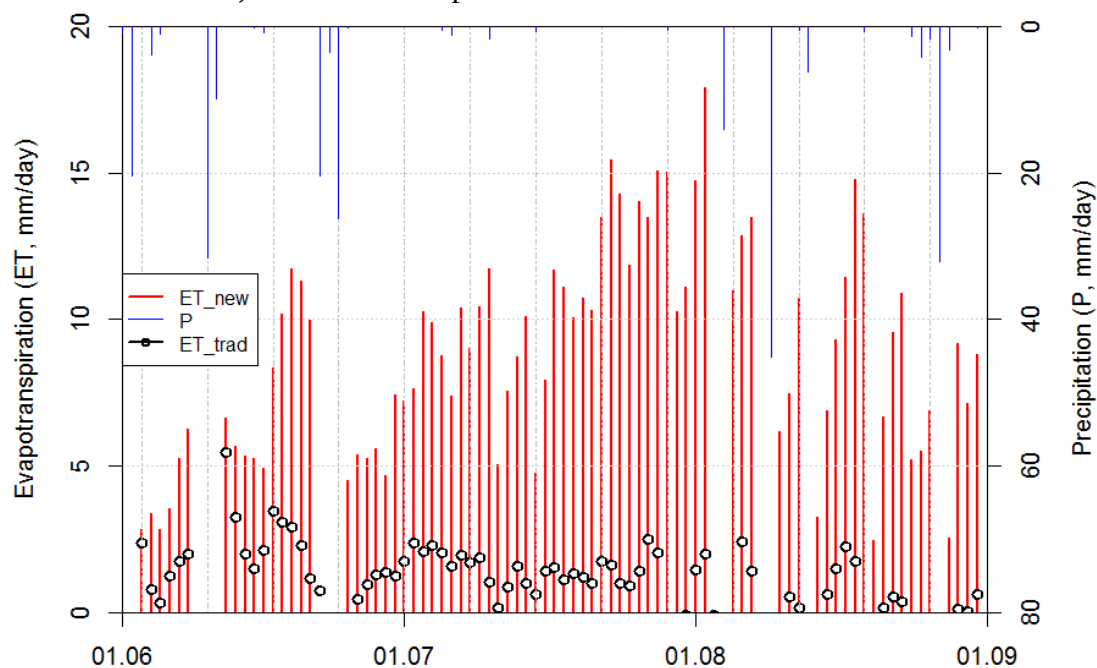


Figure 4. Daily ET values calculated by new (ET_{new}) and traditional (ET_{trad}) methods for dry days from June to August in 2013

If we compare ET values determined by traditional method (ET_{trad}) with estimates obtained by the new technique (Figure 4) a significant difference can be found. Mean average values of ET_{trad} for dry days of 2013 summer is only 1.50 mm, and a decreasing trend can be seen from data along summer (Figure 4 and Table 1). The diminishing of ET_{trad} values are caused by the almost continuous drying out processes of the soil profile parallel with the increasing importance of replenishment rate in real ET . The ratio of ET_{trad} and ET_{new} is about 20% and also generally decreased from June to August. This significant deviation between two methods is probably caused by the continuous water uptake from groundwater across the capillary zone which is not considered in traditional method.

Soil moisture replenishment from groundwater provided nearly 80% of the total ET represented by ET_{new} (Figure 5 and Table 1). For the visualization of seasonal trend of ET_{new} and replenishment rate (Q_{net}) a scatter-plot smoother (loess, Cleveland et al. 1992) was also applied on Figure 5. The data and the trends show us the importance of the net inflow rate, which was tendentially increased along the summer (from 60% of June to 88% of August, Figure 5). The values of the replenishment ratio can explain the difference between the traditional and new method (roughly 4/5 of ET is not detected when calculating ET by traditional method).

The higher positive correlation coefficient between ET_{new} – Q_{net} (0.92) compared to ET_{new} – ET_{trad} (0.12) also confirmed the significance of the replenishment rates in ET of the groundwater discharge areas and the inaccurate values of the traditional calculation.

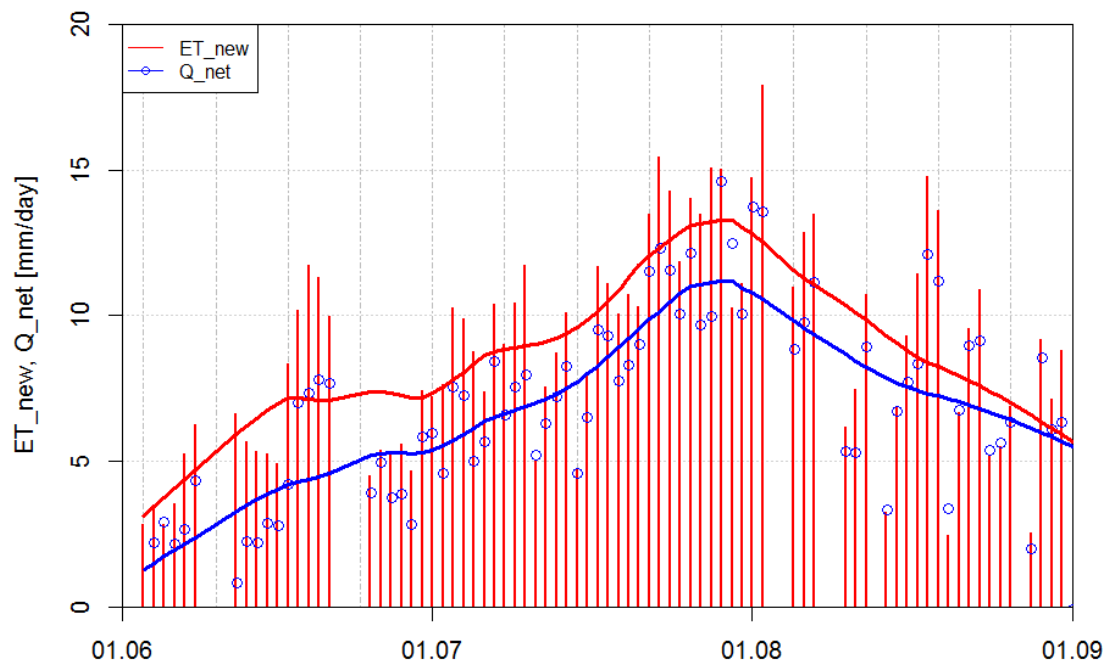


Figure 5. Daily ET_{new} values and replenishment rates (Q_{net}) for dry days with loess (local regression) smoothers for trend visualization from June to September

The magnitude of the soil moisture replenishment rate from below clearly illustrates the dependence of hygrophyte forests on groundwater. These groundwater discharge areas in Hungary can be found not only on the narrow bands of the valley locations in the mountainous and hilly regions (as our test area) but also on the broad lowland areas in Hungarian plains. Therefore for exact water uptake determination of high water demand forests located in groundwater discharge areas these kinds of methods are indispensable.

It can be also stated that hydrological models and methods, which ignore this above mentioned replenishment rate will estimate ET with big bias in groundwater discharge areas, and the magnitude of the bias can be 5–10 fold.

Table 1. Calculated monthly mean ET values and Replenishment rates (Q_{net}) for dry days of summer 2013

	June	July	August	June to August
ET_{new} (mm/day)	6.19 (2.61)	10.48 (2.78)	9.14 (4.04)	8.84 (3.61)
ET_{trad} (mm/day)	1.89 (1.19)	1.48 (0.56)	0.99 (0.82)	1.50 (0.93)
ET_{trad} / ET_{new}	0.33 (0.20)	0.15 (0.06)	0.08 (0.06)	0.19 (0.16)
Q_{net} (mm/day)	3.80 (2.22)	8.48 (2.56)	7.78 (3.07)	6.94 (3.28)
Q_{net} / ET_{new}	0.60 (0.27)	0.81 (0.12)	0.88 (0.14)	0.78 (0.21)

Standard deviations in brackets after each mean values

4 CONCLUSIONS

A new technique was elaborated using the diurnal signal of an aggregated soil moisture dataset. This method was successfully tested on the riparian soil moisture profile dataset in the summer of 2013. The water uptake values seem to be acceptable if oasis effect (Morton 1983) is taken into account in a well watered valley situation in a period when hot and dry environment can add significant amount of heat enhancing ET . Compared to traditional ET determination from soil moisture data, this new method gives much higher water uptake taking into account continuous soil moisture replenishment from shallow groundwater. The advantage of the new technique over the traditionally used method is that only a soil moisture profile dataset (down to the groundwater) is needed for calculation of both ET and replenishment rate and there is no need for specific soil calibration. However, future users of the new technique are cautioned, that the absolute value of ET is not available for the analysed period, thus nothing can be said about the real accuracy of the method. On the other hand the results obtained are promising and have potential benefits. As the climate changes, warmer and drier summer is forecasted. This hot and dry environment will significantly enhance the ET of the well watered areas, therefore this method can be a very useful technique for the more precise detection of impact of climate change on groundwater discharge areas.

Acknowledgements: The research of Zoltán Gribovszki was supported by the European Union and the State of Hungary, co-financed by the European Social Fund in the framework of TÁMOP 4.2.4. A/2-11-1-2012-0001 'National Excellence Program'.

REFERENCES

- BAUER, P. – THABENG, G. – STAUFFER, F. – KINZELBACH, W. (2004): Estimation of the evapotranspiration rate from diurnal groundwater level fluctuations in the Okavango Delta, Botswana. *Journal of Hydrology* 288 (3–4): 344–355.
- DANSZKY, I. (Ed.) (1963): Magyarország Erdőgazdasági Tájainak Erdőfelújítási, Erdőtelepítési Irányelvei és Eljárásai, I. Nyugat-Dunántúl Erdőgazdasági Tájcsoport [Regeneration and Afforestation Guidelines of Hungarian Forest Regions, I. Western-Transdanubian Forest Region]. Országos Erdészeti Főigazgatóság, Budapest pp. 557 (in Hungarian).

- DINGMAN, S. L. (2002): Physical Hydrology, Prentice Hall, Upper Sadle River, New Jersey.
- CLEVELAND, W.S. – GROSSE, E. – SHYU, W.M. (1992): Local regression models. In: CHAMBERS, J. – HASTIE, T. (Eds.), Statistical Models in S. CRC, pp. 309–376 (Chapter 8).
- ENGEL, V. – JOBBÁGY, E.G. – STIEGLITZ, M. – WILLIAMS, M. – JACKSON, R.B. (2005): The hydrological consequences of Eucalyptus afforestation in the Argentine Pampas. *Water Resources Research* 41. W10409. <http://dx.doi.org/10.1029/2004WR003761>.
- GRIBOVSKI, Z. – KALICZ, P. – KUCSARA, M. (2006): Streamflow characteristics of two forested catchments in Sopron Hills. *Acta Silvatica et Lignaria Hungarica* 2: 81–92. URL <http://aslh.nyme.hu/>
- GRIBOVSKI, Z. – KALICZ, P. – SZILÁGYI, J. – KUCSARA, M. (2008): Riparian zone evapotranspiration estimation from diurnal groundwater level fluctuations. *Journal of Hydrology* 349: 6–17 <http://dx.doi.org/10.1016/j.jhydrol.2007.10.049>
- GRIBOVSKI, Z. – SZILÁGYI, J. – KALICZ, P. (2010): Diurnal fluctuations in shallow groundwater levels and in streamflow rates and their interpretation – A review, *Journal of Hydrology* 385, 371–383, <http://dx.doi.org/10.1016/j.jhydrol.2010.02.001>.
- KISHÁZI, P. – IVANCSICS, J. (1985): Sopron Környéki Üledékek Összefoglaló Földtani Értékelése [Geological Assessment of Sediments in the Neighbourhood of Sopron]. Manuscript, Sopron, 48 pp. (in Hungarian).
- LOHEIDE, II. S. P. (2008): A method for estimating subdaily evapotranspiration of shallow groundwater using diurnal water table fluctuations. *Ecohydrology*, 1: 59–66, doi: 10.1002/eco.7.
- MAROSI, S. – SOMOGYI, S. (eds.) (1990): Magyarország Kistájainak Katasztere I. [Cadastre of Small Regions in Hungary I.]. MTA Földrajztudományi Kutató Intézet, Budapest, 479 pp. (in Hungarian).
- MORTON, F. I. (1983): Operational estimates of areal evapotranspiration and their significance to the science and practice of hydrology. *Journal of Hydrology* 66, 1–76.
- NACHABE, M. – SHAH, N. – ROSS, M. – WOMACKA, J. (2005): Evapotranspiration of two vegetation covers in a shallow water table environment. *Soil Science Society of America Journal* 69, 492–499.
- SCHILLING, K.E. (2007): Water table fluctuations under three riparian land covers, Iowa (USA). *Hydrological Processes* 21, 2415–2424. doi:10.1002/hyp6393.
- SHAH, N., – NACHABE, M., – ROSS, M. (2007): Extinction depth and evapotranspiration from ground water under selected land covers. *Ground Water* 45 (3), 329–338. doi:10.1111/j.1745-6584.2007.00302.x.
- TROXELL, H. C. (1936): The diurnal fluctuation in the groundwater and flow of the Santa Ana River and its meaning, *Trans.Amer. Geophys.Union* 17: 496-504.
- WHITE, W.N. (1932): Method of Estimating Groundwater Supplies Based on Discharge by Plants and Evaporation from Soil – Results of Investigation in Escalant Valley. Tech. Rep., Utah – US Geological Survey. Water Supply Paper 659-A.
- www.dataqua.hu
- www.delta-t.co.uk

Applicability of Different Hydrological Model Concepts on Small Catchments: Case Study of Bükkös Creek, Hungary

Péter TORMA* – Borbála SZÉLES – Géza HAJNAL

Department of Hydraulic and Water Resources Engineering,
Budapest University of Technology and Economics, Budapest, Hungary

Abstract – This study aims to test and compare the applicability and performance of two different hydrological model concepts on a small Hungarian watershed. The lumped model of HEC-HMS and the semi-distributed TOPMODEL have been implemented to predict streamflow of Bükkös Creek. Models were calibrated against the highest flood event recorded in the basin in May, 2010. Validation was done in an extended interval when smaller floods were observed. Acceptable results can be achieved with the semi-distributed approach. Model comparison is made by means of sensitivity analysis of model parameters. For TOPMODEL the effect of spatial resolution of the digital terrain model, while for HMS the complexity of the model setup was further explored. The results were quantified with model performance indices.

rainfall-runoff modelling / small watershed / TOPMODEL / HEC-HMS / model intercomparison

Kivonat – Különböző hidrológiai modellkonceptiók alkalmazhatósága magyarországi kisvízgyűjtőkön: esettanulmány a Bükkös-patak példáján. A tanulmány célja, hogy két különböző hidrológiai modell koncepció alkalmazhatóságát teszteljük és vessük össze magyarországi kisvízgyűjtők esetén. A koncentrált paraméterű HEC-HMS modellt és a térben félig osztott TOPMODEL-t alkalmaztuk a Bükkös-patak vízgyűjtőjének kifolyási szelvényében kialakuló árhullámok számítására. A modelleket az eddig mért legnagyobb, 2010. májusi árhullámra kalibráltuk. A validációt egy rövid, kiterjesztett időszakra végeztük, amikor kisebb árhullámok alakultak ki. A térben félig osztott megközelítéssel elfogadható eredményeket kaptunk. A modellek összehasonlítását érzékenységvizsgálat segítségével végeztük. A paramétereken túl, a TOPMODEL esetében a digitális terepmodell felbontásának, míg a HMS esetében a modell összetettségének hatását vizsgáltuk. Az eredmények értékelése a közismert, illeszkedés jóságát leíró paraméterekkel történt.

csapadék-lefolyás modellezés / kisvízgyűjtő / TOPMODEL / HEC-HMS / modell összehasonlítás

INTRODUCTION

An appropriate introspection into hydrological processes of small and medium sized mountainous catchments (up to 1000 m a.s.l.) of Hungary has become necessary due to a recent increase in flash flood events (Hegedüs et al 2013). It is especially challenging to predict floods (stage levels and discharge volumes) in data-poor catchments. In such environments adaptation of hydrological models can only be useful if they are robust for

* Corresponding author: torna@vit.bme.hu; H-1111 BUDAPEST, Műegyetem rkp. 3-9.

streamflow estimation (Gumindoga et al 2011). Due to the huge number of available hydrological models it is difficult to select the most effective one. Different model classifications exist (e.g. deterministic or stochastic etc.), but the most basic one concerns spatial structure. Lumped models handle the basin as one unit while fully distributed models solve equations on a finite number of discrete cells that cover the basin. In the latter case parameter values may vary in each computational point. Semi-distributed models do not calculate hydrological processes by cells but take into account the spatial variation of some characteristics of the watershed by dividing it into smaller homogeneous units (Beven 2001). Depending on their structural concept, rainfall-runoff (RR) models usually require at least half a dozen model parameters to be optimized. Robustness is difficult to ensure when a large number of parameters have to be defined. The optimization procedure requires as long a rainfall-runoff record as possible. With different parameter combinations, similar runoff values can be achieved meaning that a number of local minima exist in the parameter space with different interpretations of the modelled mechanisms (Duan et al 1992, Iorgulescu – Jordan 1994). Selection from these parameter combinations can be obtained with various hydrological and geographical analyses.

In Hungary little effort has been put into testing the applicability of different model concepts. Only a few studies report of successful applications of lumped RR models in small Hungarian watersheds (Hegedüs et al 2013, Koch – Bene 2013). This study aims to simulate streamflow during a large flood event in the small watershed of Bükkös Creek using two different RR models. The watershed of Bükkös Creek is data-poor, only a water level gauge has been in operation in it, which is typical in Hungary. The main goal is to test the applicability of two different model concepts and to estimate their robustness and sensitivity. A lumped (HEC-HMS) and a semi-distributed (TOPMODEL) models are implemented.

First, a one-dimensional hydrodynamic model of the main creek was set up to derive a reliable rating curve at the outlet cross-section of the watershed to transform stage records into runoff time series for the calibration and validation of the hydrological models. The already applied lumped model of HEC-HMS (Széles et al. 2012) fitted with a digital elevation model was successfully recalibrated and validated against corrected runoff data. The semi-distributed TOPMODEL has also been implemented, achieving better results throughout calibration and validation. Sensitivity study made the results even more reliable. The effect of digital terrain model resolution and the complexity of the hydrological model regarding the number of free parameters with different physical content were analysed. The results were quantified with well-known model performance tests.

1 STUDY AREA

The catchment is found south of the Danube's Bend in Hungary. The creek flows into the Danube at Szentendre, it is the largest permanent watercourse of the city (*Figure 1*).

The total area of the catchment is 39.2 km². The creek is 16 km long, having a constructed bed in the urban area protected by flood levees. It originates in the southern slopes of Dobogókő, nearly 600 m above m.s.l., where from through various waterfalls traversing a level difference of 500 m, arrives to downtown of Szentendre (*Figure 2*).

The aquifer is made up of andesite and andesite-tufa with a strongly watertight nature (due to the secondary porosity its hydraulic conductivity coefficient is about 10⁻⁷-10⁻⁸ m/s). Runoff fluctuates within a large range: enhanced discharge in spring when snow melts and in summer when flash floods dominate. The creek cannot form ponds along its course because the evolving hollows are quickly filled up with alluvium (Dövényi 2010).

As it is shown in *Figure 1* a water level gauge is operated at the border of the settlement. Water level is recorded in every 15 minutes since 2005 which is occasionally complemented with discharge measurement by the Water Directorate at low and medium waters. Hourly precipitation data were obtained from the Hungarian Meteorological Service. The rainfall gauge is operated about 10 km south from the watershed.

The basin is covered by forest above the gauge, the area of open fields is negligible. The topography of the catchment is displayed in *Figure 2*. Hydrological modelling tools require a structured grid, therefore from the manually digitalized contour levels a TIN model was created which was then interpolated onto structured grids. Digital terrain models were generated with four different horizontal resolutions: 25, 50, 100, 200 m.

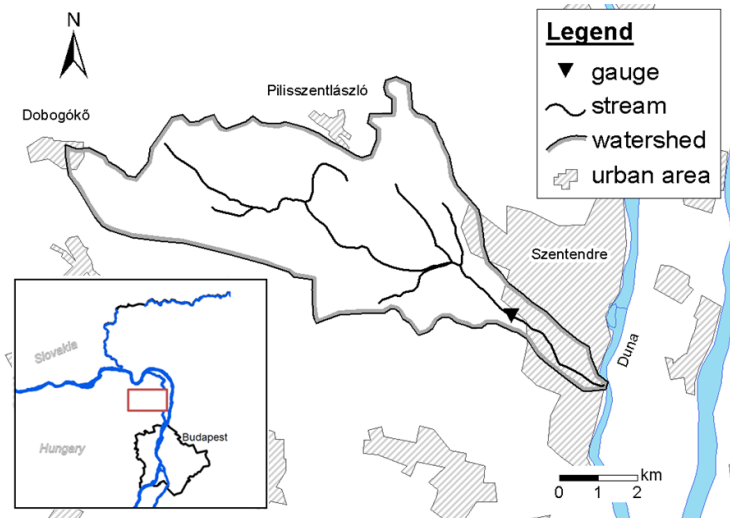


Figure 1. Location of the watershed of Bükkös Creek

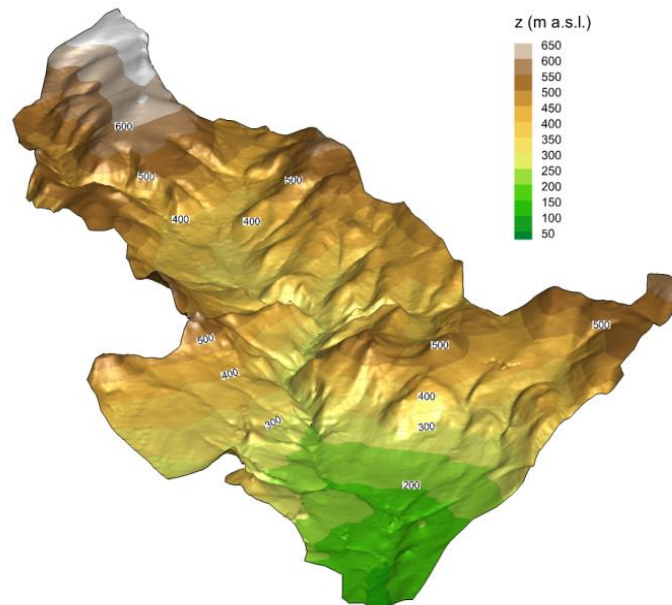


Figure 2. Digital elevation model of the Bükkös watershed derived from triangulation of contours

2 MODELS AND METHODS

2.1 1D hydrodynamic creek model

The one-dimensional (1D) hydrodynamic model of the main channel was based on the geodesic survey of the stream. The average density of cross-sections is about 20 m in the urban area and 100 m above the gauge in the rural area. Manning's roughness coefficient was neither horizontally nor vertically varied throughout calibration, channel and banks could have the same value along the stream because calculated water surface levels are affected mostly by the large slope of the water surface instead of friction caused by the channel's roughness. Sensitivity analysis performed with measured data verified this assumption.

The previously calculated rating curve, based on a simple curve fitting method (Széles et al 2012), was inaccurate due to extrapolation in the range of high waters. The 1D hydrodynamic model of the main channel generates reliable discharge time series from the water level measurements which also fit the measured low discharge data of the Central Danube Valley Environmental and Water Management Directorate. *Figure 3* displays the rating curves obtained by curve fitting and modelling. From the observed water levels discharge data of the flood event in May 2010 were recalculated with the new rating curve (*Figure 4*). This flood has been the greatest one measured since 2005, the calibration period of model analysis. The peak flow according to the rating curve derived from the 1D model is almost twice as large as the earlier extrapolated value.

Routing time of the watercourse was also calculated with the river model which meant to be an estimation of hydrologic response time of the watershed for severe thunderstorms.

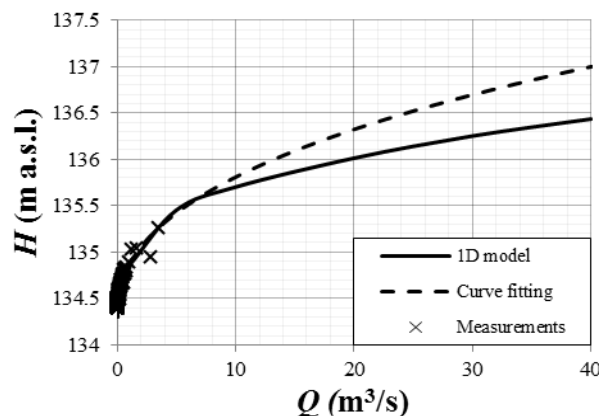


Figure 3. Rating curves calculated by 1D stream model and simple curve fitting

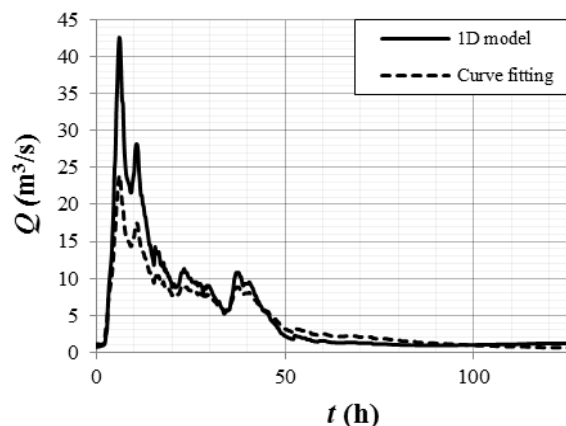


Figure 4. Discharge time series of the flood event in May 2010 derived by the rating curve of the 1D model as well as by simple curve fitting

2.2 Lumped model

HEC-HMS is designed to simulate the precipitation-runoff processes of dendritic watershed systems. The main components of the program are: basin and meteorological models, as well as input data and control specifications.

The basin model represents the physical watershed by adding and connecting hydrological elements. Three of them were used by us: watershed, reach and junction (USACE 2010). *Figure 5* shows the basin model of Bükkös Creek with three subbasins created by HEC-GeoHMS.

The meteorological model calculates the frozen or liquid precipitation and evapotranspiration. We dealt with only liquid precipitation. We assumed a homogeneous spatial distribution of rain in the meteorological model, because only one precipitation station was available. Hourly measured precipitation data and discharge data with a temporal resolution of 15 minutes constituted the input data pairs.

Models with three and five subbasins were calibrated and validated. Altogether ten free parameters were optimized: a specified amount of water remaining on the leaves of trees (*Canopy*), the sum of infiltration and precipitation left on the surface (*Loss*), surface runoff calculation (*Transform*), subsurface processes (*Baseflow*) and parameters of runoff time in channels (*Routing*). The total runoff time of the main creek was calculated by the 1D model and divided between branches in proportion of the length of each reach elements during the calibration of lag routing. The time between the centroid of precipitation mass and the peak flow of the resulting hydrograph was divided between each watershed in proportion of watersheds' area during the calibration of the *Transform* method.



Figure 5. Basin model of Bükkös watershed with three (left) and with five (right) sub-basins in the lumped model

2.3 Semi-distributed model

The geomorphology of the catchment plays an important role in runoff generation, especially in hilly terrains. Various approaches focus on different topographic characteristics. The geomorphologic unit hydrograph theory and the geomorphologic nonlinear-cascade (Szilágyi – Parlange 1999) concepts identify physical parameters from the drainage network, while in the concept of TOPMODEL by Beven and Kirkby (1979), topographic derivatives are the responsible hydrological drivers.

The concept of TOPMODEL (Beven – Kirkby 1979, Beven et al. 1984) was implemented in the watershed to model rainfall-runoff processes. Topography is represented in the model through the so-called topographic index, defined as $\ln(a/\tan \beta)$, where a is the total upslope contributing area, and $\tan(\beta)$ is the local downslope angle. The topographic index is used to estimate water table depths in any point of the catchment. Its distribution for the basin of Bükkös Creek is shown in *Figure 6*. The concept is based upon three main assumptions

(Beven 2001): (i) saturated zone is in equilibrium state due to the draining of the upslope contributing area, (ii) hydraulic gradient of the saturated zone is assumed to be equal with the topographic slope, (iii) the transmissivity with depth of the saturated zone is an exponential function of storage deficit. The semi-distributed feature arises from the assumption that areas with the same index value behave in the same hydrological manner. Originally TOPMODEL was developed for humid watersheds with thin soil but it has been used successfully in highly different circumstances, for instances in the Mediterranean (Candela et al 2005) or at the tropics (Plesca et al 2012). Topographic index can be derived from digital terrain models. GRASS, the free and open source GIS software was used to calculate index distribution in the catchment and as the run environment of TOPMODEL (GRASS 2012).

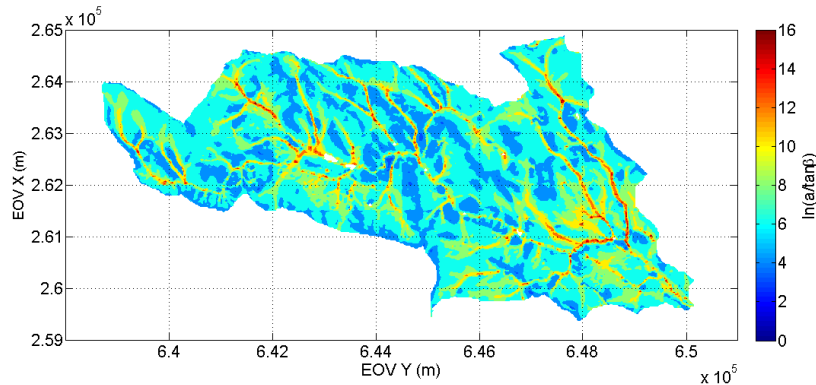


Figure 6. Topographic index distribution in the watershed with 25 m DEM resolution

2.4 Goodness of fit criteria

Quantifying goodness of fit between simulated and measured data during calibration, validation and sensitivity studies is important. Four statistical indices were used which are described in details in e.g. Das et al.(2008):

1) Nash-Sutcliffe coefficient (R_m^2):

$$R_m^2 = 1 - \frac{\sum_{i=1}^N (Q_s(t_i) - Q_0(t_i))^2}{\sum_{i=1}^N (Q_0(t_i) - Q_{0,a})^2}$$

where $Q_0(t_i)$ is the observed, $Q_s(t_i)$ is the simulated discharge at time step t_i , $Q_{0,a}$ is mean observed discharge and N is the number of time steps.

2) Relative bias:

$$Rel_{bias} = \frac{\sum_{i=1}^N Q_s(t_i) - Q_0(t_i)}{\sum_{i=1}^N Q_0(t_i)}$$

3) Peak error:

$$Peak\ error = \frac{Q_{s,max} - Q_{0,max}}{Q_{0,max}}$$

where $Q_{s,max}$ is the simulated and $Q_{0,max}$ is the observed peak discharge.

4) RMSE (Rout mean squared error):

$$RMSE = \sqrt{\frac{\sum_{i=1}^N (Q_s(t_i) - Q_0(t_i))^2}{N}}$$

3 RESULTS

3.1 Rainfall-runoff simulations

The same flood event was simulated with the two RR models providing comparability. The highest water levels ever recorded occurred during the flood event in May 2010 and caused significant damage in the town of Szentendre. Both models were calibrated against the observed discharge time series determined by the rating curve derived from the 1D model. To validate the models the calibration period was extended from April to June, when smaller flood-waves were observed.

Figure 7 illustrates observed runoff time series at the outlet with the simulation result of HEC-HMS lumped model for May 2010. The measured and simulated flood waves are in moderately good agreement. The magnitude and the phase of the peak are captured well, but the modelled wave is long-drawn, therefore the simulated runoff volume is remarkably overestimated (Figure 13). The model was validated on the extended interval for which a similar statement can be made (Figure 8). Calibration and validation accuracy was quantified with goodness of fit indices in Table 2.

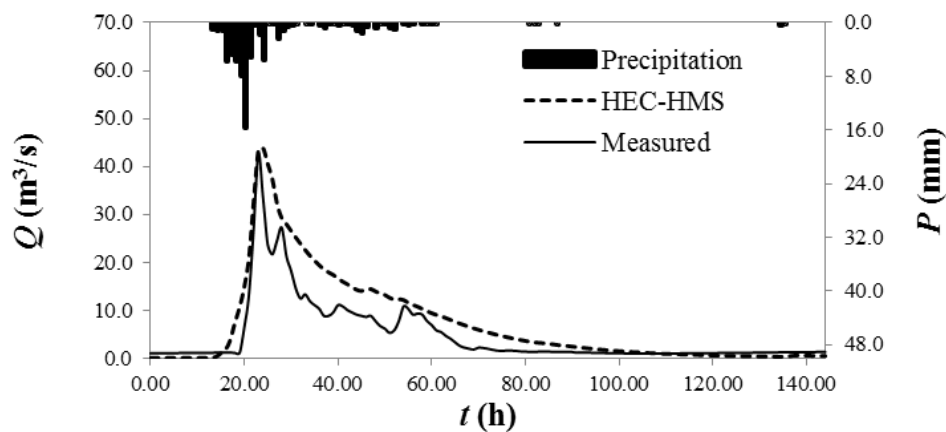


Figure 7. Observed and simulated runoff with HEC-HMS using three sub-basins for the calibration period

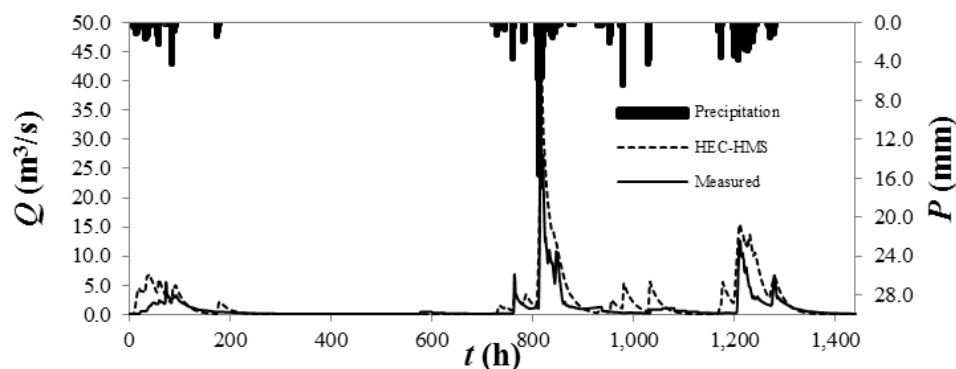


Figure 8. Observed and simulated runoff with HEC-HMS using three sub-basins from April to June 2010.

The results of the runoff simulation for TOPMODEL is shown in Figure 9. The calibration and validation periods correspond to the time intervals used before. The free model parameters are displayed in Table 1, although many of these were explicitly determined. Figure 10 shows the result of the validation (from April 2010 to June 2010).

Table 1 – Model parameters of TOPMODEL

Parameter	Dimension	Physical meaning
Q_0	(m/h)	Initial subsurface flow per unit area
$T_e = T_0$	(m ² /h)	Transmissivity of saturated soil
m	(m)	Transmissivity decline rate
Sr_0	(m)	Initial root zone storage deficit
Sr_{max}	(m)	Maximum available root zone storage deficit
t_d	(h)	Unsaturated zone time delay per unit storage deficit
v_{ch}	(m/h)	Main channel routing velocity
v_r	(m/h)	Internal sub-catchment routing velocity
nch	(-)	Number of sub-basins
d	(m)	Distance from outlet
Ad_r	(-)	Cumulative area ratio of sub-catchment

Table 2 demonstrates that prominently good results were achieved with TOPMODEL. Nash-Sutcliffe coefficient is close to 0.9 also for the validation period. Peak error for the calibration is of the order of two decimal places. Furthermore, the second peak is also appearing on the times series, although it is overestimated and occurs earlier. The simulated cumulative runoff volume is also approximated more accurately than in case of the lumped model.

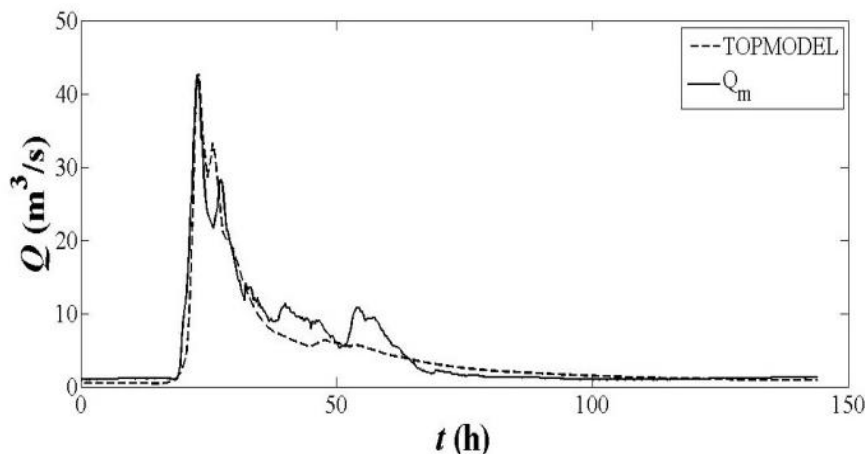
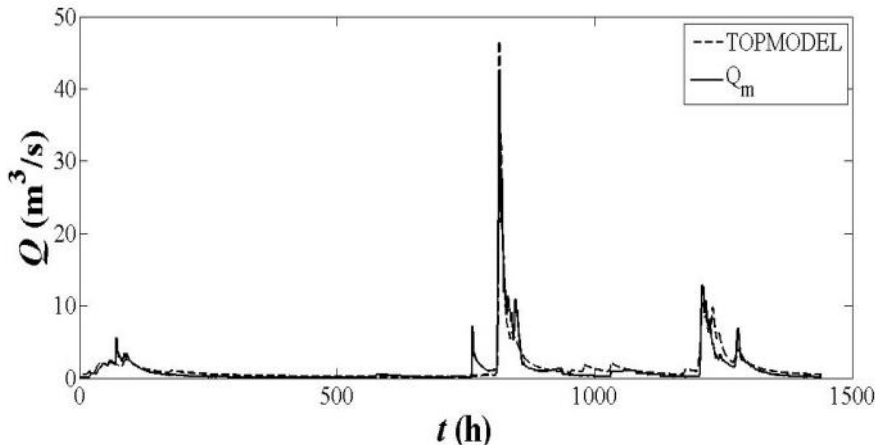
Figure 9. Observed (Q_m) and simulated runoff with TOPMODEL for the calibration periodFigure 10. Observed (Q_m) and simulated runoff with TOPMODEL from April to June 2010

Table 2. Goodness of fit indices, calibration and validation of TOPMODEL and HEC-HMS

Model	Type of simulation	Rel.Bias	R_m^2	Peak error	RMSE
HEC-HMS (3 subbasins)	Calibration	0.51	0.60	0.05	4.35
	Validation	0.75	0.38	0.06	2.22
HEC-HMS (5 subbasins)	Calibration	0.51	0.54	0.03	4.64
	Validation	0.75	0.36	0.05	2.26
TOPMODEL	Calibration	-0.0821	0.9077	0.0016	2.0841
	Validation	0.1653	0.8797	0.0978	0.9790

3.2 Sensitivity analysis

One of the main goals of this study is to explore robustness of model concepts. To this end, sensitivity analysis was performed. As it clearly seen from Table 2 and from the runoff time series, TOPMODEL performs considerably better. In the international literature many researchers work with HEC-HMS and even the previously mentioned Hungarian studies applied this lumped model (Széles et al 2012, Hegedüs et al 2013, Koch – Bene 2013), thus the sensitivity analysis focuses on TOPMODEL.

With HMS the modeller has to adjust the level of model's complexity during model building. In practice the number of sub-basins and consequently the number of side streams have to be decided. The amount of model parameters increases rapidly with sub-basins. In order to check the sensitivity of HMS for complexity, simulations were performed by delineating three and five sub-catchments. Remarkable differences in the results did not occur as it can be seen by the indices of Table 2. It was not possible to model the second peak of the main flood event of May by the more sophisticated structure.

In case of TOPMODEL, a more detailed investigation was performed. Sensitivity of the model parameters was analysed: the values were perturbed with $\pm 10\%$ (changing only one at a time) and the effects were measured through goodness of fit indices. The list of model parameters and their physical interpretation is specified in Table 1. According to Table 3, the most sensitive parameter was m which controls the rate of decline of transmissivity with increasing storage deficit, followed by T_e representing the transmissivity of the soil in saturated state.

Table 3 Results of the sensitivity analysis

Parameters	Rel. Bias	R_m^2	Peak error	RMSE
Calibration	-0.0821	0.9077	0.0016	2.0841
$m-10$ %	-0.0658	0.8653	0.3535	2.5169
$m+10$ %	-0.0994	0.8759	-0.2538	2.4162
$\ln T_e-10$ %	-0.0818	0.9146	0.0251	2.0043
$\ln T_e+10$ %	-0.0824	0.9006	-0.00075	2.1629
Sr_0-10 %	-0.0786	0.9083	0.0204	2.0768
Sr_0+10 %	-0.0857	0.9067	-0.0133	2.0955
$Sr_{max}-10$ %	-0.0821	0.9077	0.0016	2.0841
$Sr_{max}+10$ %	-0.0821	0.9077	0.0016	2.0841
t_d-10 %	-0.0820	0.9131	0.0230	2.0216
t_d+10 %	-0.0822	0.9006	-0.0114	2.1627

Further sensitivity analyses were performed with the two most sensitive parameters (m and T_e) in order to find those parameter pairs when the value of the NS coefficient has a local maximum (Figure 11). The results show that the calibrated parameters are not the optimal data pair in this aspect, however they are close to it and the aimed agreement is reached. Furthermore this method could be used to optimize model parameters.

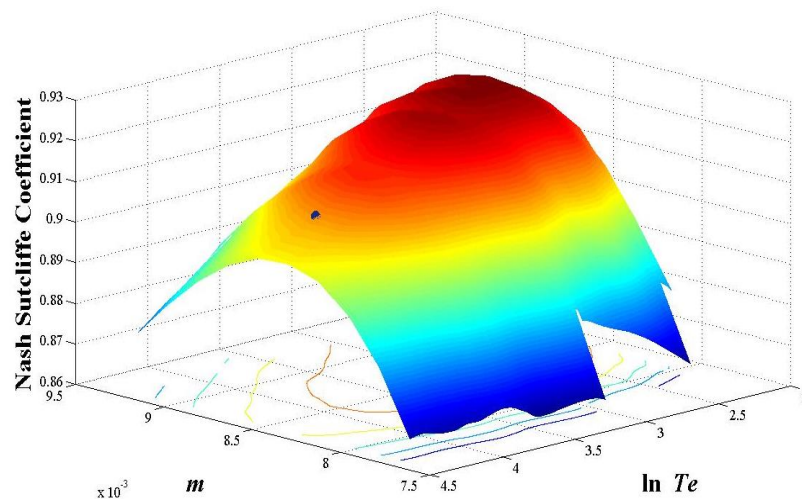


Figure 11. Sensitivity analysis of the two most sensitive parameters of TOPMODEL, a circle shows the applied parameter combination at calibration

As it was described in section 2.3, runoff generation in TOPMODEL is principally controlled by topography, hence the accuracy of the DEM has primary importance. Many researchers analysed grid size dependency of this concept (e.g. Lin et al 2010). Brasington and Richards (1998) showed that cell-size-independent results can be reached with about 100 m resolution. When using a finer DEM resolution, accuracy can be maintained by recalibration of the model. Effects of spatial resolution on model performance were analysed applying different grid size: 25 m, 50 m, 100 m and 200 m. Spatial resolution has direct influence on the topographic index (γ). Figure 12 shows the distribution of the topographic index under different spatial resolutions. Our aim was to find a mesh independent solution which has almost been achieved. The distribution of γ does not differ significantly using 25 m or 50 m resolution.

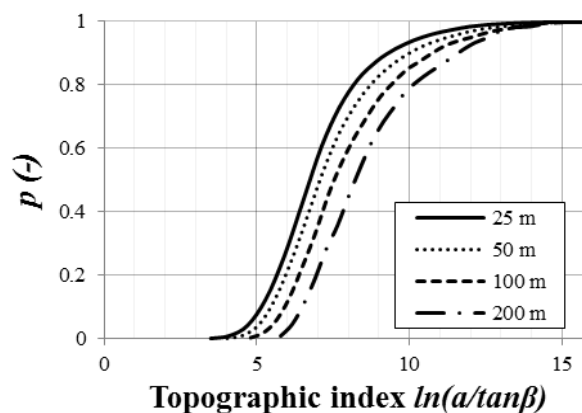


Figure 12. Topographic index distributions under different spatial resolution

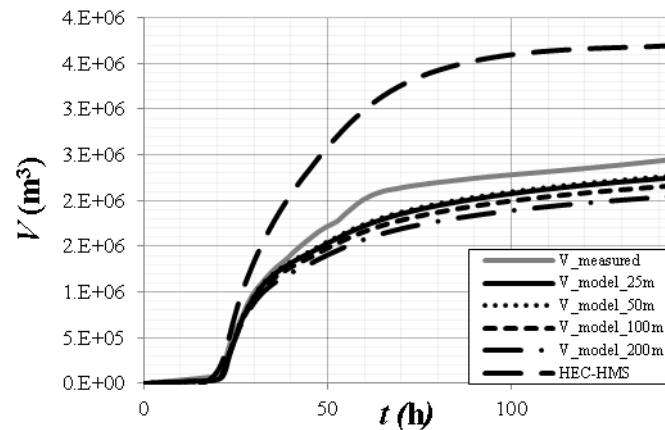


Figure 13. Cumulative discharge volumes in May 2010, under different DEM resolution (25, 50, 100, 200 m)

Recognizable differences can be discovered in the cumulative discharge volumes using digital terrain models with different spatial resolutions (Figure 13). Volumes with 25 m x 25 m and 50 m x 50 m grid sizes were almost the same, however differences were evident with a coarser resolution (100 m and 200 m). Changing spatial resolution of DTM influenced primarily the magnitude of the discharge peak value, the flood itself was not shifted in time.

3.3 Model comparison

One of the main purposes of this study is to compare the lumped and semi-distributed approaches as to their accuracy and applicability.

Probably the most important item in the comparison is model performance. It is clearly shown that TOPMODEL simulated the chosen flood wave with more accuracy. Not only its shape and the peak flow were well estimated, but the runoff volumes were also acceptable, which is not the case for HMS.

TOPMODEL uses only one hydrological approach, whereas HMS offers a broad range of hydrologic and hydraulic methods to describe watershed processes properly. This can be even disadvantageous if a robust tool is looked for since it is already challenging to select among the different approaches possessing parameters with different physical meaning.

The number of calibrated parameters was ten with HEC-HMS. By the lumped model the number of free parameters is increasing while the calibration process is getting more complicated by dividing the catchment into several sub-basins. In case of TOPMODEL, seven parameters have to be optimized, however we have found that the model was sensitive to only a few of them. This is partly due to the fact that some hydrological parameters are derived from the topography. For this reason this approach requires an accurate digital elevation model, but nowadays they are typically available. It can be stated that the semi-distributed model could be more easily calibrated.

Considering the availability of TOPMODEL and HEC-HMS, both can be legally and freely used. While for TOPMODEL model generation and simulations can be performed with the open-source GRASS-GIS software, the basin model preparation for HEC-HMS can only be realized with GeoHMS which is also free but works only as an extension of ArcGIS.

Input data format, data processing and run of TOPMODEL is similar to open source codes, results are not graphically displayed in GRASS, therefore separate scripts were coded for visualisation purposes. On the contrary HEC-HMS is more user-friendly with its graphical environment and detailed users' guides.

The complex HMS model can work with spatially inhomogeneous precipitation data. However the applied version of TOPMODEL was not able to use gridded precipitation data, however, this disadvantage can be easily eliminated throughout the open source nature of the tool.

Another advantage of the semi-distributed TOPMODEL concept is that saturated zones can be calculated from the outputs of the model and topographic index raster. *Figure 14* illustrates the simulated saturated zones at the moment of peak. These calculations were not validated with measured data. The results of model calculations can be correct in those areas where one of the preliminary simplifying assumptions of TOPMODEL is true: the downslope topographic gradient is assumed to be a good approximation of the downslope hydraulic gradient. This theory is certainly incorrect on a terrain with a major depression or deeper valley where changes in the surface of groundwater occur. After the saturation map is validated, it can be used e.g., to delineate borders of riparian zones. Verification can be made by extensive groundwater surface level registering. Such measurements in Hungary take place in the Hidegvíz Valley Forest Experimental Watershed (Gribovszki et al 2011), which is also a small, hilly catchment, where TOPMODEL may work properly.

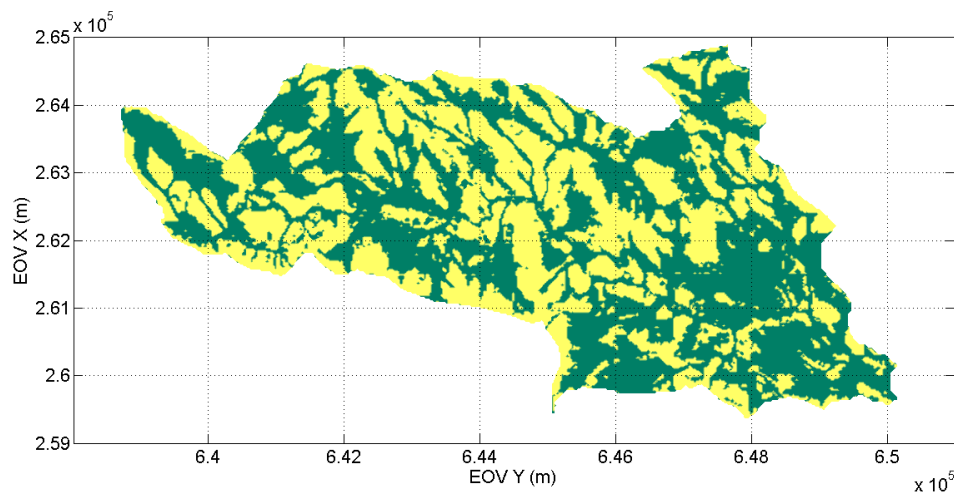


Figure 14. Snapshot of calculated saturated zones (dark green) at $t=23$ h, with 25 m spatial resolution

4 CONCLUSIONS

However numerous empirical formulas exist to describe rainfall-runoff processes, extreme circumstances of weather conditions and the lack of gauges in numerous Hungarian watersheds present an urgent need for a proper and reliable hydrologic modelling of the small and medium sized catchments in order to predict floods and discharge volumes.

Two rainfall-runoff models with different structures and complexity were tested in our case study for the watershed of Bükkös Creek: the lumped model of HEC-HMS and the semi-distributed TOPMODEL. Better results were achieved with the latter concept. The principal reason is the fact that the basic assumptions of the TOPMODEL concept were realized in the catchment, owing to a hilly terrain with a thin soil layer and underlain by andesite as an aquifer. Detailed sensitivity analysis of parameters was performed as well as the effect of DTM's resolution was explored.

The main purpose of this study is a comparison of modelling approaches, aided by the watershed of Bükkös Creek, to narrow the list of hydrological models which can be used to predict streamflows of small Hungarian catchments. The models were investigated with respect to performance and robustness. The main conclusions are the followings:

The lumped HEC-HMS model performance is not satisfactory. It is challenging to apply it in poorly instrumented catchments due to its many optional modules and parameters.

In contrast, runoff simulations made by the semi-distributed TOPMODEL are in good agreement with observations. The model possesses less sensitive parameters and seems to be more robust. It can be explained by the fact that the model builds on topography as the main driver of hydrological processes. The semi-distributed approach (not only TOPMODEL) is more promising than the lumped description as a streamflow prediction tool in small watersheds. Nevertheless, care must always be taken if model assumptions are met in the given watershed. Further investigations are required in various basins of the country to verify a more extensive applicability of TOPMODEL or other geomorphologic semi-distributed approaches.

Methods adopted in this study for the catchment of Bükkös Creek could also be applied in better instrumented watersheds, allowing for drawing similar conclusions and generalizations that could be extended to other ungauged watersheds.

REFERENCES

- BEVEN, K. J. (2001): *Rainfall-Runoff Modelling, The Primer*, John Wiley and Sons, LTD, Chichester.
- BEVEN, K. J. – KIRKBY, M. J. (1979): A physically based, variable contributing area model of basin hydrology, *Hydrological Sciences*, 24: 43–69.
- BEVEN, K. J. – KIRKBY, M. J. – SCHOEFFIELD, N. – TAGG, A. (1984): Testing a physically-based flood forecasting model (TOPMODEL) for three UK catchments, *Journal of Hydrology* 69: 119–143.
- BRASINGTON, J. – RICHARDS, K. (1998): Interactions between model predictions, parameters and DTM scales for TOPMODEL, *Computers and Geosciences*, 24: 299–314.
- CANDELA, A. – NOTO, L. V. – ARONICA, G. (2005): Influence of surface roughness in hydrological response of semiarid catchments, *Journal of Hydrology*, 313: 119–131.
- DAS, T. – BÁRDOSSY, A. – ZEHE, E. (2008): Comparison of conceptual model performance using different representations of spatial variability, *Journal of Hydrology* 356: 106–118.
- DÖVÉNYI, Z. (editor) (2010): *Inventory of microregions in Hungary*, Geographical Research Institute of the Hungarian Academy of Science, Budapest (in Hungarian).
- DUAN, Q. – SOROOSHIAN, S. – GUPTA, V. (1992): Effective and efficient global optimization for conceptual rainfall-runoff models, *Water Resources Research*, 28 (4): 1015–1031.
- GRASS DEVELOPMENT TEAM (2012): *Geographic Resources Analysis Support System (GRASS) Software*. Open Source Geospatial Foundation Project. <http://grass.osgeo.org>
- GRIBOVSKI, Z. – KALICZ, P. – SZILÁGYI, J. (2011): Numerical validation of diurnal streamflow-pattern-based evapotranspiration estimation method, *Acta Silvatica et Lignaria Hungarica*, 7: 63–74.
- GUMINDOGA, W. – RWASOKA, D. T. – MURWIRA, A. (2011): Simulation of streamflow using TOPMODEL in the Upper Save River catchment of Zimbabwe, *Physics and Chemistry of the Earth*, 36, pp. 806–813.
- HEGEDÜS, P. – CZIGÁNY, SZ. – BALATONYI, L. – PIRKHOFER, E. (2013): Analysis of soil boundary conditions of flash floods in a small basin in SW Hungary, *Central European Journal of Geosciences*, 5: 97–111.
- IORGULESCU, I. – JORDAN, J. P. (1994): Validation of TOPMODEL on a small Swiss catchment, *Journal of Hydrology*, 159: 255–273.
- KOCH, R. – BENE, K. (2013): Continuous hydrologic modelling with HMS in the Aggtelek Karst Region, *Hydrology*, 1 (1): 1–7.
- LIN, K. – ZHANG, Q. – CHEN, X. (2010): An evaluation of impacts of DEM resolution and parameter correlation on TOPMODEL modeling uncertainty, *Journal of Hydrology*, 394: 370–383.
- PLESCA, I. – TIMBE, E. – EXBRAYAT, J. F. – WINDHORST, D. – KRAFT, P. – CRESPO, P. – VACHÉ, K. B. – FREDE, H. G. – BREUER, L. (2012): Model intercomparison to explore catchment functioning: results from a remote tropical rainforest, *Ecological Modelling*, 239: 3–13.

- SZÉLES, B. – TORMA, P. – HAJNAL, G. (2012): Simulating the rainfall-runoff processes on the basin of Bükkös Creek, In: Proceedings of the conference on Catchment processes in regional hydrology: from experiment to modelling in Carpathian drainage basins, 28-30. October 2012, Sopron, Hungary, Paper 25.
- SZILAGYI, J. – PARLANGE, M. B. (1999): A geomorphology based semi-distributed watershed model, *Advances in Water Resources*, 23: 177–187.
- US ARMY CORPS OF ENGINEERS (2010): Hydrologic Modeling System HEC-HMS, User's Manual, Version 3.5, Hydrologic Engineering Center, Davis, CA, USA.

Forest Litter Interception Model for a Sessile Oak Forest

Katalin Anita ZAGYVAINÉ KISS* – Péter KALICZ –
Péter CSÁFORDI – Zoltán GRIBOVSKI

Institute of Geomatics and Civil Engineering, University of West Hungary, Sopron, Hungary

Abstract – Models that describe hydrological processes in forests may help to estimate the consequences of forestry interventions or of climate change. The authors employed a hydrologic model for estimation of forest litter interception of a middle-aged sessile oak (*Quercus petraea*) stand. Antecedent water content and the storage capacity of the forest litter were the main parameters of the model. The antecedent water content of the litter was estimated by the daily precipitation and temperature data, collected in Hidegvíz Valley research catchment in a three year measurement period (2006–2008). The measurements were done by an instrument of own development, where the undisturbed forest litter samples were enclosed in frames and measured in daily time steps.

interception model / forest litter / forest hydrology

Kivonat – Avarintercepció modellezése egy kocsánytalan tölgyesben. Az erdőben lezajló hidrológiai folyamatokat leíró modellek segítenek megbecsülni az erdészeti beavatkozások, és a klímaváltozás következményeit. Jelen munka egy hidrológiai modellel foglalkozik, ami egy középkorú kocsánytalan tölgy (*Quercus petraea*) állomány avarintercepcióját becsüli. Az avar megelőző víztartalma és tározási kapacitása a modell fő paraméterei. Az avar megelőző víztartalmát a napi csapadék és hőmérséklet adatokból becsültük, melyek a Hidegvíz-völgyi kísérleti vízgyűjtőből származnak a három éves mérési periódus időtartamára (2006–2008). Az adatgyűjtést saját fejlesztésű eszközzel végeztük úgy, hogy a bolygatatlan avarminták tömegét zárt keretekben napi gyakorisággal mértük.

intercepciós modell / avar / erdészeti hidrológia

1 INTRODUCTION

Forest litter interception is an important element of the water balance of the forest and can be an important parameter of the rainfall runoff models in a forested area. Forest litter interception has been dealt with since the middle of the last century but it has been the focus of research only in recent decades.

Ijjász (1936) examined the role of forest litter in the water balance of a forest in Hungary. He focused on the volumetric water content proportion of the three litter sub-layers (litter, fermentation and humus layers). Helvey (1964) investigated the forest litter interception in a southern Appalachian hardwood stand. Monthly values of litter interception and water content

* Corresponding author: zagyvaine@emk.nyme.hu; H-9400 Sopron, Bajcsy-Zsilinszky utca 4.

of litter after rainfall were measured. According to Helvey (1964), litter interception depends mainly on the annual quantity of forest litter.

Führer (1994) calculated litter interception values for the growing and dormant seasons using data of small lysimeters, for determination of water retention of tree stands in Hungary. In their forest litter interception research, Putuhena and Cordery (1996) did not make a distinction between parts of the living and dead plants. All of the organic materials were involved in the study which was a maximum 50 cm above the soil surface. Wang and Weng (2002) analysed the role of litter, the water retaining capacity of litter and the influencing factors (amount of litter, decomposition stage, tree species, amount of rainfall, and topography) were evaluated related to soil protection and erosion. Sitkey (2006) dealt with the full interception loss in connection with water balance investigations in forest climate zones (from forest beech climate to forest-steppe zones) in Hungary. Gerrits et al. (2006) continuously measured litter interception as a parameter of runoff models using a new technique of measurement in a beech (*Fagus sylvatica*) stand. Bulcock and Jewitt (2012) gave canopy and litter interception values as components of a forest hydrologic cycle in three different tree species in Africa: flooded gum (*Eucalyptus grandis*), spreading leaved pine (*Pinus patula*) and Australian acacia (*Acacia mearnsii*). For forest litter interception, there are different results (usually 2–12%) in proportion to the gross precipitation due to the different climate (rainfall and evaporation conditions), measurement methodology, litter weight and tree species.

2 DEFINITION OF INTERCEPTION

A part of the gross precipitation (P) falls through the canopy (T) and reaches the forest litter. After saturation of the leaf storage capacity, another part of the precipitation, drips down from the canopy (D), adsorbs on leaves and partly evaporates during and after the rain event (E) or flows down the trunk (stemflow: SF) (Horton 1919; Delfs 1955). That can be symbolized by with the next equation:

$$P = T + D + SF + S + E \quad (1)$$

The interception loss (I) is that part of precipitation which does not reach the soil (Leonard 1967):

$$I = S + E \quad (2)$$

Interception in a forest has two main parts: canopy and litter interception. Forest litter interception is the difference between the stand and effective precipitation:

$$E_S = P_{atot} - P_{eff} \quad (3)$$

where $P_{atot} = T + D + SF$, P_{eff} is the effective precipitation which can infiltrate into the soil (Lee 1980).

The canopy and also the litter interception processes can be described by the saturation function, because leaves cannot store more moisture after reaching their storage capacity. Drying of the canopy is faster due to the less saturated and more turbulent environment of the leaves than the litter, where the air is much closer to saturation and the stratified leaves keep the moisture longer. There is an additional difference between the two processes that the canopy leaves characteristically are wetted only on the surface, but the leaves of the litter store the water inside of them due to their composited structure.

However, due to the similarity of the two processes, canopy interception models can be a good starting point for employing litter interception functions. As an example, the Merriam (1960) formula for canopy interception can be a good basis for a litter interception model:

$$E_{su} = S \cdot (1 - e^{-c \cdot P}) + K \cdot P \quad (4)$$

where E_{su} is the canopy interception (mm), S is the storage capacity (mm), c is a constant (without dimension), P is the gross precipitation (mm) and K is the rate of the evaporation under the precipitation and the gross precipitation. The first component of the equation is the wetting up of canopy and the second component is the evaporation.

There is an essential difference between the forest litter and canopy interception. The quantity of the water storage of the leaves (the amount of adsorbed water, not on the surface of the leaves) can be disregarded in the canopy interception. In the forest litter interception, litter stores water not only on its surface but precipitation also can infiltrate into the body of the litter layer. Forest litter rarely dries out entirely during the rainless period between two precipitation events. Therefore the stored volume of water in the litter layer is never zero. This means that the actual storage capacity never reaches the total storage capacity. Thus, if the water content is high, the current storage capacity is low. This relation is described by the equation which is developed in this paper (Eq. 5):

$$E_s = (S - w_{(i-1)}) \cdot \left(1 - e^{-\left(\frac{Th}{(S - w_{i-1})} \right)} \right) \quad (5)$$

where $w_{(i-1)}$ is the antecedent water content (mm).

Therefore Eq. 5 is the Merriam equation completed with the antecedent water content, which reduces the maximum storage capacity to the current storage capacity. The second evaporation term from the original equation is neglected, because the evaporation can be disregarded under the canopy near the soil surface during the rainfall event in those closely saturated conditions of air.

3 MATERIAL AND METHODS

A new instrument has been developed for measurement of forest litter interception. This method supports the data collection, eliminating the subjectivity of the observer compared to traditional methods (Helvey 1964). Thus consecutive data can be compared with each other. Ten frames (50 cm wide and 50 cm long, 0.25 m² in area) were settled in the forest stand following the contour lines and slopes (5–5 pieces). The frames are covered with fly screen on each side (and also on the top) so the movement of any insect, snail, etc. does not disturb the measurement. Quasi-undisturbed litter was placed into these frames from the same area as the frames. Before starting the measurements, the frames were uncovered for 1 or 2 weeks in the field to allow precipitation to settle the litter leaves.

We applied an UWE HS-7500 digital hanging scale with 5 g accuracy (www.uwe.com) for weighing the forest litter.

Measurements provided data each day, from May to November/December in every study year (05/05/2006–14/12/2006, 10/05/2007–14/12/2007, and 28/05/2008–29/08/2008).

At the end of each study year, the dry weight can be determined in each frame. Dry weight values support the calculation of the litter water content at each time. After the measurement period (according to the dates above, usually one growing season), the frames

were emptied. The next measurement period was started with new litter samples. A measuring period is represented by Figure 1.

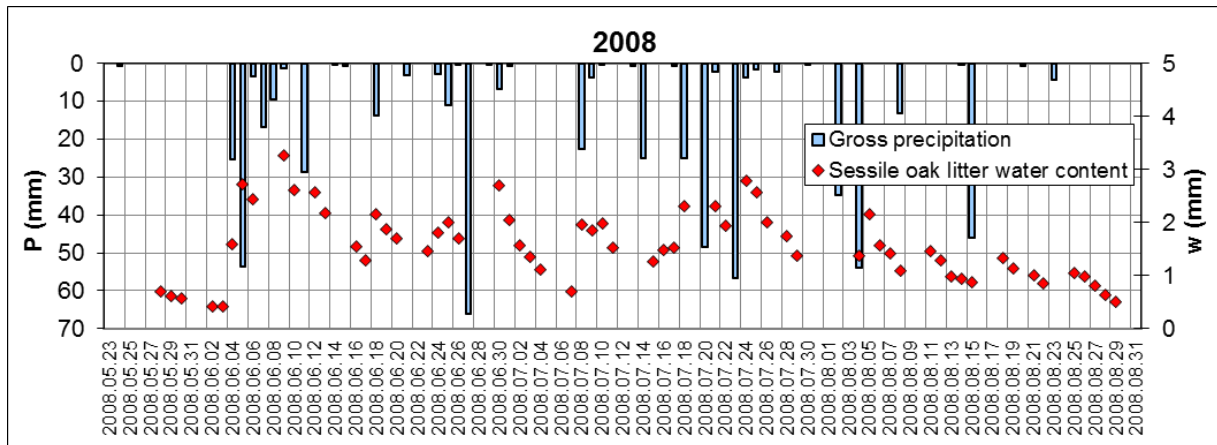


Figure 1. Gross precipitation and water content of the forest litter in the sessile oak stand during the year 2008

4 THE STUDY SITE

The study site (Hidegvíz Valley, Figure 2.) is located in Sopron Hills at the eastern border of the Alps. (Lat: 47-35-08 - 47-39-06, Lon: 16-25-31 - 16-28-15 above WGS 84 datum.)

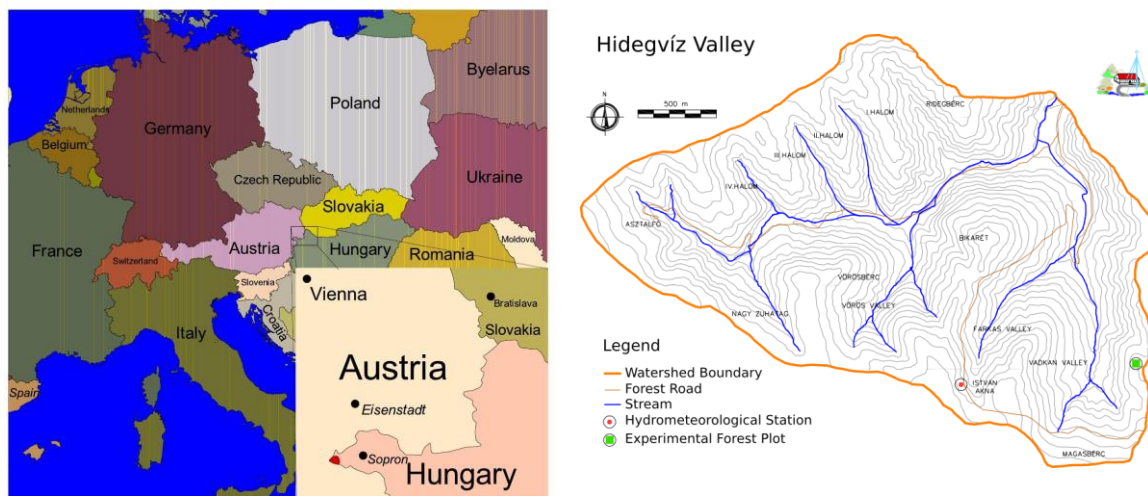


Figure 2. The study site in Hidegvíz Valley

The area enjoys a sub-alpine climate, with daily mean temperatures of 19 °C in July, and -2 °C in January, and with an annual precipitation of 750 mm. Late spring and early summer are the wettest and fall is the driest season (Marosi and Somogyi, 1990; Dövényi, 2010).

The slope of the sessile oak stand is 3–6%, located on the west side at an altitude of 500 m above sea level. The soil is classified as Cutanic Luvisol (Epidystric). The stand forming tree species is sessile oak (*Quercus Petraea*). The average height of the middle-aged stand (40 years old at the start of these measurements) was 14–15 m, canopy closure was 87%, and the average diameter at breast height of the stand was 14–16 cm. The undergrowth of sessile oak stand was sparse.

Gross precipitation values were registered by an automatic rain gauge located about 1 km from the oak interception garden (N: 47°39'21, 16", E: 16°27'16, 28", m ASL: 515 m, WGS84). Temperatures were measured by an automatic thermometer located next to the automatic rain gauge.

5 CALCULATION OF THROUGHFALL

Since no continuous throughfall records are available, throughfall data ($Th=T+D$ from Eq. 1) applied for the interception analyses have been determined with iteration using the gross precipitation data with the following equation:

$$P = S' \cdot \left(1 - e^{-\frac{Th}{S'}} \right) + K' \cdot Th \quad (6)$$

In the Eq. 6 P is the gross precipitation; S' is the parameter depending on the water storage capacity of forest canopy; K' is the multiplier factor which describes the slope of the line approximating the relation between gross precipitation and throughfall data above the limit of storage capacity. In our case $K'=1$ and Th is the throughfall (Figure 3). According to the literature (Kucsara, 1996), rainfall with low intensity and rainfall depth can be almost entirely stored on the surface of leaves, while almost the total amount (i.e. the amount reduced by the evaporation) of precipitation falls through the canopy at heavy rainfalls when the storage capacity is exceeded. Eq. 6 represents this process.

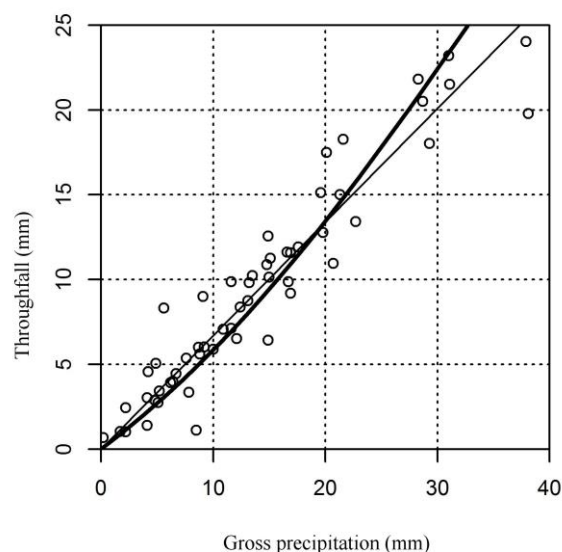


Figure 3. Connection of throughfall with gross precipitation

The iteration has been performed with the script using the R free software (R Core Team 2012). Throughfall data calculated with this method served as basis for the further analyses.

6 CALCULATION OF THE FOREST LITTER INTERCEPTION CONSIDERING THE WATER STORAGE

Litter weight in the frames changes year by year; thus maximum storage capacity changes as well. To apply the selected data from the 3 years in one combined estimation, data from the given year have been divided by the average weight of forest litter in the same year and

multiplied by the 3-year average litter weight. Results of the estimation (Eq. 7) related to the normalised data are shown in Table 1. Statistical analysis utilized nonlinear regression by the least-squares method performed with R software.

$$E_s = (1.799 - w_{(i-1)}) \cdot \left(1 - e^{-\left(\frac{Th}{(1.799 - w_{(i-1)})}\right)} \right) \quad (7)$$

Due to the spatial heterogeneity of the throughfall, there can be greater differences in the moisture changes of the 10 frames. The previous estimation was made using the average values based on the measurement of 10 frames. One extreme value can greatly offset the average values, thus distorting the estimation. Therefore, the approximation has also been made with weights. A reciprocal of the standard deviation for the ten data at the same time has been applied as a weight at that time. Results of this estimation (Eq. 8) are summarized in Table 1.

$$E_s = (1.702 - w_{(i-1)}) \cdot \left(1 - e^{-\left(\frac{Th}{(1.702 - w_{(i-1)})}\right)} \right) \quad (8)$$

Table 1. Results of the forest litter interception calculation based on the three-year dataset

	S	p-values	Standard residual error
Sessile oak	1.799	< 2e-16	0.4199
Sessile oak, weighted	1.702	< 2e-16	1.599

No significant deviation (< 0.1 mm) has been obtained between the storage capacities estimated with the two formulas (Eq. 7–8). Figure 4 demonstrates the results of the weighted estimation.

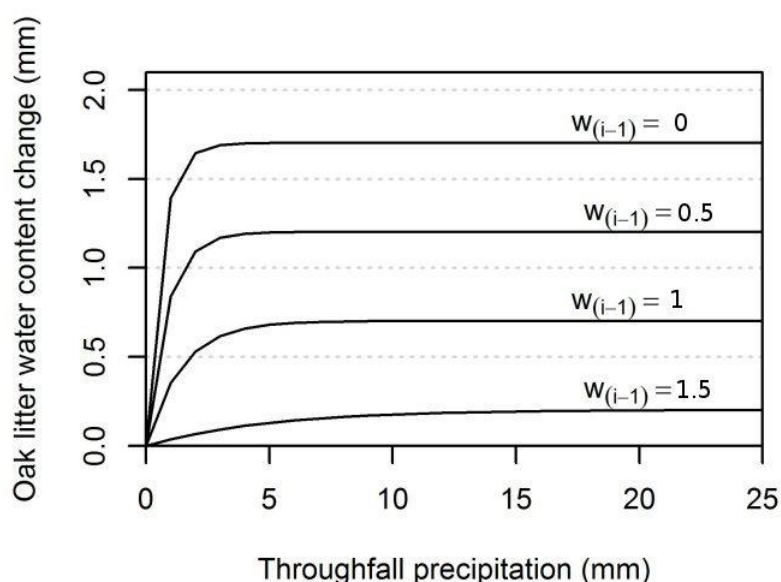


Figure 4. Water content change of the forest litter in a sessile oak stand with different antecedent water content (weighted estimation)

7 CALCULATION OF THE ANTECEDENT WATER CONTENT OF THE FOREST LITTER

The antecedent water content of the forest litter is an important question in terms of the litter interception. If the forest litter is not entirely dry, the maximum value of the storage capacity will be lower. Antecedent precipitation (API) has been calculated by the estimation of the effective storage.

According to the literature (Kontur et al. 2001), one method of the API calculation is based on a weighting process using linearly decreasing weights.

Water content of the forest litter decreases faster at the beginning of the desiccation process, and decreases more slowly to the end of the process. As the forest litter desiccation is non-linear, application of linear weights in the API calculation is incorrect. The speed of desiccation of the forest litter depends on the ambient temperature as well. In conclusion, a reliable equation to determine the API uses weights which regard the real desiccation and which are corrected with the temperature. We adapted the soil moisture relation of Jakeman and Hornberger (1993) for calculation of the antecedent water content of the forest litter:

$$w_i = c \cdot \left[P_1 + \left(1 - \frac{1}{\tau}\right) \cdot P_2 + \left(1 - \frac{1}{\tau}\right)^2 \cdot P_3 + \left(1 - \frac{1}{\tau}\right)^3 \cdot P_4 + \dots \right], \quad (9)$$

where c is the normalising parameter, $P_1, P_2, \dots$ is the rainfall depth which has fallen 1, 2... days before the rainfall event inducing the water content recharge of the forest litter. The current τ detention time has been computed using the Eq. 10:

$$\tau_i = \tau_0 \cdot \exp[g \cdot (T_0 - T_i)], \text{ where } \tau \geq 1, \quad (10)$$

where g is the factor of temperature-change (it shows how the τ changes as a function of the temperature), τ_0 is the reference detention time, T_0 is the reference-temperature, T_i is the temperature at the current time.

Parameters from the equations above have been calculated on the basis of our field observations. As the first step, we selected the desiccation periods according to the measurements, which lasted at least 5 days. Variables describing the speed of recession (desiccation process) have been determined using the equation of the exponential fitting based on the data of the observed periods:

$$w_i = w_0 \cdot e^{-\alpha \cdot t}, \quad (11)$$

where w_i is the water content related to the current day (mm)

w_0 is the initial water content (mm)

α speed of recession ($1/\text{day}$)

t is the elapsed days (day).

The τ detention times can be obtained as the reciprocals of the α rates of the decrease of water content. Average temperature values have also been computed for the desiccation periods.

Taking 0 °C for the reference temperature, parameters of the Eq. 10 were estimated by applying a linear regression model with a logarithmic transformation. Results of the estimation are the followings in the sessile oak (Figure 5, Table 2):

Table 2. τ_0 and g values for the observed desiccation periods, the determination coefficient (R^2) and p -value of the estimation

	τ_0	g	R^2	p-value
Sessile oak	21.926	0.088	0.80	$7.047 \cdot 10^{-6}$

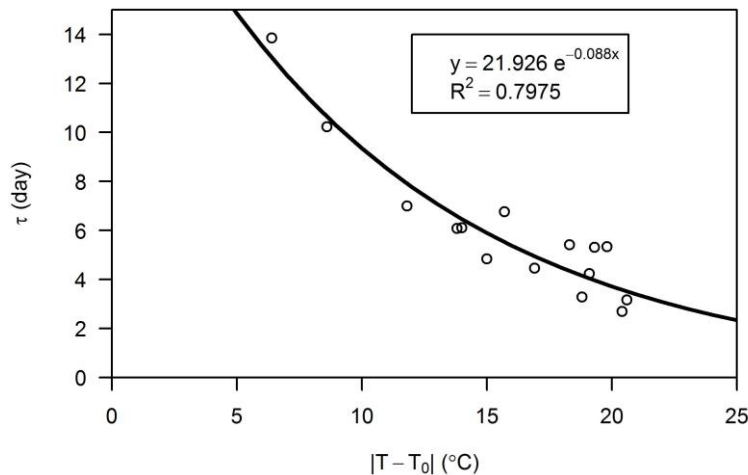


Figure 5. The τ detention time against the difference between the temperature of the desiccation period and the reference-temperature of sessile oak

Estimated parameters are the basis for calculating the antecedent water content (w_i). The determination coefficients were examined between the water content of the forest litter and the API (Jakeman-Hornberger 1993). The strength of the relation is moderate in the years 2007 and 2008, while a weak relation was obtained in 2006. In general, according to the Jakeman-Hornberger (1993) model, the API_{30} shows the strongest correlation with the water content of the forest litter, and the second strongest correlation was with the API_{20} . Figure 6 demonstrates the strength of relations between the API according to the Jakeman-Hornberger (1993) model and the water content of the sessile oak litter in the year 2008. The strength of the relation increases from 0.56 to 0.69 neglecting only two outliers (Figure 6). After appropriate reordering, the equations of fitted lines provide the c parameters (Eq. 9) related to the given time periods in the given years. Considering the values of the c parameters, similar values were recorded in the years 2007 and 2008, while c parameters are the half of the values from 2007 and 2008 in the year 2006. The reason of this phenomenon is not yet known.

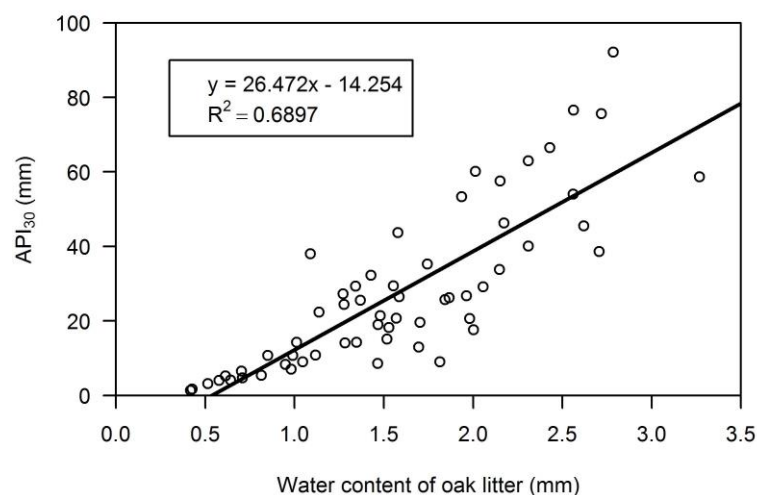


Figure 6. Relation between the API_{30} (according to the Jakeman-Hornberger (1993) model) and the water content of the sessile oak litter in 2008 after neglecting outliers.

8 APPLICATION OF THE MODEL

The model developed for estimating the forest litter interception can be used under changing environmental (different climate and litter mass, etc.) conditions. Reliable adaptation of the model depends on having information about the litter mass of the forest stand which can be determined from the maximum storage capacity of the litter in the given stand. The throughfall from the gross precipitation can be estimated on the basis of the leaf area index. The antecedent moisture content of the litter can be calculated with the Jakeman – Hornberger model (1993) using the daily temperature and precipitation data, and as a result, litter interception can be estimated. However, for the universal model application, a multi-year data set is required. Using different input climate data, the impact of the climate change can be forecast, e.g. the effect of different temperatures (change in speed of recession) or precipitation amount and distribution (changes in the length of the drying period). If the litter production is changing due to climate change (Black 2009), further modifications of the model should be made regarding the storage capacity. The impact of forestry interventions can be also estimated with this model, such as the hydrological aspects of litter interception related to clear cuts or gaps.

The effect of climate change was estimated by the model. It was found that the rate of litter interception is decreased (*Table 3*) due to the change of the distribution of precipitation. Rainfall less than 2 mm does not reach the forest litter (Kucsara 1996). Under the impact of climate change, precipitation becomes more extreme. In our estimations, the sequentially 2–4 rainfall events were merged, and the maximum rainfall decrease (30 mm over 10 years in the summer half-year) predicted by Gaál (2007) was validated with a linear equation. Iterating the new predicted data series, a throughfall dataset was calculated which serves as a basis for further estimations (*Th* for 2016–2018). An assumed increase in temperature and changes in litter mass (Kotroczó et al. 2012) were not taken into account. *Table 3* shows the calculated data for the growing season.

Table 3. Forest litter interception estimation for three years by the model we developed (growing season)

Year	E_s (mm)	E_s (%)	Year	E_s (mm)	E_s (%)
2006	23.70	4.74	2016	12.87	2.74
2007	43.29	7.32	2017	25.13	4.48
2008	42.63	6.01	2018	25.12	3.70

The impact of climate change on litter interception is a complex process. Due to a lower rate of small rainfall events (less than 2 mm) more precipitation can reach the litter. An extreme rainfall event does not increase the water content of the litter after the saturation of the storage capacity. Heavy rains show a proportionately lower impact on the litter. Forest litter interception was reduced about 2–3% in the proportion of gross precipitation over 10 years according to this hypothesis (*Table 3*). Taking into account the effect of higher temperature, this reduction would be smaller, because the litter can dry out between two rainfall events. Therefore, the current storage capacity would be larger.

9 DISCUSSION

According to our model estimation, the litter interception was 5–7% of the gross precipitation. Other authors also published data about litter interception of gross precipitation or annual value (*Table 4*). Litter interception data of the net precipitation (throughfall) was 8–12% in mixed oak stands (Pathak et al. 1985), and 34% for November 2004 in beech forests (Gerrits et al. 2006).

Table 4. Forest litter interception values according some authors

	Study site	Tree species	Litter interception (%) of gross precipitation
Pathak et al. (1985)	India (Kumaun Himalaya)	<i>mixed oak forest</i>	8–12
Führer (1994)	Central Europe	<i>(Quercus petraea)</i>	8 (summer) 16 (winter)
	South Africa	<i>(Pinus patula)</i>	12.1
Bulcock és Jewitt (2012)		<i>(Eucalyptus grandis)</i>	8.5
		<i>(Acacia mearnsii)</i>	6.6

The comparison of our data is uncertain because of different climatic conditions and tree species (mainly due to the weight of litter) and different methods of measurement.

10 SUMMARY

A simple formula was developed to describe the water retention properties of litter using daily gross precipitation and forest litter mass measurement data series. This equation takes into account the moisture content of the forest litter before rainfall events, thus considering the current storage capacity. To determine the antecedent moisture content, the Jakeman – Hornberger (1993) model has been adapted which refers to the soil moisture. It has been found that the antecedent precipitation index, which applies exponential weights (taking temperature into account), are suitable to estimate the antecedent moisture content of the litter. The model we developed provide an opportunity to estimate litter interception under changing climatic conditions and thus the effects of climate change can be detected.

Acknowledgements: The research was supported by TÁMOP-4.2.2.A-11/1/KONV-2012-0013. The research of Zoltán Gribovszki was supported by the European Union and the State of Hungary, co-financed by the European Social Fund in the framework of TÁMOP 4.2.4. A/2-11-1-2012-0001 'National Excellence Program'.

REFERENCES

- BULCOCK, H.H. – JEWITT, G.P.W. (2012): Field data collection and analysis of canopy and litter interception in commercial forest plantations in the KwaZulu-Natal Midlands, South Africa, *Hydrology and Earth System Sciences*, 16: 3717–3728.
- DÖVÉNYI, Z. (ED.) (2010): Magyarország kistájainak katasztere [Cadastre of Small Regions in Hungary]. MTA Földrajztudományi Kutatóintézet, Budapest, 876 p. (in Hungarian).
- DELFS, J. (1955): Die Niederschlagszurückhaltung im Walde. [Retention of the precipitation in the forest] In.: Mitteilungen des Arbeitskreises "Wald und Wasser". Nr. 2. Koblenz. (in German)
- FEKETE Z. (1949): A koronaátmérő és a mellmagassági átmérő kölcsönös viszonya. [Mutual relationship of the crown diameter and the diameter at breast height.] *Erdészeti lapok*, 85 (10): 234–237. (in Hungarian)
- FÜHRER E. (1994): Csapadékmérések bükkös, kocsánytalan tölgyes és lucfenyves ökoszisztémában. [Precipitation measurements in beech, sessile oak and spruce forest ecosystem] *Erdészeti Kutatások*, 84: 11–35. (in Hungarian)

- GAÁL M. (2007): A kukoricatermelés klimatikus feltételeinek várható változása a B2 szcenárió alapján. [Expected changes of climatic conditions of maize production under the B2 scenario] In: Csete L. (ed.): „Klíma-21” Füzetek. 51: 48–56. (in Hungarian)
- GERRITS, A.M.J. – SAVENIJE, H.H.G. – HOFFMANN, L., PFISTER, L. (2006): Measuring forest floor interception in a beech forest in Luxembourg. *Hydrology and Earth System Sciences Discussions*, 3: 2323–2341.
- HELVEY, J.D. (1964): Rainfall interception by hardwood forest litter in the southern Appalachians. U.S. Forest Service Research Paper, SE 8: 1–8.
- HORTON, R.E. (1919): Rainfall interception. *Monthly Weather Review.*, 47: 603–623.
- IJJÁSZ E. (1936): A nyersalomtakaró szerepe az erdők vízháztartásában. [The role of the non-fermented forest litter in the water balance of forests] *Hidrológiai Közlöny*, 16: 72–101. (in Hungarian)
- JAKEMAN, A.J., HORNBERGER, G.M. (1993): How much complexity is warranted in a rainfall-runoff model?. *Water Resources Research* 29 (8): 2637–2649.
- KONTUR I. – KORIS K. – WINTER J. (2001): Hidrológiai számítások. [Hydrological calculation] Linograf Kft. Gödöllő. (in Hungarian)
- KOTROCZÓ, Zs. – VERES, Zs. – FEKETE, I. – PAPP, M. – TÓTH, J.A. (2012): Effects of Climate Change on Litter Production in a *Quercetum petraeae-cerris*. *Acta Silvatica et Lignaria Hungarica* 8: 31–38.
- KUCSARA M. (1996): Csapadék és lefolyás erdészeti kisvízgyűjtőn. [Precipitation and runoff in forested catchment] Doktori értekezés, Sopron. (in Hungarian)
- LEE, R. (1980): *Forest Hydrology*. Columbia University Press, New York.
- LEONARD, R.E. (1967): Mathematical Theory of Interception. In.: W. E. Sopper and H. W Lull (ed.), *International Symposium on Forest Hydrology*. Pergamon Press, Oxford.
- MAROSI, S. – SOMOGYI, S. (Eds.) (1990): Magyarország Kistájainak Katasztere I. [Cadastre of Small Regions in Hungary I.]. MTA Földrajztudományi Kutató Intézet, Budapest. 479 p. (in Hungarian).
- MERRIAM, R.A. (1960): A note on the interception loss equation. *Journal of Geophysical Research*, 65 (11): 3850–3851.
- PATHAK, P.C. – PANDEY, A.N. – SINGH, J.S. (1985): Apportion of rainfall in central Himalayan forests (India). *Journal of Hydrology*, 76: 319–332.
- PUTUHENA, W.M. – CORDERY, I. (1996): Estimation of interception capacity of the forest floor, *Journal of Hydrology*, 180: 283–299.
- R CORE TEAM (2012): R: A language and environment for statistical computing. R Foundation for Statistical Computing, Vienna, Austria. ISBN 3-900051-07-0, URL <http://www.R-project.org/>.
- SITKEY, J. (2006): Water cycle investigations in Hungarian forest ecosystems. *Forestry Studies in China*, 8 (4): 82–86.
- YOUMIN, W. – JUNHUA W. (2002): The Water and Soil Conservative Function of Litter on Forestland, 12th ISCO Conference. Beijing, China. Online: <http://www.tucson.ars.ag.gov/isco/isco12/VolumeII/TheWaterandSoilConservativeFunction.pdf> (Access date: 25.10.2013)
- <http://www.uwe.com.tw/en/home.php> (Access date: 25.10.2013)

Comparison of Groundwater Uptake and Salt Dynamics of an Oak Forest and of a Pasture on the Hungarian Great Plain

Zoltán GRIBOVSKI^{a*} – Péter KALICZ^a –
Kitti BALOG^b – András SZABÓ^b – Tibor TÓTH^b

^a Institute of Geomatics and Civil Engineering, University of West Hungary, Sopron, Hungary

^b Institute for Soil Sciences and Agricultural Chemistry, Centre for Agricultural Research,
Hungarian Academy of Sciences Budapest

Abstract – The forest area in Hungary has increased during the last century from 1.1 to 2.0 million ha. The European Union supports further afforestation so roughly 15–18 000 hectares might be planted each year, mostly on the Hungarian Great Plain. Water uptake of forests from groundwater can be significant in shallow groundwater areas of the Hungarian Great Plain especially in drought periods. Therefore forests can induce water table depression and subsurface salt accumulation above saline water table in areas with a negative water balance.

The impact of forests was examined by a systematic study on the Hungarian Great Plain. An oak forest and a pasture groundwater uptake and salt accumulation effect were compared at the stand scale. Under the forest the water table levels were roughly 0.5 m lower than under the pasture, and the groundwater uptake of the oak plot was more than twice as great. Larger forest groundwater use is not followed by a higher salt uptake. Therefore slight salt accumulation was measured both in the soil and also in the groundwater. Higher groundwater uptake may cause more significant salt accumulation under pronounced drought conditions of a warmer climate.

evapotranspiration / shallow groundwater / diurnal fluctuation / salt accumulation / forest

Kivonat – Egy alföldi kocsányos tölgyes és egy szomszédos gyepterület talajvízfelvételének és sódinamikájának összehasonlítása. Magyarország erdősültsége a 20. század folyamán 1.1 millió ha-ról 2.0 millió hektárra nőtt. Az Európai Unió támogatja az erdősítést, így évente megközelítőleg 15–18 000 hektár nagyrészt mezőgazdasági területet erdősítenek be az Alföldön. A felszínközeli talajvízszinttel rendelkező területeken, így a Nagyalföld jelentős részén is, az erdők talajvízfelvevétele, főként a száraz periódusokban, igen nagymértékű lehet. Előbbiek miatt az erdők a talajvízszint süllyedését és egyes helyeken esetlegesen só-akkumulációt idézhetnek elő a talajvízben és a talajvízszint fölötti talajrétegekben az erősen negatív vízmérlegű területeken.

Egy nagyalföldi mintavételi pontokat tartalmazó szisztematikus vizsgálat keretében kezdtük el keresni a fenti kérdésekre a választ. Jelen cikkben egy kocsányos tölgyes és egy szomszédos legelő talajvíz-felhasználását és só-felhalmozódásra gyakorolt hatását hasonlítjuk össze. A vizsgálatok szerint az erdő durván fél méterrel csökkenti a talajvízszintet és több, mint kétszeres a talajvízből történő vízfelvevétele, mint a gyepterületnek. Az erdő nagyobb talajvíz-felhasználása viszont nincs arányban a sófelvétellel, így mind a talajban, mind a talajvízben kismértékű só-akkumuláció tapasztalható. A

* Corresponding author: zgribo@emk.nyme.hu; H-9400 SOPRON, Bajcsy-Zs. u. 4.

klímaváltozás kapcsán a hosszabb száraz periódusokban előálló nagyobb párolgási kényszer (és nagyobb talajvízfelvétel) a mérténél sokkal jelentősebb sófelhalmozódást okozhat.

evapotranszpiráció / sekély talajvíz / napi ingadozás / só akkumuláció / erdők

1 INTRODUCTION

Significant afforestation is planned in Hungary (700 000 ha), and this plan is also supported by the EU (Andrasevits et al., 2005). The areas available for afforestation are generally less profitable for field crop production. Based on the analysis of the soil types of the formerly forested areas, Führer and Járó (2005) stated that the Hungarian Great Plain can be the most important region for afforestation. However the hydrological and climatic role of the forest is most critical in the Hungarian Great Plain. From a hydrological viewpoint, two basic situations are encountered:

- When the water table is deeper than the root zone (these are very critical sites for afforestation), and
- when groundwater can be a source of transpiration. In the later situation groundwater uptake of a forest is the most frequent theme of this research.

In the shallow water table areas, forest vegetation can change the water and salt balance of the soil (Nosetto et al., 2007) and these effects are manifested in the lowering of the water table (Major, 2002) and increase of salt concentration in certain soil and subsoil layers (Jobbágy and Jackson, 2004; Nosetto et al., 2007; Nosetto et al., 2008). In a shallow groundwater environment, the impact of a forest on groundwater and salt dynamics are reviewed by Szabó et al. (2012) specially focusing on the processes going on in the Hungarian Great Plain (*Figure 1*).

Forest evapotranspiration (sum of transpiration and interception) is generally higher than the evapotranspiration of neighbouring grasslands, because of the increased LAI (leaf area index) and root depth of the woody vegetation (Calder, 1998; Nosetto et al., 2005). These properties of a forest are especially true in the Great Plain with a subhumid climate, where the precipitation is less than the water demand of woody vegetation, so trees can survive arid periods if they can use groundwater resources as well (Ijjász, 1939; Magyar, 1961).

Móricz et al. (2012) compared the water balance of different land uses in Nyírség (Northeast part of the Hungarian Great Plain), and found that a common oak forest has approximately 30% more evapotranspiration (758 mm a^{-1}) than a neighbouring fallow land (623 mm a^{-1}). The difference is more significant (3 fold) in groundwater use of different vegetation types (oak: 243 mm a^{-1} , fallow: 85 mm a^{-1}). The groundwater consumption was close to 60% of the total transpiration in the oak forest and approximately 30% on the fallow plot. Groundwater consumption was approximately 40% less in the wetter vegetation period of 2008 than in the drier growing season of 2007, despite the fact that the groundwater level was deeper during the drier summer. Thus, during the drier period both vegetation covers relied considerably on the available groundwater resources.

Magyar (1961) analyzed the root growth of seedlings in a saline environment and found that in a moderately saline soil environment, roots of seedlings can reach 3.5 m down to the water table in three years, but roots of elms can be detected 5.15 m deep two years after planting.

Under a forest, the water table can be detected deeper than under grassland if the trees are able to reach it. The difference of the water table level is larger in the growing season (Ijjász, 1939). Jobbágy and Jackson (2004) stated that the groundwater level can be 75 cm deeper under a forest. On the basis of their measurements in shallow groundwater areas of Kiskunság, the researchers Szodfridt and Faragó (1968) found that forest vegetation generally

lowers a water table 50–60 cm compared to herbaceous vegetation. But they also stated that on the sites where groundwater levels (in April) are found deeper than 2.5 m, only sparse herbaceous vegetation can survive under natural conditions. Major (2002) observed that under a coniferous forest compartment in Kiskunság, the water table can be 0.8–1.1 m deeper than under the neighbouring non-forested areas.

Szilágyi et al. (2012) analysed the evapotranspiration (determined by linear transformation of the MODIS daytime land surface temperature) in the Danube-Tisza Sand Plateau of the Hungarian Great Plain. According to land cover, the largest ET (about 505 mm a⁻¹) was found over deciduous forests where the regional annual precipitation was 550 mm. On some locations ET is estimated to be larger than precipitation. These groundwater discharge areas in many locations overlap with forest cover. Often the dense and deep root system of forests can tap the shallow groundwater level (if it exists), thus leading to a high ET rate, frequently exceeding the rate of precipitation which the area receives. In the groundwater discharge areas, the average annual ET for the forests is 620 mm a⁻¹, which is about 70–80 mm more than the mean annual precipitation rate of the region. This negative water balance can be maintained if forests create a local depression in the water table so as to induce groundwater flow directed toward them (*Figure 1*).

Detailed investigation of the afforestation in the Hungarian Great Plain is being carried out through the systematic study of all affecting factors, like climatic water balance, water table depth and salinity, tree species, subsoil layering and stand age (in the frame of the OTKA NN 79835 project). The aim of this paper is to describe the complex interrelation of these factors in such a way that the effect of planned new afforestations could be predicted.

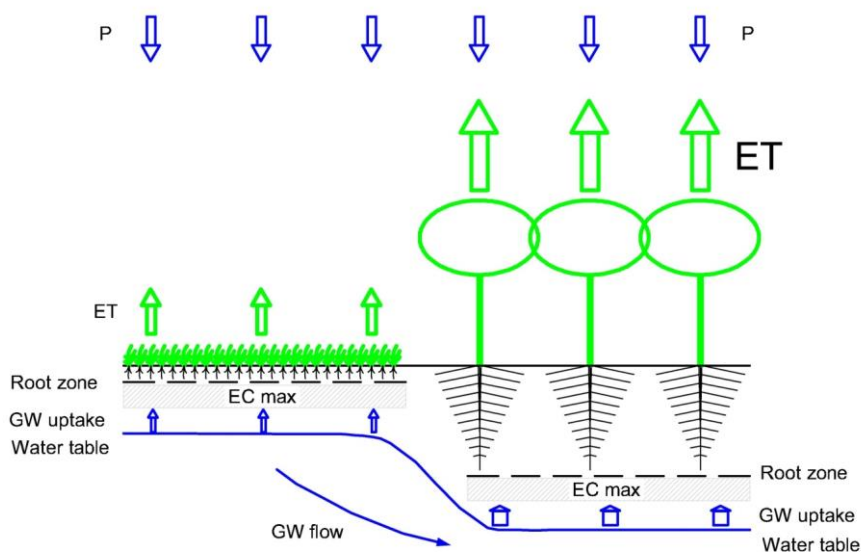


Figure 1. Impact of forest vegetation on water and salt balance of a shallow groundwater site (hypothetical model). ET evapotranspiration, P precipitation, EC (electrical conductivity), GW groundwater.

2 MATERIALS AND METHODS

2.1 Site description

Altogether 108 plots of forested and nearby non-forested land were sampled in the above mentioned project. At the stand scale, 18 representative forested and accompanied non-forested stands (from the 108) are monitored intensively. In this paper the dataset of two

neighbouring plots (a common oak forest [60 years old, 22 m high closed forest] and a grass stand [without shrubs]) were compared next to Jászfelsőszentgyörgy (47° 29' N, 19° 46' E) in the very dry summer of 2012 (Figure 2). These vegetation types are very typical in the Hungarian Great Plain.

On historical land use maps, no forest cover could be found in the area between 1780 and 1914. Afforestation started after 1914 on the oak plot, but the pasture site was never forested. The area has a flat topography. The geological basis of the research area is fluvial sediments, mostly sand and silt.

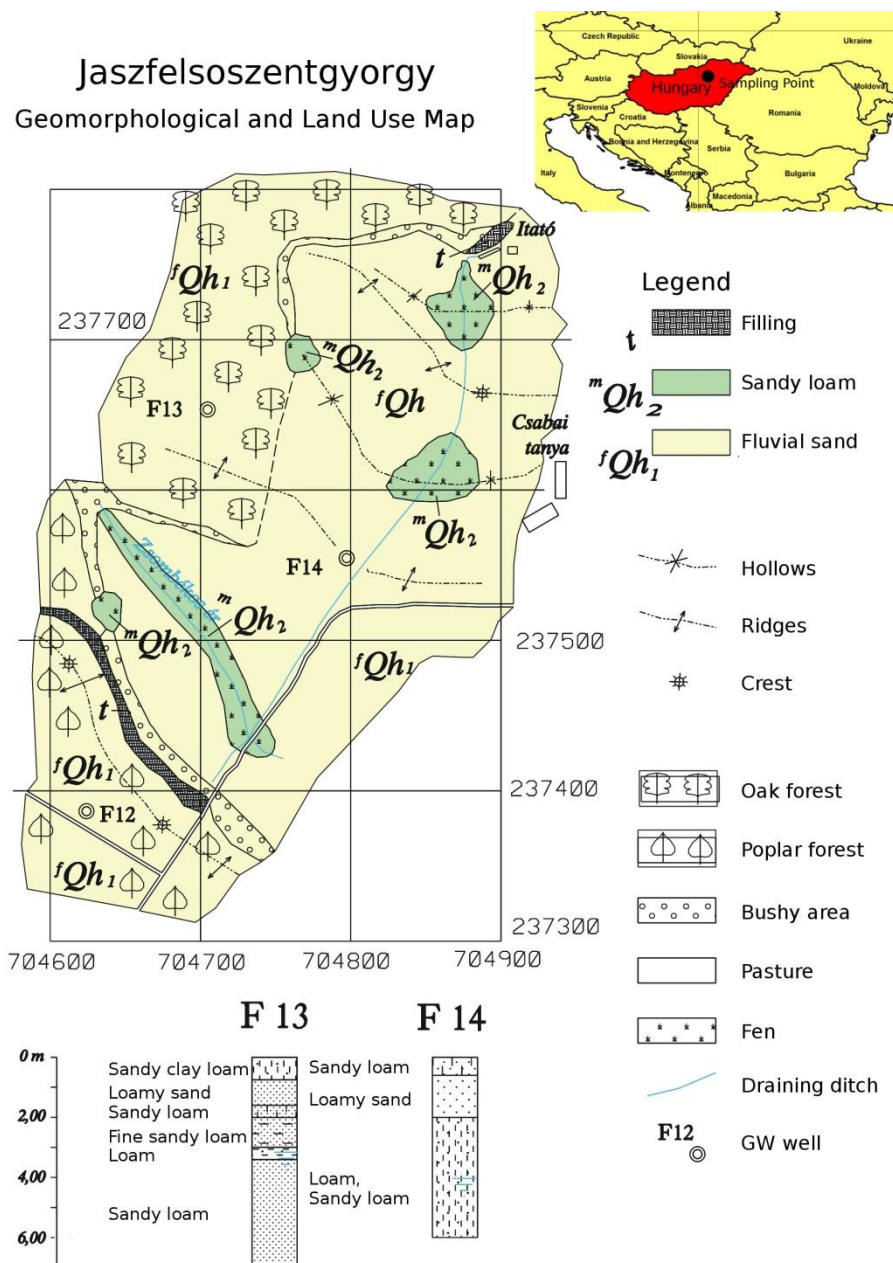


Figure 2. Geomorphological map with land use and location of monitoring plots with GW wells. Oak plot well is indicated by F13 and pasture plot well by F14.

2.2 Data collection

GW wells are installed in the common oak forest (F13) and in the grass covered pasture (F14) 7 and 6 m deep in the neighbourhood of Jászfelsőszentgyörgy (located in northern part of

Great Plain). The geological layers of the plots can be seen in *Figure 2*. GW wells were instrumented with vented pressure transducers (www.dataqua.hu) and a meteorological station was placed in the neighbourhood on a pasture in the first days of July, 2012. Pressure transducers take readings at 15 minute intervals (for calculation of ET from groundwater) and the meteorological station collects standard meteorological parameters (temperature, relative humidity, net radiation, wind speed and precipitation) every 5 minutes (for calculation of reference ET). Only the first month of dataset is adequate for further analysis because of an error in the data collectors.

Water table levels from the surface and precipitation can be seen in *Figure 4* as a representation of the collected dataset.

At both sites a mineral soil was sampled at depths of 10, 30, 50, 70, 90 cm (20 cm intervals) and at 50 cm intervals down to the depth of the GW wells. Electrical Conductivity was determined in a 1:2.5 soil-water extract (for calculation of salt content). Soil texture was specified according to particle size distribution determined by the pipette method. Groundwater was also sampled for electrical conductivity, measured by a conductivity meter.

2.3 Evapotranspiration calculation method

In shallow groundwater areas, vegetation can take up water both from unsaturated or saturated zones. If groundwater was used by vegetation, a diurnal signal can be detected in the water table hydrograph (White 1932, Gribovszki et al. 2010). The amplitude of the signal depends on the soil texture and magnitude of groundwater uptake (*Figure 5*). The riparian-zone groundwater ET estimation technique of Gribovszki et al. (2008), based on the diurnal fluctuations of the groundwater levels (by further developing of the original White (1932) method), were used.

The ET-estimation method employs the water balance equations (written for the saturated zone)

$$\frac{\partial S}{\partial t} = S_y(t, h) \frac{\partial WT}{\partial t} = Q_i - Q_o - ET_{gw} = Q_{net} - ET_{gw} \quad (1)$$

where dS / dt [L^3T^{-1}] is the time-rate of change in groundwater storage (S), h [L] the average groundwater level (above reference), S_y the specific yield, Q_i , the incoming discharge [L^3T^{-1}] to the unit land area, and Q_o , the outgoing discharge from the unit land area [L^3T^{-1}].

The net supply/replenishment rate is the difference of the incoming and outgoing discharges to and from, $Q_{net} = Q_i - Q_o$, [L^3T^{-1}]. ET_{gw} , is evapotranspiration (directly or indirectly) from the groundwater.

In order to obtain the net supply rate (Q_{net}), an empirical method (using characteristic points) was employed (*Figure 3*):

- The maximum of Q_{net} for each day was calculated by selecting the largest positive time-rate of change value in the groundwater level readings, such as $Q_{net} = S_y \Delta h / \Delta t$.
- The minimum of Q_{net} was obtained by calculating the mean of the smallest time-rate of change in h taken in the predawn/dawn hours. The averaging is necessary in order to minimize the relatively large measurement error when the changes are small.
- The resulting values of the Q_{net} extrema then were assigned to those temporal locations where the groundwater level extrema took place.
- It was followed by a spline interpolation of the Q_{net} values to derive intermediate values between the specified extrema (Gribovszki et al. 2008).

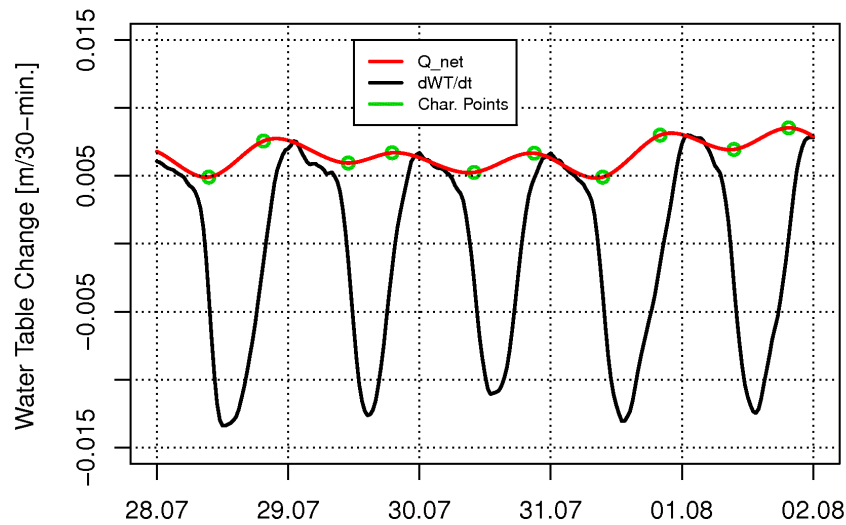


Figure 3. Graphic representation of the empirical method, Q_{net} is replenishment rate, dWT/dt is the time rate of change of water table, Char. Points is the characteristic points of replenishment rate

Finally, after calculating the Q_{net} values, the ET_{gw} rates can be obtained by rearranging the former water balance equation as

$$ET_{gw} = S_y \left(Q_{net} - \frac{dh}{dt} \right) \quad (2)$$

S_y values (as readily available specific yield) were estimated on the basis of the texture class of soil layers in the depth interval of diurnal fluctuations according to Loheide et al. (2005). The soil texture class (similar for both stands) was loam and sandy loam in the depth of the water table. Therefore S_y is between 0.045–0.055 roughly 0.05.

ET values Penman-Monteith ET (PM_ET) rates (for a grass reference surface) were calculated from the meteorological dataset as a comparative reference (Allen et al., 1998).

3 RESULTS AND DISCUSSION

3.1 Water table levels and fluctuation

Water table depression in the forest next to an adjacent pasture together with a significant difference in the amplitude of diurnal fluctuations suggested an increased groundwater use of the forest (Figure 4).

Differences in water table levels from the surface were 0.44 m on average during July 2012 (Figure 4). In contrast when groundwater levels are expressed in absolute values (a.s.l) the difference became 0.9 m (because of the lower elevation of the oak stand). Both of the differences mean a depression in water table under the forest. The magnitude of the depression was similar to the water table drop determined by Nosoetto et al. (2007) on a planted oak forest and adjacent grassland in the Hortobágy region (0.26–0.60 m) and those determined by Móricz et al. (2012) by comparing a common oak stand and a neighboring fallow plot in Nyírség (in a dry period of the growing season 0.5–0.6 m).

The sinking of the water table was similar during the sampled period (0.37 m/month for oak and 0.35 m/month for pasture). It should be noted that the period analyzed was after a dry

spring. Therefore the water table was almost in its lowest position. (Therefore we are close to the very end of the general groundwater recession curve, where further decay is very slow).

Rainfall interrupted the fluctuations at both places (e.g. July 11) but this is probably not the effect of a surplus recharge to the groundwater (because the water table was relatively deep) nor a cessation of groundwater use of vegetation (*Figure 4*).

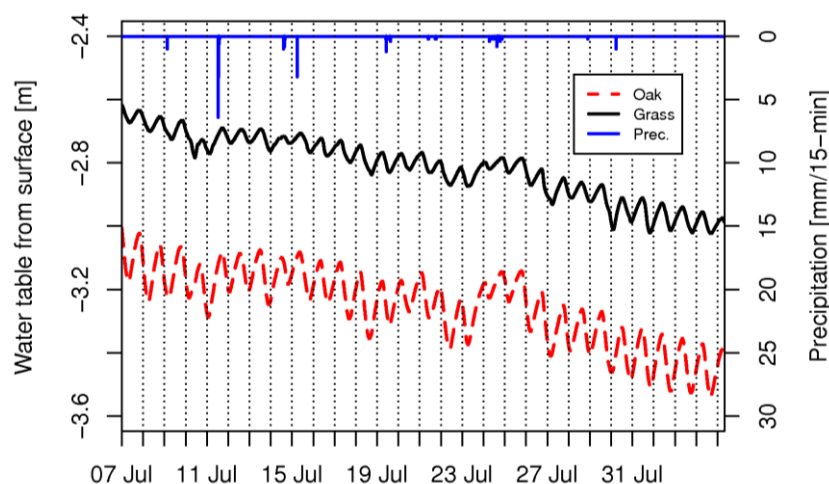


Figure 4. Water table from the surface under the oak (forest) and grass (pasture) sites (07. 07. 2012. – 05/ 08/ 2012.)

The amplitude of groundwater fluctuation for a forest is more than twice as large (16/2 cm) than for a pasture (7.2/2 cm) (*Figure 5*). The appearance of a diurnal signal under a pasture shows us the groundwater uptake of grass vegetation. The magnitude of the fluctuation has a strong connection to groundwater use (Soylu et al. 2012) so it shows us the more significant groundwater use of a forest (because the soil textures of the two plots are similar: sandy-loam, loam). The magnitude of the fluctuation was higher than calculated by Noretto et al. (2007) (5.5 cm on average for oak forest), but similar to that determined by Mórícz et al. (2012) (14 cm for an oak forest and 2 cm for the fallow plot in dry periods) for similar soil types.

The time of the maximum and minimum groundwater levels were the same for both land covers (9h for max. and 20h for min.) validating that the inducing effect is the same (*Figure 5*).

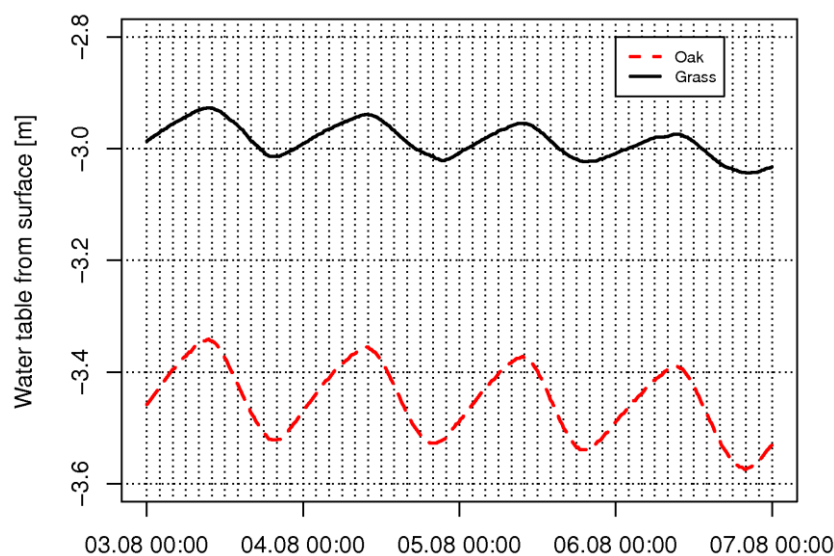


Figure 5. Diurnal fluctuations in water table levels comparing an oak (forest) and a grass (pasture) site

3.2 ET_{gw} values for an oak and a pasture site

Using the empirical ET estimation technique of Gribovszki et al. (2008), the groundwater uptake of different vegetation types, were calculated in a very dry period of summer 2012.

Figure 6 shows ET rates with 30-min frequency and in Figure 7 ET rates with daily frequency are shown.

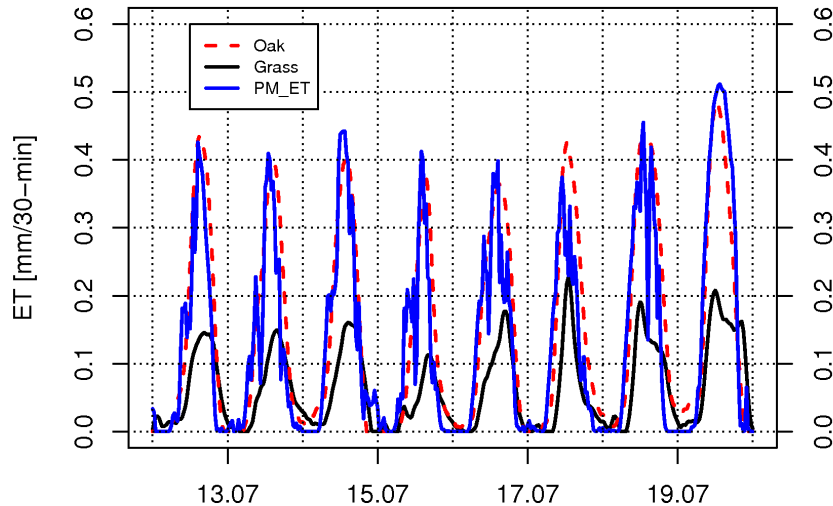


Figure 6. Calculated ET rates with 30-min frequency

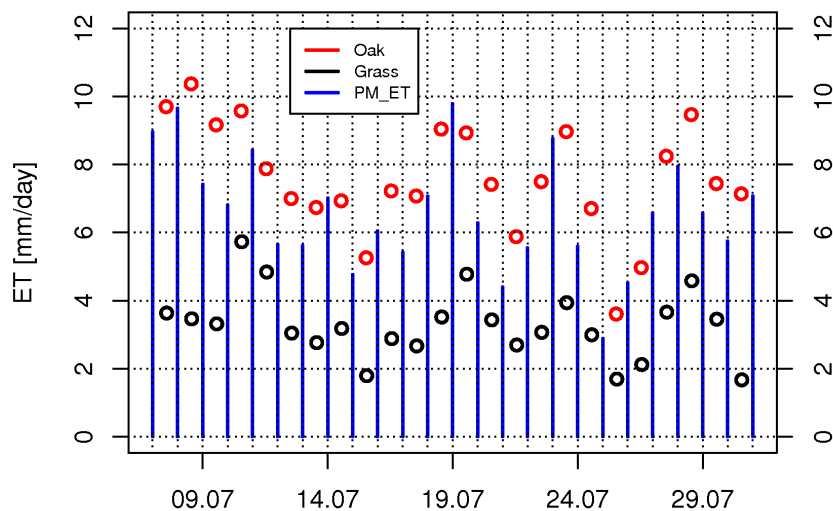


Figure 7. ET rates aggregated to a daily scale

ET rates have the following characteristics:

Groundwater uptake of an oak stand (mean: 7.5 mm/day) is a bit higher than PM_ET , (mean: 6.6 mm/day). Pasture (grass) ET_{gw} (mean: 3.5 mm/day) is less than half of the oak.

A rate higher than the potential rate values for oak can be found because the potential ET value was calculated for a grass reference surface. If calculation of potential ET had been conducted for rougher surface conditions and for higher LAI of the forest, the ET values would have been higher because of the greater atmospheric and canopy conductance of the forest canopy.

The daily groundwater uptake seems to be great, but the data seem to be acceptable taking into account that the period of analyses was very hot and till July of 2012 soil profile

had already lost almost all of the moisture stored in preceding periods and all around there is a dry and warm environment. (Therefore the oasis effect can enhance *ET*).

As a comparison, *ET* values of Noretto et al. (2007) in Hortobágy determined a 1.9 mm/day (up to 3.2 mm/day) groundwater *ET* for an oak forest on the basis of diurnal fluctuation of the water table. In that study the groundwater levels were significantly lower (on average 5 m) and the measurement period was in autumn. Therefore the higher values are possible in our case. In contrast using a diurnal method Butler et al. (2007) obtained groundwater *ET* rates of 2.9–9.3 mm/day for mixed vegetation types based on continuous groundwater level readings at groundwater depths between 0.3 and 3.4 m from the surface. Therefore calculated groundwater *ET* rates were close to total *ET* as in our case.

It must be noted that determination of readily available S_y is a weak point in all diurnal signal based *ET* estimation methods. Therefore the above determined *ET* values are not absolutely accurate, but the ratio of *ET* for different land covers is more accurate.

The correlation values between *PM_ET* and estimated groundwater *ET* rates are the following (Table 1).

Table 1. Correlation coefficients (*r*) between reference *PM_ET* and estimated *ET_{gw}* values

Stand	30-min scale	Daily scale
Oak-PM	0.938***	0.853***
Pasture-PM	0.816***	0.743***

Oak-PM means correlation between *ET_{gw}* of Oak site and reference *ET* (*PM_ET*)

Pasture-PM means correlation between *ET_{gw}* of Pasture site and reference *ET* (*PM_ET*)

*** Signif. code, *p*-value is less than 0.001

The stronger correlations (also for 30-min and daily scales) between *Oak_ET* and *PM_ET* showed that during the analyzed period these parameters are very similar. It means that *Oak_ET* reached the magnitude of potential *ET* and the water used for *ET* was mostly consumed from groundwater according to the meteorological constraint because there is no usable soil moisture in the soil column in this very dry period. The better correlation of pasture at a 30-min scale means that the diurnal shape of the two curves is similar, but the lower correlation for the daily scale shows a lower correspondence of *Pasture_ET* to meteorological factors. (Probably the root system of grass is not as adequate for as much groundwater uptake as that of the forest).

3.3 Salt Dynamics

Specific electric conductivity, which is strongly correlated with salt content, was measured to evaluate salt accumulation (Figure 8). The greatest difference in soil salt content between two land use types was detected in the upper part of the soil and at a depth of 350 cm. The specific conductivity values were 127 and 70 $\mu\text{S}/\text{cm}$ higher in the soil of an oak forest at that depth. As a comparison, conductivity values measured by Noretto (2007) in a similar oak and grassland comparison in Hortobágy) were generally 2–5 times higher than in this study. The vertical profile distribution was different in Hortobágy (Noretto 2007) showing significantly higher conductivity values for grass in upper soil layers, which cannot be detected in Jászfelsőszentgyörgy. The higher conductivities of lower soil layers (above the groundwater) for oak forests showed a similar tendency at Jászfelsőszentgyörgy and Hortobágy.

The salt content of the groundwater was also slightly greater under the oak plot. (The conductivities of groundwater are: oak-1023, pasture-960 $\mu\text{S}/\text{cm}$). The differences do not mean any problem for forest vegetation productivity and vitality, but salt accumulation

induced by climate change can be a long term effect of afforestation in these kinds of soils and hydrological combinations. Noretto et al. (2007) also detected a higher conductivity of groundwater under an oak forest than under grassland in Hortobágy, but the absolute magnitudes were significantly higher at 4900 $\mu\text{S}/\text{cm}$ and 2000 $\mu\text{S}/\text{cm}$ under an oak forest and grassland.

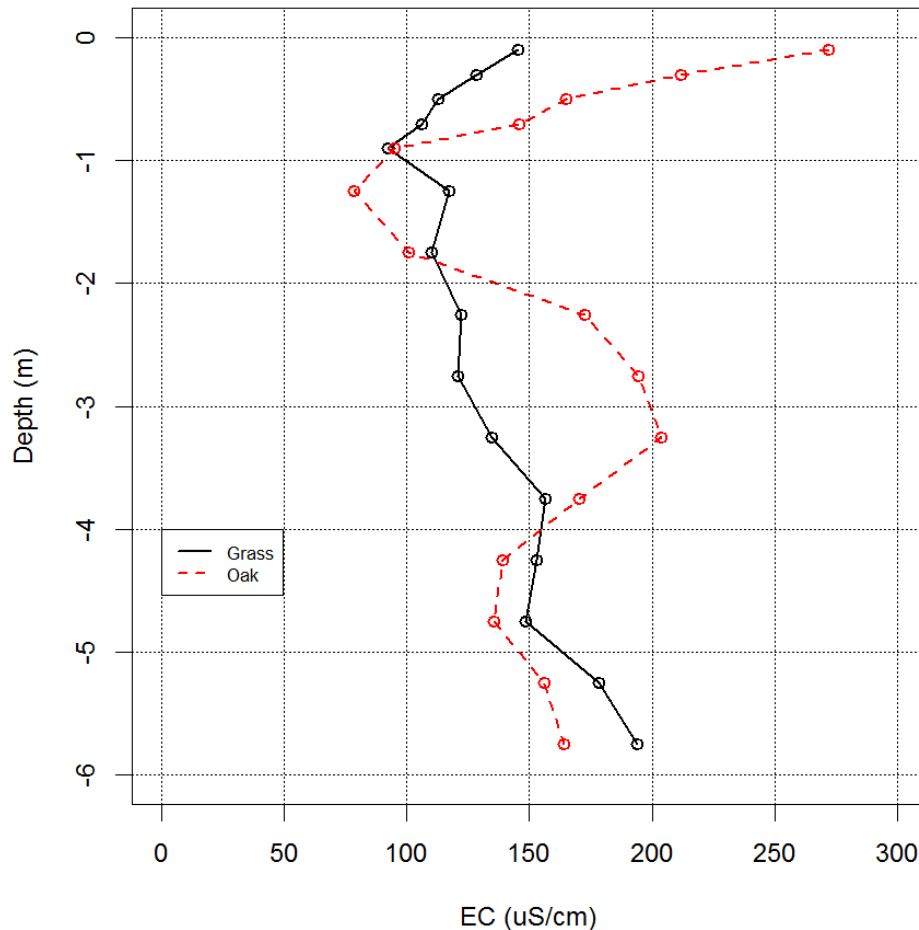


Figure 8. Electrical conductivity (EC) profile under the pasture and oak forest

4 CONCLUSIONS

Hydrological characteristics of earlier land uses during the last century (grassland and arable land) in the Great Plain are significantly different from those of the forest. A larger biomass needs a higher amount of transpiration which can be taken up from the groundwater by the deeper root system of the forest if precipitation is insufficient. Increased groundwater uptake results in a depression of the water table under forest covered sites in areas with a shallow groundwater table.

The larger amount of forest groundwater use is not parallel with salt uptake. Therefore salts can accumulate in both the soil and groundwater. The measured differences in salt content are small compared to similar research results for clayey soils (Noretto et al. 2007). However in the long run, and taking into account longer dry periods induced in the future by climate change, this process can result in the decline of biological production of a forest.

Table 1 summarizes the results of these processes comparing an oak forest and neighboring pasture on the basis of the dataset of this study.

Table 1. Summary of impacts of an oak forest on water and salt dynamics
(EC=electric conductivity; GW=groundwater)

Parameter	Oak	Pasture	Process
EC GW ($\mu\text{S}/\text{cm}$)	1023	960	Salt cc. of GW increases
EC soil 0–20 cm ($\mu\text{S}/\text{cm}$)	272	145	Salt accumulation in upper soil layer
EC soil 300–350 cm ($\mu\text{S}/\text{cm}$)	204	134.9	Salt accumulation in lower soil layer
GW level (asl [mBf])	101.5	102.4	Water table depression (0.9 m)
Water table depth (m from surface)	3.26	2.82	Water table difference from surface (0.44 m)
Diurnal signal amplitude (cm)	16	7.2	Stronger diurnal signal of oak (ratio 2.2)
ET from GW (mm/day)	7.6	3.3	Greater GW uptake of oak (ratio 2.3)

Acknowledgements: The research of Zoltán Gribovszki was supported by the European Union and the State of Hungary, co-financed by the European Social Fund in the framework of TÁMOP 4.2.4. A/2-11-1-2012-0001 'National Excellence Program'. The relating research group was also supported by a fund from OTKA (NN 79835) and TAMOP-4.2.2.A-11/1/KONV-2012-0013 project.

REFERENCES

- ALLEN, R.G. – PEREIRA, L.S. – RAES, D. – SMITH, M. (1998): Crop evapotranspiration – Guidelines for computing crop water requirements. Vol. 56 of FAO Irrigation and Drainage. FAO, Rome, URL <http://www.fao.org/docrep/X0490E/x0490e06.htm>.
- ANDRASEVITS, Z. – BUZÁS, GY. – SCHIBERNA, E. (2005): Current afforestation practice and expected trends on family farms in West Hungary. *Journal of Central European Agriculture*, (5): 297–302.
- BUTLER, J.J. – KLUITENBERG, G.J. – WHITEMORE, D.O. – LOHEIDE II, S.P. – JIN, W. – BILLINGER, M.A. – ZHAN, X. (2007): A field investigation of phreatophyte-induced fluctuations in the water table. *Water Resour. Res.* 43: W02404. doi: 10.1029/2005WR004627.
- CALDER, I. R. (1998): Water use by forests, limits and controls. *Tree Physiol*, 18: 625–631.
- FÜHRER, E. – JÁRÓ, Z. (2005): Az erdővagyron bővítése a mezőgazdaságilag gazdaságosan nem hasznosított földterületek beerdősítésével [Forest cover enlargement by afforestation of economically non rentable agricultural lands] (in Hungarian) In: Molnár S. (Szerk.): Erdő-fa hasznosítás Magyarországon. NyME FMK. Sopron. 130–136.
- GRIBOVSKI, Z. – KALICZ, P. – SZILÁGYI, J. – KUČSARA, M. (2008): Riparian zone evapotranspiration estimation from diurnal groundwater level fluctuations. *Journal of Hydrology* 349: 6–17, <http://dx.doi.org/10.1016/j.jhydrol.2007.10.049>
- GRIBOVSKI, Z. – SZILÁGYI, J. – KALICZ, P. (2010): Diurnal fluctuations in shallow groundwater levels and in streamflow rates and their interpretation - a review. *Journal of Hydrology* 385: 371–383, <http://dx.doi.org/10.1016/j.jhydrol.2010.02.001>
- IJJÁSZ, E. (1939): A fatenyészet és az altalajvíz, különös tekintettel a nagyalföldi viszonyokra [Forest and groundwater connections in Hungarian Great Plain] (in Hungarian) *Erdészeti Kísérletek*, 42: 1–107.
- JOBÁGY, E. G. – JACKSON, R. B. (2004): Groundwater use and salinization with grassland afforestation. *Global Change Biol.*, 10: 1299–1312.
- LOHEIDE II, S.P. – BUTLER, J.J. – GORELICK, S.M. (2005): Use of diurnal water table fluctuations to estimate groundwater consumption by phreatophytes: A saturated–unsaturated flow assessment. *Water Resour. Res.* 41: W07030. doi: 10.1029/2005WR003942.

- MAGYAR, P. (1961): Alföldfásítás II. [Afforestation in Hungarian Great Plain II.] (in Hungarian) Akadémiai Kiadó. Budapest.
- MAJOR, P. (2002): Síkvidéki erdők hatása a vízháztartásra [Effect of lowland forest on water balance] (in Hungarian) Hidrológiai Közlöny, 82: 319–324.
- MÓRICZ, N. – MÁTYÁS, C. – BERKI, I. – RASZTOVITS, E. – VEKERDY, Z. – GRIBOVSKI, Z. (2012): Comparative water balance study of forest and fallow plots. iForest 5: 188–196 [online 2012-08-02] URL: <http://www.sisef.it/iforest/contents?id=ifor0624-005>
- NOSETTO, M. D. – ESTEBAN, E. G. – PARULEO, J. M. (2005): Land use change and water losses. The case of grassland afforestation across a soil textural gradient in central Argentina. Global Change Biol. 11: 1101–1117.
- NOSETTO, M. D. – JOBBÁGY, E. G. – TÓTH, T. – DI BELLA, C. M. (2007): The effects of tree establishment on water and salt dynamics in naturally salt-affected grasslands. Oecologia (152): 695–705.
- NOSETTO M. D. – JOBBÁGY M. G. – TÓTH T. – JACKSON R. B. (2008): Regional patterns and controls of ecosystem salinization with grassland afforestation along a rainfall gradient. Global Biogeochemical Cycles 22: GB2015, doi: 10.1029/2007GB003000
- SOYLU, M. E. – LENTERS, J. D. – ISTANBULLUOGLU, E. – LOHEIDE II, S. P. (2012): On evapotranspiration and shallow groundwater fluctuations: A Fourier-based improvement to the White method, Water Resour. Res. 48: W06506, doi: 10.1029/2011WR010964.
- SZABÓ, A. – KISS, K. – GRIBOVSKI, Z. – TÓTH, T. (2012): Erdők hatása a talaj és altalaj sóforgalmára, valamint a talajvíz szintjére [Effect of forests on the salt accumulation of soils and subsoils and on the watertable level.] (in Hungarian) Agrokémia és Talajtan. 61: 195–209.
- SZILÁGYI, J. – KOVÁCS, Á. – JÓZSA, J. (2012): Remote sensing based groundwater recharge estimates in the Danube-Tisza Sand Plateau region of Hungary. J. Hydrol. Hydromech. 60: 64–72, doi: 10.2478/v10098-012-0006-3
- SZODFRIDT, I. – FARAGÓ, S. (1968): Talajvíz és vegetáció kapcsolata a Duna–Tisza köze homokterületén [Vegetation and groundwater connections in Kinkunság sand areas] (in Hungarian) Bot. Közlem. 55: 69–75.
- WHITE, W. N. (1932): Method of estimating groundwater supplies based on discharge by plants and evaporation from soil – results of investigation in Escalante Valley, Utah - US Geological Survey. Water Supply Paper 659-A: 1–105.

Guide for Authors

Acta Silvatica et Lignaria Hungarica publishes original reports and reviews in the field of forest, wood and environmental sciences. ASLH is published twice a year (Nr. 1 and 2) in serial volumes. It is online accessible under: <http://aslh.nyme.hu>

Submission of an article implies that the work has not been published previously (except in the form of an abstract or as part of a published lecture or academic thesis), that it is not under consideration for publication elsewhere. Articles should be written in English. All papers will be reviewed by two independent experts.

Authors of papers accepted for publication should sign the Publishing Agreement that can be downloaded from the homepage (<http://aslh.nyme.hu>).

All instructions for preparation of manuscripts can be downloaded from the homepage.

